

FIND WHAT MATTERS

IN A
BURRIS OPTIC

BALLISTIC SERVICES	4 6 8 0
	8
	Ĭ
HUNTING	0
ELIMINATOR® III LASERSCOPES® 1	
VERACITY® RIFLESCOPES 1	2
FULLFIELD™ RIFLESCOPES 1	6
FULLFIELD IV TM RIFLESCOPES 1	8
SIGNATURE HD™ RIFLESCOPES 2	0
SCOUT RIFLESCOPES 2	4
HANDGUN SCOPES 2	5
SPEEDBEAD™ SHOTGUN MOUNT 2	6
ORACLE BOWSIGHT 2	8
BINOCULARS 3	0
SIGNATURE HD™ SPOTTING SCOPE 3	1
TACTICAL 3	2
XTR III RIFLESCOPES 3	4
XTR II RIFLESCOPES 3	6
RT SERIES 3	8
T.M.P.R.™ SERIES	2
AR SIGHTS	4
FASTFIRE TM 4	6
RINGS, MOUNTS, RETICLES	
AND ACCESSORIES	8
RINGS AND MOUNTS 5	0
RETICLES 5	6
HUNTNG PRODUCT SPECS 7	0
TACTICAL PRODUCT SPECS 7	6
WARRANTY AND CUSTOMER SERVICE 8	3

2020 NEW PRODUCTS

NEW FULLFIELD IV SERIES

Page 18

The Fullfield has targeted more big game, for more hunters, in more places, than anything we offer. The next-gen IV Series amps it up with fresh 4x zoom optics, more reticle choices, sleek new profile, and a trophy-proven rep for being the only scope a rifle shooter may ever need.



The state of the s

NEW SIGNATURE HD SERIES

Page 20

With both front and rear focal plane reticle systems, short knobs for long-shot holdovers or tall turret knobs for dialing in range, and choice of 5 illuminated and non-illuminated reticles -- including one specifically for 6.5 Creedmoor - the affordable new Signature HD lets you make a tricked-out precision scope your own.

NEW RT SERIES PRODUCTS

Page 38

Trust the tactical RT to sharpen your edge at any distance. Choose the acclaimed short-range RT 1-6x, new mid-range 3-15x, or long-range 5-25x. Scope out new 1x and 3x red dots. With proprietary features straight from the high-end shelf, every RT is built to take your skills to the next level.





NEW FASTFIRE PRODUCTS

Page 46

Introducing one sight for any weapon platform, any tactical competition, any form of defense, any style of hunting: Fast-Fire. Evolved, refined and advanced for 10 years, with new red dot options, longer battery life, and greater versatility, there's a battle-ready FastFire for every kind of firearm and any kind of shooting.



THE LEADER IN LASERSIGHT TECHNOLOGY

Burris Eliminator — the original laser rangefinding scope and still the best in its class. Compared to similar scopes, it's simple and easy to use. There are no apps to download, or additional gear to fumble with. You'll never miss a shot. Just find your target, range and shoot. The new Eliminator IV offers more performance with extended range and enhanced ballistic software.



THE NEXT GENERATION OF THE BURRIS ELIMINATOR

The **new Eliminator IV** significantly extends the range and accuracy of your favorite rifle. With ranging capability out to 2,000 yards, it greatly increases the distance at which you can make an ethical shot. A new onboard ballistics calculator offers more data and faster aiming solutions. Bluetooth laser activation has been added to make it easy to range your target. With a trophy in sight, there's no need to fumble with smart phones and handheld range finders. Just aim, range and shoot. It's that simple.



Bluetooth Remote

WINDAGE COMPENSATION In addition to distance, the scope's digital display will show a 10 mph Wind Value for your specific cartridge at the indicated range to your target.





Example 300 yards | 10-mph crosswind shooter holds .9 dots into the wind

Example 500 yards | 10-mph crosswind shooter holds 1.7 dots into the wind

FOUR TOOLS IN ONE ADVANCED **OPTIC!**











The Burris Eliminator family of riflescopes are unlike any other scope. Combining four tools into one advanced optic. Eliminating problems, so you can focus on the shot.

- Precision Optic. All lenses are fully multi-coated for sharp, crisp, edge-to-edge clarity
- Digital Inclinometer. An internal inclinometer delivers a precise aiming point for angled shots up to 45°
- Smart Dope Card. Simply program your cartridge and load into the Eliminator. The precise holdover is automatically determined
- Laser Range Finder. The builtin laser rangefinder will instantly determine the distance to your target out to 2,000 yards



6

BURRIS BALLISTIC SERVICES 2.0

BALLISTICS.BURRISOPTICS.COM

The newly updated Burris Ballistic Services is a set of sophisticated online ballistic tools that will allow you to master any Burris ballistic compensating reticle, build a dope card, program your Eliminator riflescope, or order custom elevation knobs. Burris Ballistic Services will turn you into a reticle expert and a pro on the shooting range.

BALLISTIC RETICLE ANALYSIS CALCULATOR

Burris offers a wide variety of reticles, and this tool ensures you can utilize their full potential.











Burris Ballistic Plex E1

BurrisOptics.com/Ballistics



BULLET LIBRARY STEP 2 Select Ammunition Type

Ballistics really begin with your bullet. The better the bullet info, the better your results. The Burris Ballistic Services tools are centered around the best bullet and cartridge libraries in the business: almost 7,000 different cartridges and bullets are included from nearly every manufacturer.

DOPE CARD

The Dope Card tool was designed with the serious shooter in mind, but it's also a great way for anyone to learn more about long-range shooting. The Burris Dope Card tool provides a level of detail that goes beyond the vast majority of ballistic tools available now.





ELIMINATOR LASER RIFLESCOPE

The Eliminator LaserScope requires basic programming to work correctly. Using our industry-leading bullet library and ballistic engine, you can now quickly get the ballistic information needed to program your Eliminator scope.

CUSTOM SERVICES AND TECHNICAL HELP

The Burris Custom Shop can help you upgrade the knobs and reticles on many of our riflescopes. Prices will vary depending upon the model and upgrade desired. Here are some approximate costs:

- Knob upgrades start at \$40
- Custom MAD knobs start at \$50
- Reticle changes start at \$60

For specific costs and ordering, call the Technical Support line at 888-440-0244.



FIND WHAT MATTERS

M.A.D. SYSTEM

The Modular Adjustment Dial (M.A.D.) System lets you choose from exposed competition-style knobs or capped knobs for windage and elevation adjustments.

You can also add custom knobs with laser-etched markings that perfectly match the trajectory of any ammunition.

The following configurations are possible in the M.A.D. System:

- Capped knobs with Mil or MOA markings
- · Exposed knobs with Mil or MOA markings
- Capped knobs with custom trajectory markings
- Exposed knobs with custom trajectory markings


Shooters will be able to order custom knobs through Burris Customer Service at https://ballistics.burrisoptics.com/

The M.A.D System is available for select XTR II and Veracity models. In mid-year 2020, it will also be available for Fullfield IV, Signature HD and RT riflescopes.

	ELEVATION		WINDAGE		
XTR III		Exposed non-M.A.D.)	Race Dial	Low Capped	Low Exposed
201200	3.3-18x50mm	1.	•		
201201	3.3-18x50mm	•	•	•	•
201202	3.3-18x50mm	·	•		•
201210	5.5-28x56mm	•	0	•	1.
201211	5.5-28x56mm	•	•		•
201212	5.5-28x56mm		•		
XTR II		M.A.D. Capped	M.A.D. Exposed	M.A.D. Capped	M.A.D. Exposed
201018	1-8x24mm	12. TE			0
201019	1-8x24mm	•			0
VERACI	ľ	M.A.D. Capped	M.A.D. Exposed	M.A.D. Capped	M.A.D. Exposed
200621	2-10X42mm	•	0		0
200636	3-15x50mm	•	0	•	0
200641	4-20x50mm	•	0 (•	0
200651	5-25×50mm	•	0	•	0
200652	5-25x50mm	1	•	•	•

- Installed on scope
 Packaged with scope
- Optional contact for purchase





The following list of Burris riflescopes can accept custom knobs and options can be ordered using the Custom Knob tool:

- AR RIFLESCOPES
- C4 PLUS
- DROPTINE
- FULLFIELD E1
- MSR RIFLESCOPES
- PREDATOR QUEST

VERACITY










Burris

ELIMINATOR®

LASERSCOPES

Two words: no guesswork. It's plug and play in a even bigger: Just feed the ballistic info and the scope calculates perfect holdover at your exact distance, estimates wind drift, then gives you a bright red dot of accuracy in seconds—all at







NEW ELIMINATOR IV LASERSCOPE 4-16x50mm

ITEM NUMBER: 200133

RETICLE: **X96 RETICLE**

ADJUSTABLE PARALLAX: **50 YDS. TO INFINITY**

- Powerful laser rangefinder extends your range to 2,000 yards
- Improved ballistics calculator accommodates centerfire, rimfire, muzzleloader and slug gun loads
- Wireless Bluetooth remote for laser activation
- Proven X96 reticle displays a 10-mph wind value to indicate wind hold-off for your specific cartridge at the indicated range
- Mounts to any Weaver-style or Picatinny base. No rings required



Bluetooth Remote





ELIMINATOR III LASERSCOPE 4-16x50mm

ITEM NUMBER: 200116

RETICLE: X96 RETICLE

ADJUSTABLE PARALLAX: 50 YDS. TO INFINITY

High magnification extends your long-range shooting capability

- 50 mm objective allows for maximum light transmission
- Strong, low mounting system fits any Weaver-style or Picatinny base; no rings required
- X96 Reticle displays a 10-mph wind value to indicate wind hold-off for your specific cartridge at the indicated range
- Now Includes Ballistic software that accommodates centerfire, rimfire, muzzleloader and slug gun loads



SERIES FEATURES

- Customized trajectory compensation calculates the perfect holdover at your exact distance; program your cartridge's ballistics information, push a button, and a bright red illuminated dot signifies your new aiming point in a split second
- Built-in laser rangefinder eliminates the need for smart phone apps and hand-held lasers
- Trajectory compensation is accurate at any magnification
- Integrated inclinometer compensates for shots at any uphill or downhill angle



Burris.

VERACITY®

RIFLESCOPES









The finest in premium, high

light-transmitting scopes.

5x zoom and front or rear focal plane reticles deliver excellent target acquisition and a closer look at the big, bright picture.









ITEM NUMBER: 200621 (M.A.D.)

BALLISTIC PLEX E1™ FFP

RETICLE: BALLISTIC E2™ RFP

ITEM NUMBER: 200622 (M.A.D.)

· Low-profile adjustment knobs are finger-adjustable for windage and elevation; easily indexed to zero once

MAIN TUBE SIZE: 30 mm ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY



VERACITY RIFLESCOPE 3-15x50mm

ITEM NUMBER: 200636 (M.A.D.) ITEM NUMBER: 200638 (M.A.D.)

RETICLE: BALLISTIC E2™ RFP **BALLISTIC PLEX E1™ FFP**

· Low-profile adjustment knobs are finger-adjustable for windage and elevation; easily indexed to zero once

• 50 mm objective allows for maximum light transmssion

MAIN TUBE SIZE: 30 mm ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY







VERACITY RIFLESCOPE 4-20x50mm

ITEM NUMBER: 200640

MAIN TUBE SIZE:

30 mm

RETICLE:
BALLISTIC PLEX E1™ FFP VARMINT

> ADJUSTABLE SIDE PARALLAX: **50 YDS. TO INFINITY**

ITEM NUMBER: 200641 (M.A.D.)

BALLISTIC PLEX E1™ FFP

- Designed for precise adjustment at extreme ranges, perfect for varmint hunting; multi-turn target knobs offer up to 15 MOA of adjustment per rotation
- 50 mm objective allows for maximum light transmssion
- Ergonomic side focus allows easy-to-reach parallax adjustment
- Zero Click Stop adjustment knobs allow quick, easy return to original sight-in setting without counting rotations

VERACITY SERIES FEATURES

- Our top-of-the-line hunting scopes featuring a 5x zoom system, a larger field of view and front focal plane design
- Front focal plane reticle allows the reticle size to increase or decrease with magnification so trajectory compensation is always correct for the selected power setting
- Advanced windage and elevation adjustment is accurate and repeatable, and matches the reticle's MOA measurement system

VERACITY RIFLESCOPE 5-25x50mm

ITEM NUMBERS: 200650

BALLISTIC PLEX E1™ FFP VARMINT

ITEM NUMBER: 200651 (M.A.D.)


RETICLE: BALLISTIC PLEX E1™ FFP ITEM NUMBER: 200652 (M.A.D.)

RETICLE: SCR™ MOA

MAIN TUBE SIZE: 30 mm ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

- Designed for precise adjustment at extreme ranges, perfect for varmint hunting; MAD knobs offer 24.5 MOA of adjustment in one rotation
- 50 mm objective allows for maximum light transmission
- Ergonomic side focus allows easy-to-reach parallax adjustment
- Zero Click Stop adjustment knobs allow quick, easy return to sight-in yardage setting without counting rotations

RETICLES













Burris

FULLFIELD

RIFLESCOPES

If you had to pick just one scope that defines our DNA, it would be the Fullfield. The original Fullfield and Fullfield E1 represent 50 years of performance and reliability and lots of filled tags.



FULLFIELD E1 RIFLESCOPE 6.5-20x50mm

ITEM NUMBER: 200341

High magnification extends your long-range shooting capability
Ergonomic side focus allows easy-to-reach parallax adjustment

RETICLE: BALLISTIC PLEX E1™ MV

MAIN TUBE SIZE: ADJUSTABLE SIDE PARALLAX:

in. 50 YDS. TO INFINITY

FULLFIELD E1 RIFLESCOPE 4.5-14x42mm

ITEM NUMBER: **200338**

RETICLE: BALLISTIC PLEX E1™

- High magnification extends your long-range shooting capability
- Ergonomic side focus allows easy-to-reach parallax adjustment

MAIN TUBE SIZE:

ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

FULLFIELD E1 RIFLESCOPE 3-9x40mm

ITEM NUMBERS: 200320

RETICLE: BALLISTIC PLEX E1™

MAIN TUBE SIZE: 1 in.

- Most popular and versatile model
- Available illuminated reticle has 10 settings from low light to daylight; reduces time to get on target in any lighting condition and increases accuracy when target is dark









URRIS OPTICS 2020

FULLFIELD II RIFLESCOPE 6.5-20x50mm

ITEM NUMBER: 200193 RETICLE: MAIN TUBE SIZE:

1 in.

RETICLE: ADJUSTABLE PARALLAX: BALLISTIC MIL-DOT 50 YDS. TO INFINITY

High magnification and mil-dot reticle extends long-range shooting capability

- 50 mm objective allows maximum light collection
- Parallax adjustment provides improved accuracy at long distances

FULLFIELD II RIFLESCOPE 4.5-14x42mm

ITEM NUMBER: 200183

MAIN TUBE SIZE:

RETICLE: ADJUSTABLE PARALLAX: BALLISTIC PLEX™ 50 YDS. TO INFINITY

High magnification extends long-range shooting capability

Parallax adjustment provides improved accuracy at long distances

FULLFIELD II RIFLESCOPE 3-9x40mm

ITEM NUMBER: 200162

1 in.

MAIN TUBE SIZE:

RETICLE:

BALLISTIC PLEXTM

• 3-9x zoom range is versatile enough for any game--big or small

 Ballistic Plex reticle provides trajectory compensation out to 400 yards

FULLFIELD II AND FULLFIELD E1 SERIES FEATURES

- Choice of ballistic plex reticles. Both MOA and Mil on Fullfield and Ballistic Plex E1[™] reticle with trajectory compensation out to 500 yards and cascading dots for crosswinds
- High-grade optical glass provides excellent brightness and clarity with lasting durability
- Index-matched, HiLume[™] multi-coating aids in low-light performance and glare elimination, increasing your success rate
- Finger-adjustable windage and elevation knobs create a sleek profile; knob indications always reflect a change in the point of impact for pinpoint accuracy







RETICLES

Ballistic Plex

Ballistic Plex E1™MV

Ballistic Plex™

Ballistic Mil-Dot

Burris

FULLFIELD I

RIFLESCOPES

On any hunt, there's a few things you can count on. Wary game. Lousy weather. And your Fullfield IV scope. After nearly 50 years of steady performance and constant refinement, the latest Fullfield is the surest companion a hunter can have.











NEW FULLFIELD IV RIFLESCOPE 2.5-10x42mm

ITEM NUMBERS: 200485

RETICLE: BALLISTIC E3™ ITEM NUMBERS: 200486

RETICLE: BALLISTIC E3™ ILLUMINATED

ITEM NUMBERS: 200487

RETICLE: **PLEX**TM Wide field-of-view

• Rugged, lightweight design

• Finger adjustable windage/elevation turrets

MAIN TUBE SIZE: 1 in.



NEW FULLFIELD IV RIFLESCOPE 3-12x56mm

ITEM NUMBERS: 200491

RETICLE: BALLISTIC E3™ ILLUMINATED

MAIN TUBE SIZE: 1 in.

• Large 56mm objective for better light transmission

• Illuminated reticle for low light performance

• 30mm tube offers more adjustment range



NEW FULLFIELD IV RIFLESCOPE 3-12x42mm

ITEM NUMBERS: 200488

LONG RANGE MOA™


ITEM NUMBERS: 200489 RETICLE:

C4 WIND MOA™ ILLUMINATED

ITEM NUMBERS: 200490 RETICLE:

BALLISTIC E3™

plex reticles



Choice of three ballistic



Ballistic E3™

Ballistic E3TM Illuminated

RETICLES

0 PTICS

MAIN TUBE SIZE: 1 in.

NEW FULLFIELD IV RIFLESCOPE 4-16x50mm

ITEM NUMBERS: 200492 RETICLE:

BALLISTIC E3™ ILLUMINATED

ITEM NUMBERS: 200493 RETICLE: 6.5 CM™

ITEM NUMBERS: 200494 RETICLE:

LONG RANGE MOA™ ILLUMINATED

- Large 50mm objective for better light transmission
- Available with dedicated 6.5 Creedmoor reticle
- Side parallax adjustment





Long Range MOA™ Illuminated

MAIN TUBE SIZE: 1 in.

NEW FULLFIELD IV RIFLESCOPE 6-24x50mm

ITEM NUMBERS: 200495 RETICLE: BALLISTIC E3™

ITEM NUMBERS: 200496 RETICLE: FINE PLEX™


ITEM NUMBERS: 200497 RETICLE: SCR MOA™

- Ideal for long-range target shooting
- Choice of three precision reticles
- Side parallax adjustment

MAIN TUBE SIZE: 30 mm

FULLFIELD IV SERIES FEATURES

- Improved 4x zoom system with premium, multi-coated lenses for edge-to-edge clarity and low light performance
- Wide selection of reticles for both hunting and long-distance target shooting
- 1" and 30mm tube options
- Sleek new design with finger adjustable turret knobs, adjustable parallax (select models)



Burris.

SIGNATURE HD

RIFLESCOPES









WATERPROC

PROOF SI

CKPROOF FOO

NITROGEN-FI

When you're ready to step up, the Signature HD is the right choice.
Designed to make the most of your experience, with the precise features, reticles, reliability and ease of use that seasoned hunters like you demand -- and the monsters you're after can't escape.



NEW SIGNATURE HD RIFLESCOPE 5-25×50mm

ITEM NUMBERS: 200533

BALLISTIC E3™
ILLUMINATED

ITEM NUMBERS: 200534

RETICLE: FINE PLEX™ ITEM NUMBERS: **200535**

RETICLE: 6.5 CM™ ILLUMINATED

- Great choice for NRL 22 precision rimfire matches
- Available with dedicated 6.5 Creedmoor reticle
- Zero stop turrets

MAIN TUBE SIZE: 30 mm





NEW SIGNATURE HD RIFLESCOPE 3-15x44mm

ITEM NUMBERS: 200531 RETICLE: BALLISTIC E3™

ILLUMINATED

ITEM NUMBERS: 200532 RETICLE: PLEX™ Mid-range scope in hunting and target models (low and high knobs)

• Choice of illuminated or non-illuminated MOA reticles

MAIN TUBE SIZE: 1 in.

NEW SIGNATURE HD RIFLESCOPE 2-10x40mm

ITEM NUMBERS: **200530**

RETICLE: BALLISTIC E3™ • Versatile scope that's perfect for rimfire, centerfire and muzzle loader rifles

 Ballistic E3 reticle provides a simple method for determining holdover for distance and hold-off for wind drift

MAIN TUBE SIZE: 1 in.

SIGNATURE HD SERIES FEATURES

- 5x zoom system with premium, multi-coated glass for crisp, bright images
- New push/pull locking turrets
- Available with a wide choice of front and rear focal plane reticles
- Side parallax adjustment on most models
- Zero stop feature on all target knobs





RETICLES











Burris. SCOUT RIFLESCOPES













Specifically designed to match scout rifles, our slim, compact optics

give you low-to-medium magnification, perfect for

close- to mid-range targets.

Placed well forward on

the rifle, you'll get—and

keep—both eyes perfectly

on targets both moving and

still. When that happens,

well, we all know what


goes down next.

FOREVER WARRANTY

NO QUESTIONS ASKED A

NO SESSIONS ASSED A

NO SESSIONS



ITEM NUMBER: 200261

RETICLE: BALLISTIC PLEX™ MAIN TUBE SIZE:

Variable power for versatility and improved accuracy at longer distances



SCOUT RIFLESCOPE 2.75x20mm

ITEM NUMBER: 200269

RETICLE: HEAVY PLEX


MAIN TUBE SIZE:

 Fixed 2.75x power, the perfect magnification setting for both-eyes-open scout rifle shooting

SCOUT SERIES FEATURES

- Specifically designed for the multi-purpose scout rifle concept popularized by Col. Jeff Cooper
- · Compact and lightweight, so it's easy to carry your rifle in the field
- Forward mounting design allows mounting in front of the ejection port, for extended eye relief and both-eyes-open shooting with unobstructed access to the cartridge port; beneficial for fast target acquisition and increased situational awareness

RETICLES



Burris

HANDGUN

SCOPES



Given handgun hunters
employ some seriously
impressive cartridges,
these durable and
reliable scopes are
purpose-built with superb
recoil absorption and long
eye relief appropriate for
heavy recoil long range
shooting.





HANDGUN SCOPE 2x20mm

ITEM NUMBERS: 200218, 200229

RETICLE: PLEX

MAIN TUBE SIZE: 1 in.

Most compact and lightweight configuration in the product line

• Available with matte black (200218) or nickel finish (200229)

HANDGUN SCOPE 2-7x32mm

ITEM NUMBERS: 200279, 200299

RETICLE:
BALLISTIC PLEXTM

ITEM NUMBERS: 200291, 200298

RETICLE: PLEX

- Variable 2-7x magnification offers greater field versatility
- Available with matte black (200279) or nickel finish (200299)
- Available Posi-Lock™ system (item 200299) uses a retractable steel post in addition to the springs of a conventional adjustment system, to keep the point of aim firmly locked in place.

MAIN TUBE SIZE: 1 in.

HANDGUN SCOPE 3-12x32mm

ITEM NUMBER: 200309

RETICLE:

BALLISTIC PLEX™

MAIN TUBE SIZE:

1 in.

Large magnification extends your long-range shooting capability


• Parallax adjustment for improved accuracy at any distance

ADJUSTABLE PARALLAX: 25 YDS. TO INFINITY

HANDGUN SCOPES FEATURES

- Compact, lightweight scopes with long eye relief create the perfect platform for handgun hunting
- Double internal spring-tension system allows the scope to hold zero through shock, recoil, and vibrations
- Durable, stress-free, solid 1-piece outer tube withstands shock and vibrations of even the heaviest-recoiling calibers
- High-grade optical glass provides excellent brightness and clarity





26



SPEEDBEAD

Burris

SHOTGUN

MOUNTS

No other system exists for mounting a FastFire™ optic ultralow and perfectly in line with the natural sighting plane of the shotgun. Improve your speed and accuracy over waterfowl, upland birds, turkeys or clays.



FASTFIRE™ 3 WITH SPEEDBEAD SHOTGUN MOUNT

- Includes both 8-MOA Fastfire 3 red dot sight and SpeedBead Shotgun Mount in one package
- Mounts low between the stock and receiver
- Line of sight falls just above the vented rib for accurate
- 1x magnification allows both-eyes-open shooting
- Parallax free, for improved accuracy
- CR-1632 battery with automatic time-out feature lasts up



FastFire™ 3 8-MOA Dot

	C all ald
Item	Compatible with Shotgun
300240	Benelli® Super Black Eagle II
300241	12 Ga. Benelli® M2, Montefeltro, Ultra Light
300253	Beretta® A400 Xplore
300244	Beretta® Xtrema/2, 391, 391 Light, Urika/2
300245	Remington® 870
300248	Remington® 1100, 1187

SPEEDBEAD SHOTGUN MOUNTS

- SpeedBead Shotgun Mount only; FastFire optics sold separately
- Compatible with many popular shotguns
- All SpeedBead Shotgun Mounts are compatible with all FastFire red dot
- Mounts between the stock and receiver

Item	Compatible with Shotgun
410670	Benelli® Super Black Eagle II
410671	Benelli® Super Black Eagle (original) 12ga
410672	Benelli® M2, 12 Ga., Montefeltro, Ultra Ligh
410673	Benelli® M1, 12 Ga.
410674	Benelli® Legacy 12 Ga., Sport II, Super Spor Cordoba
410687	Benelli® M2 20 Ga.
410677	Beretta® A400 Xplore
410678	Speed Bead, Beretta Xtrema/2, 391, 391 Light, Urika/2
410679	Franchi® I-12
410680	Remington® 870
410681	Remington® 1100, 1187

Windage and elevation adjustments let you fine-tune your aiming point to the center of your shot pattern.

SpeedBead mount installs between the buttstock and receiver; works with any shim kit.

Item	Compatible with Shotgun
410686	Remington® Versa Max
410683	Stoeger® 3500
410684	Winchester® SX3; Browning® Gold 12 Gauge
410685	Browning® Maxus 12 Gauge
	2
Item	Description
410355	SpeedBead Mount Riser – 1/8 in.
410254	Speed Panel Marriet Diagr. 1/4 in

SpeedBead mount aligns the red dot lower than any other optic on the market for accurate and instinctive shooting.





Burris

ORACLE

BOW SIGHT

A game changer for bow hunters. It instantly provides exact distance to target and exact aiming point. Built off of a decade of rangefinding and ballistic compensation experience with the Eliminator riflescope. Built-in rangefinder gives exact distance to the target at full draw. Instantly calculates and displays the exact aiming point for any distance and shot angle.









ORACLE RANGEFINDING BOW SIGHT

ITEM NUMBERS: **300400**

- All Aluminum Construction
- Locking Micro Adjustment Knobs
- Increase shooting distances out to 80 110 yards
- Accommodates up to 184 inches of drop at 100 yards.
- Stores two different trajectory curves for different arrows or draw weights
- Right or Left-hand compatible
- Rear Peep Improves Shot Accuracy and Consistency
- 2nd and 3rd Axis Adjustments
- Water Resistant







HOW IT WORKS

- 1 Just sight in at 20 yards and two farther distances and the Oracle learns your entire trajectory curve.
- 2 A rangefinder measures the exact distance to your target while at full draw.
- 3 The Oracle instantly calculates the perfect trajectory compensation for the distance and shot angle.
- 4 The sight displays exact aiming point for your shot.

ORACLE FEATURES

- No glass to glare, scratch or fog for any conditions. Don't let your trophy of a lifetime walk away because you couldn't see clearly through your sight
- Built in fixed 20-yard pin to give you supreme confidence that you will always have a pin to reference, no matter what
- Sighting in the Oracle is fast and precise with micro adjustment knobs that lock down rock solid
- Compatible with arrow speeds from 200 420 fps
- Right and Left-hand compatible

EASY PUSH-BUTTON ACTIVATION



Activate sight at full draw!

Burris BINOCULARS

SIGNATURE HD & DROPTINE

Hunters have trusted Burris optics for over 40 years and the new **Droptine and Signature** binoculars continue the tradition of reliability, affordability and performance. Versatile enough for any style of hunting, they are big on performance but won't slow you down.



SIGNATURE HD BINOCULARS 8x42mm

ITEM NUMBER: 300292

· 8x magnification and HD glass for optimal light transmission and true color fidelity

SIGNATURE HD BINOCULARS 10x42mm

ITEM NUMBER: 300293

• 10x magnification brings the minute details into focus without additional weight and bulk.



SIGNATURE HD BINOCULARS 12x50mm

ITEM NUMBER: 300294

• 12x magnification is the best choice for wide open country and terrain and larger 50mm objectives offer better detail in low light

SIGNATURE HD SERIES FEATURES

- High-performance HD lenses and BaK-4 prisms produce sharper images and edge-to-edge clarity
- Open bridge design reduces weight and is comfortable to hold
- Nitrogen filled for waterproof and fogproof performance in harsh weather conditions
- Robust aluminum eyecups for extreme ruggedness















DROPTINE BINOCULARS 8x42mm

ITEM NUMBERS: 300290

- 8x magnification provides detail and a wide field-of-view
- Full size performance in compact, light-weight package



DROPTINE BINOCULARS 10x42mm

ITEM NUMBERS: 300291

• 10x magnification is ideal for scouting eastern whitetail or western mule deer

DROPTINE SERIES FEATURES

- BaK-4 prisms and fully multi-coated lenses for maximum light transmission and reduced glare.
- Nitrogen filled for waterproof and fogproof performance in harsh weather conditions
- All Burris binoculars include a durable carrying case and neoprene neck strap for all-day comfort
- Robust aluminum eyecups for extreme ruggedness







Intergrated mounts will accept a FastFire red dot sight on either side

NITROGEN-FILLED

SIGNATURE

ITEM NUMBER: 300102 rain and snow HARD CASE

Built-in sun shade reduces glare and protects the objective lens from

- Both coarse and fine focusing adjustment are possible with the forward mounted focus knob
- Eyecup can be adjusted to accommodate eyeglasses
- · Lightweight, durable design with a die-cast magnesium body that is armored for greater protection in the field
- Angled eyepiece and rotating tripod mount makes it easy to use whether you're standing or prone

SPOTTER SIGNATURE HD 20-60x85mm



ITEM NUMBER:

30x WIDE ANGLE EYEPIECE

ITEM NUMBER : RETICLE:

ITEM NUMBER: 626202 RETICLE: **SCR MOA**

- An optional fixed power 30x eyepiece provides even more range, detail and a wide
- Available with your reticle choice of a SCR Mil or SCR MOA
- · Easy to install


626201 SCR MIL

SERIES FEATURES

- Premium HD glass for optimum resolution and maximum light transmission under any lighting condition
- The index-matched lenses eliminate color aberrations and produce true color fidelity across the visible light spectrum
- Nitrogen gas purging ensures waterproof, fog proof performance under extreme temperatures







Take glassing to a higher level with Burris' Signature HD Spotting Scope. With a 20-60x magnification range, you can save time and boot leather by finding and evaluating trophy animals from a mountain away. The HD lenses and apochromatic lens system eliminate color fringing and deliver superb edge-to-edge resolution.





WHEN THERE'S FAR TOO MUCH ON THE LINE

Whether it's in the face of a threat or in heated competition, no tolerance exists for failure. There's far too much on the line, and that requires unfailing certainty and faith that your optics will help you perform and prevail when it's go time. Knowing you—and we—have done everything in our power to help that shot find its mark is what matters above all, and that starts with the name you'll see right there on your scope.

That name is Burris.



Burris XTRIII RIFLESCOPE











A Colorado original. Engineered, designed and assembled out West where distance is measure in hours instead of yards. This next generation long-range competition puts you on target at extreme ranges with Best-In-Class features such as an industry best field of view, 5x plus zoom range, choice of three front focal plane reticles, race dial options and more.



XTR III RIFLESCOPE 5.5-30x56mm

ITEM NUMBER: 201210 (Non-Illuminated)

RETICLE: SCR MIL

ITEM NUMBER: 201211 (Non-Illuminated)

RETICLE: SCR MOA

ITEM NUMBER: 201212 (Non-Illuminated)


RETICLE: SCR2 MIL

- At 30x this new optical system provides greater depth of field, sharper images, better resolution and larger eye box than competitive scopes
- · 56mm front objective delivers brighter images at high magnification under any light condition

MAIN TUBE SIZE:

ADJUSTABLE SIDE PARALLAX: 20 YDS, TO INFINITY









XTR III RIFLESCOPE 3.3-18x50mm

ITEM NUMBER: 201200 (Non-Illuminated)

RETICLE: RETICLE: SCR MOA

ITEM NUMBER: 201201 (Non-Illuminated)

201202 (Non-Illuminated)

ITEM NUMBER:

RETICLE: SCR2 MIL

- Choose from three reticles to match your shooting style. With over120 MOA in elevation adjustment, it will reach out past a mile with the 6.5 Creedmoor
- The shorter overall length balances well with any shooting platform


MAIN TUBE SIZE: **34 MM**

ADJUSTABLE SIDE PARALLAX: **25 YDS. TO INFINITY**

SERIES FEATURES

- 34mm Body tube for extended adjustment range
- 5x+ Zoom with 150° power ring rotation
- Improved optical system with a larger field of view, smaller eyepiece signature and generous eye box at all magnifications
- Oversize tactical knobs with a Race Dial option for PRS and NRL style shooting
- Three reticle options in MIL or MOA
- Zero click stop for dependability

RETICLES



Burris. XTR II RIFLESCOPES

When it comes down to a matter of inches and there is no time for chance. It's time to put absolute confidence in yourself and the performance of your XTR II scope to get you and others out of harm's way.





XTR II RIFLESCOPE 3-15x50mm

ITEM NUMBER: 201031 201034 (Non-Illuminated) RETICLE: SCR™ MIL ITEM NUMBER: 201032 RETICLE: SCR™ MOA

MAIN TUBE SIZE: **34 MM**

ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

 Versatile, combat-proven platform is ideal for mid- to long-range shooting



XTR II RIFLESCOPE 2-10x42mm

ITEM NUMBER: 201023 RETICLE: G2B MIL-DOT™ ITEM NUMBER: 201022 RETICLE: SCR™ MOA

MAIN TUBE SIZE: **34 MM**

ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

 Versatile, low-magnification scope lets you easily transition from CQB to mid-range shooting with accuracy



XTR II RIFLESCOPE 4-20x50mm

ITEM NUMBER: 201042 201045 (Non-Illuminated) RETICLE: SCR™ MIL ITEM NUMBER: 201043 RETICLE: SCR™ MOA • Popular magnification is ideal for mid- to long-range precision shooting

MAIN TUBE SIZE: 34 MM ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

XTR II RIFLESCOPE 5-25x50mm

ITEM NUMBER: 201051 201056 (Flat Dark Earth) RETICLE: SCR™ MIL ITEM NUMBER: 201054 (Non-Illuminated) RETICLE: SCR™ MIL ITEM NUMBER: 201052 RETICLE: SCR™ MOA

 Popular magnification range is ideal for long-range precision shooting

MAIN TUBE SIZE: 34 MM ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

XTR II RIFLESCOPE 8-40x50mm

ITEM NUMBER: **201080**

ITEM NUMBER: 201081 High magnification is ideal for extreme long-range shooting

RETICLE: F-CLASS MOA RETICLE: F-CLASS DCH (RFP) \bullet Features XT-80 click adjustment knob, with 80 clicks per rotation

MAIN TUBE SIZE: 34 MM ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY

SERIES FEATURES

- Versatile 5x zoom system creates a large field of view at close precise aiming at longer ranges
- Zero Click Stop and single-turn adjustment knobs
- Front and Rear Focal Plane reticle designs with 1/10th mil click values for maximum accuracy



RETICLES



Burris. SERIES

What's your shooting style-precision rifle competition, NRL 22 rimfire, 3-gun or weekends at the range? Step up your game without breaking the bank with Burris RT riflescopes and sights.





ITEM NUMBERS: 200481

RETICLE: SCR 2 MIL™

- Side parallax adjustmentt
- Front Focal Plane SCR 2 Mil reticle with 1/10 Mil adjustments
- 80 MOA total elevation travel
- Zero click stop on adjustments

MAIN TUBE SIZE:



NEW RT-15 RIFLESCOPE 3-15x50mm

ITEM NUMBERS: 200480

RETICLE: SCR 2 MIL™


- Side parallax adjustmentt
- Front Focal Plane SCR 2 Mil reticle with 1/10 Mil adjustments
- 65 MOA total elevation travel
- Zero click stop on adjustments

MAIN TUBE SIZE: 30 mm



RT-6 RIFLESCOPE 1-6x24mm

ITEM NUMBERS: 200472, 200475 (COMBO) BALLISTIC ARTM • Illuminated reticle with 11 levels of illumination



Available in matte black





Available as a Tactical Combo Kit (200475)

MAIN TUBE SIZE: 30 mm

NEW RT-1

ITEM NUMBERS: 300261

2 MOA DOT

- Compact, durable construction
- True 1x magnification
- Longer Battery Life
- Comes with high and low base mounts

SERIES FEATURES

- The RT Series was designed for competition and tactical shooting
- Choice of 1x, 5x and 6x zoom ranges for every need from close to long-range
- Ballistic AR™ and SCR 2 mil reticles with trajectory compensation out to 600 yards
- All scopes feature an integrated adjustable throw lever can be located anywhere on the power ring for a customized fit


NEW RT-3

ITEM NUMBERS: 300262

RETICLE: BALLISTIC 3X™

- Smaller footprint and lighter weight for better balance
- 3x Magnification
- Longer Battery Life
- Larger field-of-view for quick target acquisition
- Integrated Picatinny mount for optimum height

RETICLES



Ballistic 3X™



Burris

Ballistic AR™







Burris. TMIPR SYSTEM









T.M.P.R.
Power Sharing
Connectors



RPROOF SH

OF FOGPRO

OOF NITI

NITROGEN-FILLED

The T.M.P.R. SYSTEM is a modular system of purpose-specific optics that can be used individually or in combination to create the ultimate sight for any situation. Each T.M.P.R. System component has its own battery. When connected to a T.M.P.R. prism sight, they can be powered by the prism

sight's high-capacity CR123

battery.

T.M.P.R. COMPONENTS

T.M.P.R. FASTFIRE M3

ITEM NUMBERS: **300238**

- Compatible with the T.M.P.R. Prism Sights allowing for it to use the larger sight's battery instead of relying on its own battery power
- DOT SIZE: 3 MOA
- Automatic brightness sensor adjusts brightness to match the environmental conditions; also has 3 manual brightness settings
- Battery access is conveniently located on the top of the sight; automatic time-out feature after 8 hours helps battery last up to 5 years



T.M.P.R. LASER SIGHT

ITEM NUMBERS: 300221

- Red Las
- Compatible with the T.M.P.R. Prism Sights allowing for it to use the larger sight's battery instead of relying on its own battery power
- Perfect for low-light fast-action tactical shooting and home defense





T.M.P.R. PRISM SIGHTS

T.M.P.R. 3 3x32mm

ITEM NUMBERS: 300224 300228 (COMBO)

• Compact, 3x prism sight offers fast target acquisition

• Illuminated Ballistic 3X reticle

Quick detach QD Mount

• Red, Green and Blue illumination

RETICLE: **BALLISTIC 3X™**

> TMPR Components can be attached on top, left or right side of the prism sight. Simply remove any of the three panels to attach the M3 or Laser Sight. Power connector points provide shared power from prism sight's main battery.

T.M.P.R. 5 5x32mm

ITEM NUMBERS: 300226 300229 (COMBO) • 5x magnification for long-range target engagement

• Illuminated Ballistic AR reticle

Quick detach QD Mount

• Red, Green and Blue illumination

RETICLE:

BALLISTIC AR™

SERIES FEATURES

- Shares power with T.M.P.R. components: T.M.P.R. FastFire M3 and the T.M.P.R. Laser Sight (both sold separately)
- Ballistic reticle with 7 illumination levels and three colors
- Night Vision Compatible 2 night vision settings and 3 colors for 6 NV settings
- Circular reticle provides ultra-fast engagement at close distances
- Trajectory compensation out to 600 yards







RETICLES





Red, green, blue or reverts to black when battery is off.

Burris. AR SIGHTS











SHOCKPROOF FOGPROOF NITROGEN-FI

Made specifically for closequarter engagement with an AR, these compact prism sights allow for nanosecond target acquisition in the lowest-light scenarios. When it's go-time, the variety of magnifications ensures lawmen, military and competitive shooters can accurately cover any distance.





ITEM NUMBERS: **300208**

RETICLE: BALLISTIC CQ™

- Fixed 3x magnification with a 32 mm objective
- 3 reticle color settings: red, green, and black
- 5 red and 5 green illuminated settings
- Available tactical kit includes AR-332 optic, 3-MOA FastFire™ 3 red dot sight, Anti-Reflection Device, and rugged, reusable carry case





AR-536™

ITEM NUMBERS: **300210**

RETICLE: BALLISTIC CQ™

• Fixed 5x magnification with a 36 mm objective

• 3 reticle color settings: red, green, and black

• 5 red and 5 green illuminated settings



AR-1X™

ITEM NUMBERS: **300214**

RETICLE: BALLISTIC CQ™-1X

• Fixed 1x magnification with a 20 mm objective

• 3 reticle color settings: red, green, and black

• 7 red and 7 green illuminated settings with push-button activation

Night vision compatible

• 5,000+ hours of battery life with one lithium AA battery



SERIES FEATURES

- Made for competitive shooters, law enforcement personnel, and military operators
- Provides additional range from a compact, fast-acquisition optic
- Rugged construction withstands recoil, abuse and all types of weather
- Includes lens covers to protect from dirt and debris

RETICLES









Red, green, or reverts to black when battery is off.

Burris FAST FIRE

Instant dot-on-target accuracy for any firearm from handgun to shotgun, any sport from 3-Gun to wing shooting, any use from patrol to plinking. Loads of reticle options, massive battery life and 4 different models make FastFire the most versatile red dot reflex you can mount.



















NEW FASTFIRE 4

ITEM NUMBERS: 300259

RETICLE: **MULTI-RETICLE**

- Toggle between four different reticles
- · Impact resistant housing
- Brighter aiming point with longer battery life
- Bigger sight window for faster target acquisition
- Removable weather shield stays attached when slide mounted.

FASTFIRE 3

ITEM NUMBERS:

DOT SIZE: 3 MOA

ITEM NUMBERS: 300236

DOT SIZE: 8 MOA

- Automatic brightness sensor adjusts brightness to match the environmental conditions; also has 3 manual brightness settings
- Battery access is conveniently located on the top of the sight; automatic time-out feature after 8 hours helps battery last up to 5 years
- Available with Picatinny/Weaver mount for mounting on rifles, handguns and tactical





FASTFIRE 2

ITEM NUMBERS: 300232

DOT SIZE: 4 MOA

- Automatic brightness sensor adjusts brightness to match the environmental conditions
- Available with Picatinny/Weaver mount for mounting on rifles, handguns and tactical shotguns
- Black hood, when installed, puts unit into sleep mode











AR-F3™

ITEM NUMBER: 300215

DOT SIZE: 3 MOA

ITEM NUMBER: 410348 MOUNT ONLY

- Product includes AR-F3 tactical mount and 3-MOA FastFire 3 red dot sight
- Positions the FastFire at the optimum height on an AR as a standalone sight and as a co-witness for iron sights
- · Sight is protected by metal wings on each side
- Has convenient storage space for spare battery, open-end wrench, and Torx® wrench
- Fits any Weaver or Picatinny-style base

MOUNTS

Item	Mount
410321	1911 Standard
410322	1911 Adjustable/Novak
410323	Kimber® Standard/Target/Bomar
410324	Beretta® 92 & 96/90Two/Cougar/Taurus PT99
410319	Glock 45 ACP & 10mm, + PX4 Storm
410327	Sig Sauer® P226
410328	Springfield XD®
410336	Smith & Wesson® M&P®
410318	Ruger American Pistol
410329	Ruger® Mark I, II, III
410332	Ruger® M77, No. 1, Super Redhawk, Super Blackhawk Hunter
410333	Marlin® 336, 444, 1895 (Pre-drilled and tapped)
410334	Winchester® M94 (Pre-drilled and tapped)
410335	Picatinny/Weaver
410635	Sako® Rifles (Requires Picatinny Mount # 410335)

NEW FASTFIRE RD

ITEM NUMBERS: 300260

2 MOA

- FastFire RD (Rifle Dot) features a 2 MOA red dot
- Brighter dot with longer battery life
- Fits Weaver-style/Picatinny rails
- · Rugged alloy housing is impact resistant



PICATINNY PROTECTOR MOUNT

ITEM NUMBER: 410330

• Protects FastFire I, II, and III from impact or abuse

• Use when mounting a FastFire on pistols, rifles or shotguns, for extra protection and peace of mind

• Fits Weaver or Picatinny-style base

SERIES FEATURES

- Bright red dot allows for fast target acquisition and easy aiming
- 1x magnification allows for both-eyes-open shooting, for enhanced awareness and target acquisition
- Parallax-free, for better accuracy
- Mounts to almost anything—including handguns, rifles and shotguns—and the shockproof design stands up to years of punishing recoil
- Windage and elevation adjustments make fine-tuning easy

RED DOT







4 MOA Dot



8 MOA Dot









3 MOA 11 MOA

11 MOA and Circle Circle & Wings





RINGS, MOUNTS, RETICLES
AND ACCESSORIES

SOLID FOUNDATION FOR SUCCESS

Burris has built a reputation for some of the most solid, reliable rings and bases on the market. Our quality rings, mounts and accessories create the perfect shooting solution. You'll stay on target round after round with gear from Burris.



Burris. RINGS & MOUNTS

Hunters and tactical shooters count on Burris mounting solutions, with a wide variety of options that securely mount a riflescope onto any Weaver or Picatinny-style rail. These rings and bases provide long-lasting holding power and durability for hunters, duty officers and competitive shooters.





AR-P.E.P.R. Quick-Detach Model

AR-P.E.P.R.™ MOUNTS

- Full ring and base mounting solution in one
- Allows up to 2 inches of forward scope positioning
- Provides optimum eye relief and full field of view
- Includes both smooth and Picatinny ring tops
- Quick-detach models allow for fast mounting


В		10
	000 E	000
A C	000	0 0 0

			Dimensions	-ines					
Item	Size	Weight	A	B	С	/ D	E	QD MOUNT	CANT
410341	30 mm	8.7 oz.	1.00 in.	1.75 in.	1.60 in.	4.15 in.	2.15 in.	1553	0 MOA
410342	30 mm	8.7 oz.	1.00 in.	1.75 in.	1.60 in.	4.15 in.	2.15 in.	2 //	0 MOA
410343	1 in.	8.3 oz.	1.00 in.	1.57 in.	1.50 in.	4.15 in.	2.15 in.	1	0 MOA
410344	1 in.	8.3 oz.	1.00 in.	1.57 in.	1.50 in.	4.15 in.	2.15 in.	100	0 MOA
410345	34 mm	6.9 oz.	0.68 in.	1.90 in.	1.35 in.	4.90 in.	2.90 in.	100	20 MOA

AR-SIGNATURE QD™ P.E.P.R.™ MOUNTS

 The new streamlined design with QD mount insures ½ MOA re-mount capability and allows for use of back up iron sights while maintaining proper eye-relief. Available in 30-, 34- and 35-mm options with Burris' Signature polymer ring inserts, it provides adjustment from 5 to 40 MOA without using windage/elevation knobs.



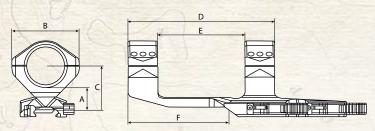

			Dimensions						
Item	Size	Weight	A	В	С	D	E	F	QD MOUNT
410352	30 mm	10.33 oz.	.81 in.	2.13 in.	1.5 in.	5.0 in.	3.0 in.	3.45 in.	
410353	34 mm	10.09 oz.	.76 in.	2.28 in.	1.5 in.	5.0 in.	3.0 in.	3.45 in.	19.
410354	35 mm	10.09 oz.	.76 in.	2.28 in.	1.5 in.	5.0 in.	3.0 in.	3.45 in.	19/1



XTR RINGS™

- 1 in. and 30 mm models are lightweight aluminum with incredible holding power
- Quick-detach models allow fast mounting

Item	Size	Quick-Detach	Aluminum	Steel	1 Ring	2-Ring Set
Low						
420160	30 mm					
420161	30 mm		•		-	
420180	1 in.		•			•
Medium						
420162	30 mm					
420163	30 mm					
420181	1 in.					•
High						
420164	30 mm		•			•
420165	30 mm		•			
420182	1 in.					
Extra-High						
420166	30 mm		-			
420167	30 mm				•	
420183	1 in.					•



Low



Extra-High



Picatinny Ring Top

XTR SIGNATURE RINGS™

Low

High

- Provide precision customization of cant to maximize usable elevation adjustment of the scope.
 Included inserts allow for 5, 10, 15, 20, 25, 30 and 40 MOA of cant
- Provide 100% scope-to-ring contact, eliminating the need to lap rings while providing tremendous gripping power without leaving ring marks
- Strong, lightweight aluminum rings feature solid steel dual screw clamps that insure each ring mounts flat and centered on any Picatinny base
- Includes the following Pos-Align® Offset Inserts: Concentric (Zero MOA), +/-5 MOA, +/-10 MOA, and +/-20 MOA (2 sets)

RING HEIGHTS

These are the dimensions of XTR Signature Rings, from the center of the scope to the top of the mount base.

Item	Height	Size	Item	Height	Size
420210	1.00 in.	34 mm	420223	1.50 in.	30 mm
420211	1.50 in.	34 mm	420231	1.00 in.	1 in.
420221	1.00 in.	30 mm	420232	1.25 in.	1 in.
420222	1.25 in.	30 mm	420233	1.50 in.	1 in.



Pos-Align® Offset Inserts

51

BURRIS OPTICS


RING HEIGHTS

420169

These are the dimensions of Xtreme Tactical Rings, from the center of the scope to the top of the mount base.

Picatinny Ring Top - allows attachment of accessories on top of mounted scope

	Low	Medium	High	Extra-High
30 mm	0.85 in.	1.10 in.	1.35 in.	1.60 in.
1 in.	0.75 in.	1.00 in.	1.25 in.	1.50 in.



1/2-INCH PICATINNY RISER

 Provides 1/2 inch of additional mounting height for optimal sight alignment on tactical platforms

Item	Height
410340	0.5 in.





SIGNATURE RINGS

- Revolutionary Pos-Align® Inserts technology
- Pos-Align Inserts guarantee perfect centering and maximum scope-to-ring contact for tremendous gripping power without damaging the scope finish
- Lets you virtually sight in your gun without moving the scope adjustments
- Corrects misalignment caused by off-center receiver holes
- Corrects for bases or rings being slightly off-center
- No need for expensive tapered bases or shimming for thousand-yard shooting
- · Solid steel rings are ideal for hunting













Signature Universal Dovetail Rings

			1				
Item	Size	Height	Finish				
Signature Universal Dovetail							
420501	1 in.	Medium	Matte				
420511	1 in.	High	Matte				
420578°	30 mm	Medium	Matte				
420581*	30 mm	High	Matte				
420582*	30 mm	Extra-High	Matte				
Signature Double Dovetail							
420561	1 in.	Medium	Matte				

Signature Zee Rings

Item	Size	Height	Finish
Signature Zee	Rings (Wed	ver-Style)	7-5
420520	1 in.	Medium	Black Gloss
420521	1 in.	Medium	Matte
420522	1 in.	Medium	Nickel
420530	1 in.	High	Black Gloss
420531	1 in.	High	Matte
420532	1 in.	High	Nickel
420585*	30 mm	Extra-High	Matte
420587*	30 mm	High	Matte
420588*	30 mm	Medium	Matte

Signature Rimfire/Airgun Rings

İtem	Size	Height	Finish	100	
Signature R	timfire/Airgu	1			
420554	1 in.	Medium	Matte		
420556	1 in.	High	Matte		


Comes with clamps for 11 mm and 3/8" dovetails

Pos-Align® Offset Inserts

Signature	Pos-Align®	Offset	Inserts

msidilano	II KII
626019	1 each of +/005, +/010, +/020
Gunsmith	Kit
626024	10 each of 1/2 005 1/2 010 1/2 020

626017 +/-.010 Eccentric Offset +/-.020 Eccentric Offset







- For use with Zee Rings
- Mounts optics onto Ruger[®] firearms that feature the proprietary Ruger[®] integral mounting system

Item	Compatible with Ruger® Firearm
410990	M77®, Super Redhawk®
410991	No. 1,77/22®,77ML®,77/44®,Mini-14®,Redhawk®
410992	M77® for use with Eliminator® LaserScope®



• Machined to exacting tolerances to handle recoil or abuse



Item	Size	Height	Finish	Quick-Detach
Weaver-Style				
420031	1 in.	Low	Matte	•
420034	1 in.	Medium	Matte	
420037	1 in.	High	Matte	•
420044	30 mm	Medium	Matte	
420077	30 mm	High	Matte	
420079	1 in.	Low	Nickel	
420080	1 in.	Low	Black Gloss	
420081	1 in.	Medium	Black Gloss	
420082	1 in.	High	Black Gloss	
420083	1 in.	Low	Matte	
420084	1 in.	Medium	Matte	
420085	1 in.	Medium	Nickel	
420086	1 in.	High	Nickel	
420087	1 in.	High	Matte	

RIMFIRE/AIRGUN RINGS

 Available in solid
steel or aluminum

 Securely mount your rimfire or airgun optic

Item	Size	Height	Finish	Material	Quick-Detach
.22 Ring Po	irs (fits in :	22-in. groov	ved receivers)		
420069	1 in.	Medium	Matte	Steel	
420072	1 in.	Medium	Black Gloss	Steel	
420073	1 in.	High	Black Gloss	Steel	
420076	1 in.	High	Matte	Steel	
420068	1 in.	Medium	Matte	Steel	





CZ-STYLE RINGS

 Solid steel
 Designed for mounting optics on CZ rifles

Item	Size	Height	Finish	Action
CZ 550				
420130	1 in.	Medium	Matte	Long-Action
CZ 527				
420140	1 in.	Medium	Matte	Short-Action



53 BURRIS OPTICS 2020

TIKKA® T3® RINGS


- Solid steel
- Ring and base solution specifically designed for Tikka® T3® rifle

Item	Size	Height	Finish	
Tikka T3 Ri	ngs			
420135	1 in.	Medium	Matte	
420136	30 mm	Medium	Matte	
420137	30 mm	High	Matte	



RING HEIGHTS

Ring Heights	Low	Medium	High	Extra-High
Signature 1 In.		0.77	0.89	
Standard 30 mm & Signature 30 mm		0.78	0.89	1.02
Zee 1 In. & Quick-Detach 1 In.	0.63	0.76	0.95	
Zee Signature 1 In.		0.77	0.92	
Zee 30 mm & Zee Signature 30 mm		0.81	0.93	1.18
CZ (All)		1.00		
.22 Signature Deluxe		0.90	1.29	
1-In22 Rings (All)		0.80	0.95	
Tikka T3		1.125	1.250	



Dimensions listed are from the center line of the scope tube to the bottom of the ring.

XTREME TACTICAL™ 2-PIECE BASES

- Solid steel bases work with all Weaver-style, Picatinny-style, and mil-spec rings
- Engineered with minimal height and weight
- Mil-spec cross slots guarantee rock-solid attachment
- Matte finish

	44/34	
Item	Style	Reversible Front Base
410600	XTB-700/7 (Remington® 700 & 7 Short & Long)	
410605	XTB-70/Express (Winchester® 70 Short, Long & Express)	W • 4
410606	XTB-70 WSS (Winchester® 70 Short, Long & SXR)	•
410615	XTB-SavR (Savage® Short & Long Round Rear)	-
410620	XTB-SavF (Savage® Short & Long Flat Rear)	
410625	XTB-ABOLT (Browning® A-Bolt Short & Long)	13/3
410630	XTB-TIKKA® (Tikka®)	1
410635	XTB-SAKO® Dovetail (SAKO® Dovetail Steel Base Low Profile)	~~



The new Xtreme Tactical one-piece bases offer the perfect mounting solution for precision shooters. In addition to greater strength and rigidity, the 25 MOA cant offers extended range capability.

- Milled from a single piece of solid steel
- Compatible with all Weaver-style, Picatinny-style rings
- Designed to work with both short and long actions
- Matte finish

	25 11 11	
Item	Style	MOA Cant
410650	XTB-Sav Round Rear Long	25
410651	XTB-Sav Round Rear Short	25
410652	XTB-700 Long Action - Howa 1500 Long Action	25
410653	XTB-700 Short Action	25
410655	XTB-Howa 1500 Short Action	25
410658	XTB-TIKKA® (Tikka®)	25
410660	XTB-Sav Round Rear Long	No Cant
410661	XTB-Sav Round Rear Short	No Cant
410662	XTB-700 Long Action - Howa 1500 Long Action	No Cant
410663	XTB-700 Short Action	No Cant
410665	XTB-Howa 1500 Short Action	No Cant
410668	XTB-TIKKA® (Tikka®)	No Cant





BurrisRETICLES

Reticles take the guesswork out of target size and distance, wind hold-off, and holdover. There's a quality Burris reticle with features for every shooting challenge.

THE RIGHT FOCAL PLANE FOR THE SHOT

FRONT FOCAL PLANE

Front focal plane (FFP) reticle design, also called first focal plane, places the reticle in front of the zoom mechanism, allowing the reticle size to increase or decrease as magnification is increased or decreased.

Trajectory compensation and reticle measurements are always correct and proportional for the selected power setting.


REAR FOCAL PLANE

Rear focal plane (RFP) reticle design, also called second focal plane, places the reticle behind the zoom mechanism so the reticle size stays constant at every magnification.

Trajectory compensation and reticle measurements will only be correct at one magnification setting (normally high power).



FFP LOW-POWER VIEW




FFP HIGH-POWER VIEW



RFP LOW-POWER VIEW




RFP HIGH-POWER VIEW



PLEX


- Simple reticle
- Thin crosshair with bolded edges is highly visible
- Lets you zero in on animals of nearly any size

DETAIL



	LC	W MA	G	HI	GH M	AG
Model	Α	В	w	A	В	w
Fullfield II™						
3-9x40	.86	2.3	26	.31	.83	9.40
Handgun						
2x-20	.81	2.2	25			
2-7x32	.90	2.5	28	.27	.72	8.20
Scout™ (Heavy Plex Reticle)						
2-75x20mm	.70	3.4	22			






FINE PLEX™

- Clean design for easier target acquisitionThinner posts and crosshairs
- Preferred reticle for precision shooting

DETAIL



RETICLE SUBTENSIONS (in MOA)

Magnification	A	В	С
24x	.80	.20	10.00
25x	.08	.20	10.00


RFP

FOCAL PLANE EAR

C4 WIND MOA™


- Clean, simple reticle works perfectly with custom elevation knob and WindMap™ on the AR Riflescope platform
 1 MOA tick marks allow easy compensation for wind drift

DETAIL



RETICLE SUBTENSIONS (@ High Mag)


Units	А	В	С	D
4.5-14x42				
MOA	.18	.50	.50	1.0

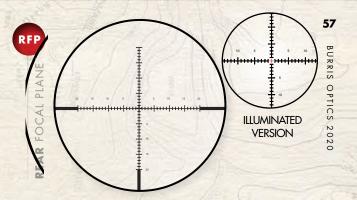

LONG-RANGE MOA

- Increases precision for long-range competitionUltra-fine center area helps shooters engage targets with extreme accuracy
- MOA-based, proprietary Burris design increases detail for long-range competition without adding clutter or distraction
- Design increases speed and precision for wind hold-off, range estimation and impact measurement


DETAIL



Model	А	В	С	D	E	F	G	Н
4.5-14x42	30	1	1	5	.13	.2	-1	2

PLANE


AR FOCAL



BALLISTIC MIL-DOT

- Ideal for very flat-shooting cartridges
- Perfect choice for long-range target shooters, varmint shooters, and tactical marksmen
- Mil-dots can be used for estimating range and target size, and help compensate for wind drift

DETAIL



RETICLE SUBTENSIONS (in Mils; @ 20x)


Model	А	В	w 1
6.5-20×50	.05	.78	10



BALLISTIC PLEX™

- The most simple, effective and elegant trajectorycompensating reticle
- · Quick and easy to use
- Can be matched to any caliber or bullet weight for longrange accuracy

DETAIL




RETICLE SUBTENSIONS (in MOA)

		LC	W MA	G	н	HIGH MAG					
	Model	A	В	w	A	В	w				
	2-7x35	1.1	3.0	26	.39	1.06	9.1				
	3-9x40	.86	2.3	20	.31	.83	7.1				
	3-9x-50	.82	2.2	19	.29	.79	6.8				
9	4.5-14x-42	.58	1.6	19	.19	.52	6.2				

REAR FOCAL PLANE


BALLISTIC PLEX E1

- Trajectory-compensating technology and cascading dots for compensating wind drift with nearly any biggame hunting cartridge
- Dots represent hold-off for a 10 mph wind
- Simple, accurate and easy to use



		LC	ow M	HIGH MAG						
	Model	А	В	W	Α	В	w			
:	2-7x35	1,1	3.0	26	.39	1.06	9.1			
5	3-9×40	.86	2.3	20	.31	.83	7.1			
1	3-9x50	.82	2.2	19	.29	.79	6.8			
	4.5-14x42	.58	1.6	19	.19	.52	6.2			






BALLISTIC PLEX E1™ MV


- Trajectory-compensating technology and cascading dots for compensating wind drift
- Dots represent hold-off for a 10 mph wind
- At 20x power setting, it's calibrated for the .22-250 cartridge; also works well with other flat-shooting cartridges
- Mil measurement tools aid in calculating distance and target size

DETAIL



RETICLE SUBTENSIONS (in Mils)

Model	А	В	С	D	E	F	G	Н
6.5-20x50	.125	.03	5	.25	.5	1.5	2.5	.25





59


BURRIS OPTICS 2020

BALLISTIC PLEX E1™ FFP

2-10x/3-15x


- MOA reticle
- Trajectory compensation out to 600 yards
- Cascading dots represent a 10 mph wind hold-off
- Bold, tapered crosshairs in an FFP design make the reticle highly usable, ensuring its visibility even on low power

DETAIL



RETICLE SUBTENSIONS (in MOA)


Model	Α	В	С	D	Е	F	G	Н
2-10x42	20	.75	.3	2	4	4	2	.3
3-15-50	20	5	2	2	1	1	2	3



RETICLE SUBTENSIONS RFP (in MOA)

4-20x/5-25x


Model	А	В	С	D	E	F	G	Н	1	J	К
4-20x50	.38	13	4	1	1	.5	.15	2	.8	1.2	.38
5-25x50	35	13	4	1	1	5	13	2	8	12	35



BALLISTIC PLEX E1™ FFP VARMINT


- Precision varmint reticle
- MOA tick marks for measuring distance and determining target size
- Trajectory compensation out to 700 yards
- Cascading dots represent a 10 mph wind hold-off
 Bold crosshairs in an FFP design make the reticle highly usable, ensuring its visibility even on low power

DETAIL



RETICLE SUBTENSIONS (in MOA)

Model	Α	В	С	D	Е	F	G	Н	1	7	K
4-20×50	2	40	2	.38	1	4	.13	2	4	.23	.13
5-25x50	2	40	2	.30	1	4	.11	2	4	.18	.11




SCR™ MOA

2-10x/3-15x


4-20x/5-25x/5.5-30x/3.3-18x

• Burris offers an MOA-based version of the SCR reticle with the same features as the SCR Mil.

DETAIL




DETAIL




RETICLE SUBTENSIONS (in MOA)

Model	Α	В	C	D	E	F	G	Н	-1	1	K	L	М	N	0
2-10x / 3-15x	2	1	.17	.5	Y	.5	1	-	1	1.5	2	3	.1	.15	.5

Model	Α	В	С	D	E	F	G	Н	1	J	K	L	М	N	0
4-20x / 5-25x	2	1	.12	.5	1	.25	.5	.7	1	1.5	2	3	.07	.11	.35
5.5-30x	2	1	.12	.5	1	.25	.5	.7	1	1.5	2	3	.07	.11	35
3.3-18x	2	1	.17	.5	1	.25	.5	.7	1	1.5	2	3	.10	.14	35





- Mil-based, proprietary Burris design
- Increases precision for long-range competition, without adding clutter or distraction
- Extended center illuminated area (select models only) lets the shooter confidently engage targets at long distances in low light and shadows
- Increases speed and precision for wind hold-off and for range estimation and impact measurement



RETICLE SUBTENSIONS

Unit	Α	В	С	D	Е	F	G	Н	1	J	K	L	М	N	0
4-20x5	0 and	d 5-2	5×50												
Mils	1.00	.50	.035	.10	.25	.10	.08	2.00	.20	.40	.60	.80	.02	.03	.125
CM	10	5	.35	1	2.5	1	.8	20	2	4	6	8	.2	.3	1.25
in./100yd.	3.60	1.80	.13	.36	.90	.36	.29	7.20	.72	1.44	2.16	2.88	.07	.11	.45
MOA	3.44	1.72	.12	.34	.86	.34	.28	6.88	.69	1.38	2.06	2.75	.07	.10	.43
3-15x5	0	7													
Mils	1.00	.50	.05	.10	.25	.12	.08	2.00	.20	.40	.60	.80	.02	.04	.125
CM	10	5	.5	1	2.5	1.25	.8	20	2	4	6	8	.4	.4	1.25
in./100yd.	3.60	1.80	.18	.36	.90	.45	.29	7.20	.72	1.44	2.16	2.88	.07	.14	.45
MOA	3.44	1.72	.17	.34	.86	.43	.28	6.88	.69	1.38	2.06	2.75	.07	.14	.43







The SCR 2[™] reticle provides a customer-requested "tree" style reticle. Developed and tested by champion shooters, the
 SCR 2 reticle provides outstanding information for shot tracking and repaired.

SCR 2 reticle provides outstanding information for shot tracking and ranging.


• The SCR 2 was designed to give precision shooters everything they need in a reticle while staying sufficiently unobtrusive when it is not needed. As a MRAD-based design with 0.2 MRAD graduations, it is compatible with all calibers.

DETAIL





UNIT	Α	В	С	D	Е	F	G	Н	1	J	К
	.02	.03	.05	.1	.15	.2	.4	.6	1.0	2.0	5.0




FOREVER WARRANTY

NO OUESTIONS ASKED *

WHITE STATEMENT






F-CLASS MOA

- Optimized for long-range F-Class competitive shooting
- Laid out in 0.5 MOA increments
- A secondary horizontal crosshair gives the shooter 20 MOA of additional adjustment, with the MOA hash marks for wind hold-off still visible
- Illuminated center dot at the 0, 10, 20, and 30 MOA marks

DETAIL




RETICLE SUBTENSIONS (in MOA)

Model	А	В	С	D	Е	F	G	н
8-40×50	1	1	.5	15	.5	2	0.5	.02




G2B MIL-DOT™

- Mil-based reticle with hash marks between the mil dots for more precise aiming, distance measurement, holdover and hold-off for wind
- Excellent in tactical situations when determining target distance and size is critical




RETICLE SUBTENSIONS

					3(3)						
Units	A	В	С	D	E	F	G	Н	J	K	L
Mils	10	.5	.5	.2	.05	.5	1	.05	.05	5	2
in./100 yd.	36	1.8	1.8	7.72	.18	.18	3.6	.18	.18	18	7.2
Models	1	75	1	38/	1/2		1		100		
Droptine	4.5-1	4×42 (R	ear Foo	al Plane)							
XTR II	2-10×	42, 3-1	5x50, 4	1-20×50	5-25x5	50					



BALLISTIC CQ™

- Designed for competitive shooting, law enforcement and military applications
- Circular center provides ultra-fast engagement at close distances
- Dots provide trajectory compensation out to 600 yards for popular 5.56 and 7.62




RETICLE SUBTENSIONS (in Mils)

Units	Α	В	С	D	E	F	G	Н
Mils	5	.75	.2	.66	.33	.25	.2	.55
Models		S Ide		1000				
Prism	AR-3	32, AR-55	56					
MTAC*	1-4x2	24, 1.5x6	×42					

*Calibrations for high power


BURRIS OPTICS 2020



BALLISTIC 3X™


- Stadia lines and center horseshoe are optimized for viewing at 3x magnification
- Fine aiming lines for elevation and windage adjustment, precise shot placement at distance
- Proven broken circle design with center dot for ultra-fast engagement at short distances
- Center illumination is daylight bright and won't wash out in harsh light

DETAIL



RETICLE SUBTENSIONS (in Mils)


Model	А	В	С	D	E	F	G
AR-332	1	.50	.175	.125	.1	1.25	10
RT-3	1	.50	.175	.125	.1	1.25	10



BALLISTIC AR™

- Versatile tactical reticle with milradian meaurements
- Illuminated broken circle with center dot allows for ultra-fast engagement at short distances
- Trajectory compensation out to 600 yards
- Ideal for achieving long-range accuracy with 5.56 and .223 ammunition

DETAIL



RETICLE SUBTENSIONS (in Mils)

Models Prism AR-536	Units	A	В	С	D	E	F	G
Prism AR-536	Mils	10	1	.5	.125	.75	1.25	.175
Prism AR-536	Models	- Silver						
		AR-536						
7111110			-5×42					
RT-6 1-6x24			012					

F-CLASS DCH


- Designed purposefully to assist F-Class and other long range shooters in executing the highest level of accuracy possible
- The ultrafine center .02 MOA crosshairs are enhanced for contrast by the .125MOA center dot

DETAIL

RFP

FOCAL PLANE

REAR



			1		
Mo	del	A	В	С	D
8-4	40x50	.5	.125	.03	.02






BALLISTIC E2

- The Ballistic E2 is a rear focal plane reticle calibrated for traditional, magnum and varmint loads
- Hash marks on lower vertical crosshair are calibrated for dead-on aiming from 100 to 600 yards and cascading dots help you quickly and easily adjust for a 10-m.p.h. crosswind


DETAIL



All Subtensions in MOA at 15X magnification. When modifying for 10X, leave all actual reticle dimensions the same except the Trajectory bar and wind spacing which must maintain it's MOA values as shown at 15X


RETICLE SUBTENSIONS (in MOA)

Model	A	В	С	D	E	F	
2-10x42	.170	.120	.230	.45	.50	1.00	
3-16x50	.170	.120	.230	.45	.50	1.00	




E3™ MOA

- Rear focal plane reticle calibrated for traditional, magnum and varmint loads
- Hash marks on lower vertical crosshair are calibrated for aiming from 100 to 400 yards
- Cascading dots help adjust for a 10-m.p.h. crosswind
 2 MOA hash marks on horizontal crosshair make holding for wind easier




		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		1000
- 1/1	A	В	c	D
10x	.30	.20	1.0	6
12x	.25	.16	1.0	6
15x	.20	.13	.5	6
16x	.19	.12	.5	6
24x	.12	.08	.5	6
25x	.12	.08	.5	6
The State of the S				




6.5 CREEDMOOR

- Calibrated for the popular 140 gr bullet
- Rear Focal Plane MOA reticle
- Hash marks on lower vertical crosshair are calibrated for dead-on aiming from 100 to 600 yard. .Cascading dots help you quickly and easily adjust for a 10-m.p.h. crosswind




UNITS	Α	В	С	D
4-16x	.11	1.0	.5	.23
5-25x	.11-	1.0	.5	.23



C-4 WIND MOA


- Clean, simple reticle with 1-MOA tick marks extending to 10 MOA on each side
- Works seamlessly with custom elevation knob and WindMap™
- WindMap tells how many MOA tick marks to hold into the wind to compensate for a 10-m.p.h. wind at 100-yd. increments

DETAIL



RETICLE SUBTENSIONS (in MOA)


Magnification	Α	В	С	D
12x	.18	.13	1	.5



FASTFIRE 4 MULTI-RETICLES

- Toggle through four reticles for optimal accuracy and target acquisition from close to far
- 2.75 MOA dot
- 11 MOA dot
- 11 MOA dot with a circle

DETAIL



MATCH YOUR EXACT BALLISTICS TO YOUR BURRIS RETICLE

Burris makes it easy to match your environment, cartridge, gun and scope to provide the exact reticle data you need. Whether



you dial in a solution, or prefer an exact holdover, this tool will calculate it for you. Learn precisely where your shot will fall at any distance.

The Burris Ballistic Services offers a newly updated set of sophisticated online ballistic tools that will allow you to:

- Build & true a dope card
- Program your Eliminator riflescope
- Order custom elevation and windage knobs
- Analyze your Burris reticle

With our easy-to-use software, expansive cartridge and bullet libraries, and highly customizable results, the Burris Ballistic Services will turn you into a reticle expert and a pro on the shooting range.

These tool were developed with the serious shooter in mind, but it's also a great way for any novice to learn more about long range shooting.

And with the ballistic calculator adding in environmental factors, it's not just quicker: it's far more accurate than ever before.

burrisoptics.com/ballistics





70 HUNTING SPECIFICATIONS





Eliminator®	LaserSco	pe® Series
-------------	----------	------------

		oropo .	01103				_		-	_												
Item	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Laser Range (Environmental conditions may limit range)	Operating Temperature	Reticle	Illumination	Focal Plane	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight [†]	Battery	Mounting Rail Length	Remote Cable Switch
4-16	k50mm									1												
20011	6 4-16x	65 mm	50 mm	42 mm	750 yds. (non-reflective) – 1200+ yds. (reflective)	-15°F – +122°F	X96		RFP	Matte	26 - 7 ft.	3.5 – 4 in.	12.5-3.1 mm	1/8 MOA	40 MOA	40 MOA	50y to ∞	15.5 in.	30.4 oz.	CR123A	8.5 in.	No
20013	3 4-16x	65 mm	50 mm	42 mm	2000 yds on deer hide	15°F - 122°F	X96		RFP	Matte	33 - 9 ft	3.5 - 4 in	16 - 4.2 mm	1/8 MOA	50 MOA	50 MOA	30y - ∞	13.5 in	28.8 oz	2×AAA	8.5 in.	Bluetooth

*Example: 50 MOA is roughly 25 MOA in any direction from center *Weight includes mount and battery

Veracity™ Riflescopes Series


*Example: 50 MOA is roughly 25 MOA in any direction from center



Ballistic E2™ RFP	Ballistic Plex E1™ FFP	Ballistic Plex E1™ FFP Varmint	SCR™ MOA
Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus Length	Weight

	200						PAY											
Item	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Knob Style – Elevation & Windage*	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight
2-10x42	mm			135					1			1	10					
200621	2-10x	49.5 mm	42 mm	44.25 mm	Ballistic Plex E1™ FFP	FFP	30 mm	Matte	52 - 10.5 ft.	3.50 – 4.25 in.	31 – 4.2 mm	1/4 MOA	MAD/LC	70 MOA	40 MOA	50y to ∞	13.5 in.	22.7 oz.
200622	2-10x	49.5 mm	42 mm	44.25 mm	Ballistic E2™ RFP	RFP	30 mm	Matte	52 - 10.5 ft.	3.50 – 4.25 in.	31 – 4.2 mm	1/4 MOA	MAD/LC	70 MOA	40 MOA	50y to ∞	13.5 in.	22.7 oz.
3-15x50	mm											MITS.						
200636	3-15x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP	FFP	30 mm	Matte	36 - 7.5 ft.	3.50 – 4.25 in.	16 – 3.3 mm	1/4 MOA	MAD/LC	70 MOA	40 MOA	50y to ∞	14.1 in.	25.2 oz.
200638	3-15x	58 mm	50 mm	44.25 mm	Ballistic E2™ RFP	RFP	30 mm	Matte	36 - 7.5 ft.	3.50 – 4.25 in.	16 – 3.3 mm	1/4 MOA	MAD/LC	70 MOA	40 MOA	50y to ∞	14.1 in.	25.2 oz.
4-20×50	mm																	
200640	4-20x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP Varmint	FFP	30 mm	Matte	26 - 5.5 ft.	3.50 – 4.25 in.	12 – 2.5 mm	1/4 MOA	TC/Z	70 MOA	40 MOA	50y to ∞	15.0 in.	27.2 oz.
200641	4-20x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP	FFP	30 mm	Matte	26 - 5.5 ft.	3.50 – 4.25 in.	12 – 2.5 mm	1/4 MOA	MAD/LC/Z	70 MOA	40 MOA	50y to ∞	15.0 in.	27.2 oz.
5-25×50	mm																	
200650	5-25x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP Varmint	FFP	30 mm	Matte	21 - 4.3 ft.	3.50 – 4.25 in.	10 – 2.0 mm	1/4 MOA	TC/Z	64 MOA	30 MOA	50y to ∞	16.4 in.	28.2 oz.
200651	5-25x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP	FFP	30 mm	Matte	21 - 4.3 ft.	3.50 – 4.25 in.	10 – 2.0 mm	1/4 MOA	MAD/LC/Z	64 MOA	30 MOA	50y to ∞	16.4 in.	28.2 oz.
200652	5-25x	58 mm	50 mm	44.25 mm	SCR MOA	FFP	30 mm	Matte	21 - 4.3 ft.	3.50 – 4.25 in.	10 - 2.0 mm	1/4 MOA	MAD/LC/Z	64 MOA	30 MOA	50y to ∞	16.4 in.	28.2 oz.

*Knob Style Codes MAD = M.A.D. System, single turn LC = Low, Capped Knob LT - Low, Single-Turn Tactical Knob TC - Tall, Capped Knob TT - Tall, Multi-Turn Tactical Knob Z - Zero Click Stop E - Extra Low, Capped Knob (included in box)




					Control of the Contro												_
Fullfield	E1™ Rifles	copes Serie	S	only	1850										Ballistic P	Plex E1™	Ballistic Plex E1™ MV
Item	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight
3-9x40m	m						-70		2017								
200320	3-9x	48 mm	40 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Matte	33-13 ft.	3.1 – 3.4 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in	. 13.0 oz.
4.5-14x4	2mm			1 -iva			1	1	1/11								
200338	4.5-14x	51.5 mm	42 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Matte	22-7.5 ft.	3.1 – 3.8 in.	9-3 mm	1/4 MOA	40 MOA	40 MOA	Fixed - 100y	12.6 in	. 15.3 oz.
6.5-20x5	0mm				美			1									
200341	6.5-20x	63 mm	50 mm	39 mm	Ballistic Plex E1™ MV	RFP	1 in.	Matte	18-6 ft.	3.1 – 3.6 in.	7.6-2.5 mm	1/4 MOA	30 MOA	30 MOA	50y to ∞	14.0 in	. 16.9 oz.




Fullfield™	II	Riflesco	pes	Series
------------	----	----------	-----	--------

ltem	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight
3-9x40mn	n												E / /	111		1	
200162	3-9x	45.5 mm	40 mm	39 mm	Ballistic Plex™	RFP	1 in.	Matte	33-13 ft.	3.1 – 3.4 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in.	13.0 oz.
4.5-14x42	2mm																
200183	4.5-14x	56 mm	42 mm	39 mm	Ballistic Plex™	RFP	1 in.	Matte	22-7.5 ft.	3.1 – 3.8 in.	9-3 mm	1/4 MOA	40 MOA	40 MOA	Fixed - 100y	13.0 in.	18.0 oz.
6.5-20×50)mm																
200193	6.5-20x	63 mm	50 mm	39 mm	Ballistic Mil-Dot	RFP	1 in.	Matte	18-6 ft.	3.1-3.6 in.	7.6-2.5 mm	1/4 MOA	30 MOA	30 MOA	50y to ∞	14.5 in.	19.0 oz.



*Example: 50 MOA is roughly 25 MOA in any direction from center

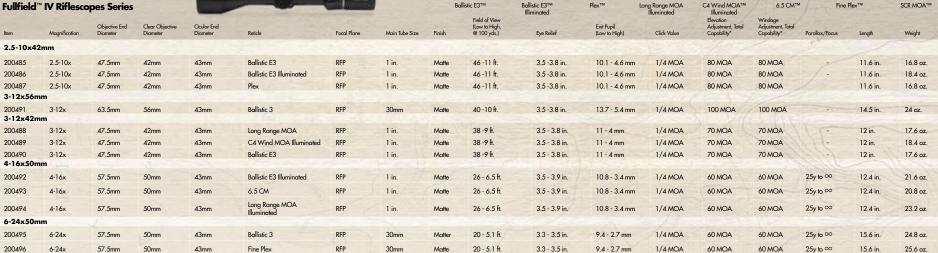

20 - 5.1 ft.

Matte

3.3 - 3.5 in.

9.4 - 2.7 mm

1/4 MOA

60 MOA

60 MOA

25y to ∞

15.6 in.

25.6 oz.

*Example: 50 MOA is roughly 25 MOA in any direction from center

57 5mm

50mm

6-24x

200497

Signature HD™ Riflescopes Series	

43mm

SCR MOA


RFP

30mm

Signatur	е но кітіе	scopes sen	es			_						Ballistic E3™	Ballistic E3™ Illiminated	Plex™		6.5 CM™ Illuminated	Fine Plex™
Item	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight
2-10x40m	ım 💮																
200530	2-10x	47.2mm	40mm	46mm	Ballistic E3	RFP	1 in.	Matte	54 - 10.8 ft.	3.5 - 3.8 in.	8 - 3.5 mm	1/4 MOA	120 MOA	120 MOA		11.7 in.	17.6 oz.
3-15x44m	ım																
200531	3-15x	51.2mm	44mm	46mm	Ballistic E3 Illuminated	RFP	1 in.	Matte	37.5 - 7.5 ft.	3.5 - 3.8 in.	8 - 3.3 mm	1/4 MOA	80 MOA	80 MOA	25y to ∞	13.2 in.	20.8 oz.
200532	3-15x	51.2mm	44mm	46mm	Plex	RFP	1 in.	Matte	37.5 - 7.5 ft.	3.5 - 3.8 in.	8 - 3.3 mm	1/4 MOA	AOM 08	80 MOA	25y to ∞	13.2 in.	20 oz.
5-25x50m	ım												位 1000				
200533	5-25x	57.2mm	50mm	46mm	Ballistic E3 Illuminated	RFP	30mm	Matte	22.5 - 4.5 ft.	3.3 - 3.6 in.	8 - 2.2 mm	1/4 MOA	65 MOA	65 MOA	25y to ∞	14.3 in.	24 oz.
200534	5-25x	57.2mm	50mm	46mm	Fine Plex	RFP	30mm	Matte	22.5 - 4.5 ft.	3.3 - 3.6 in.	8 - 2.2 mm	1/4 MOA	65 MOA	65 MOA	25y to ∞	14.3 in.	23.2 oz.
200535	5-25x	57.2mm	50mm	46mm	6.5 CM Illuminated	FFP	30mm	Matte	22.5 - 4.5 ft.	3.3 - 3.6 in.	8 - 2.2 mm	1/4 MOA	65 MOA	65 MOA	25y to ∞	14.3 in.	24 oz.

*Example: 50 MOA is roughly 25 MOA in any direction from center

72 HUNTING SPECIFICATIONS



Scout R	iflescopes	Series
---------	------------	--------

COUI KI	nescopes 3	ici ics		
ltem	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter
2-7x32mr	n			
200261	2-7x	39 mm	32 mm	38 mm
2.75×20m	ım			
200269	2.75x	27 mm	20 mm	35 mm
Evample: 50 M	OA is roughly 25 MO/	in any direction from a	ontor	

			100000		1	1) 2			Heavy	Plex B	Sallistic Plex***
Reticle	Focal Plane	Main Tube Size	Finish	Field of View (@ 100 yds.)	Eye Relief	Exit Pupil	Click Value (@ 100 yds.)	Elevation Adjustment, Total Capability (@ 100 yds.)*	Windage Adjustment, Total Capability (@ 100 yds.)*	Length	Weight
Ballistic Plex™	RFP	1 in.	Matte	23 ft. low - 8 ft. high	9.2–12 in.	16 mm low-4.6 mm high	1/4 in.	66 in.	66 in.	9.7 in.	13.0 oz.
Heavy Plex	RFP	1 in.	Matte	15 ft.	7.3 in.	7.3 mm	1/2 in.	140 in.	140 in.	9.2 in.	7.0 oz.

10 – 19 in. Low 10 – 12.5 in. High 11 – 2.7 mm 1/8 in.



8.9 in.

9.7 in.

10.8 in.



7.0 oz. 7.0 oz.

13.0 oz. 13.0 oz. 13.0 oz. 13.0 oz.

16.0 oz.

Handgun Scopes Serie

Item	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular Er Diameter					
2x20mm			2.02						
200218	2x	27 mm	20 mm	35 mm					
200229	2x	27 mm	20 mm	35 mm					
2-7x32mm									
200279	2-7×	39 mm 32 mm		38 mm					
200291	2-7x	39 mm	32 mm	38 mm					
200298	2-7×	39 mm	32 mm	38 mm					
200299	2-7x	39 mm	32 mm	38 mm					
3-12x32m	ım								
200309	3-12x	44 mm	32 mm	38 mm					


1	The second secon										
End r	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (@ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value (@ 100 yds.)	Elevation Adjustment, Total Capability (@ 100 yds.)*	Windage Adjustment, Total Capability (@ 100 yds.)*	Parallax/Focus
								10			
1	Plex	RFP	1 in.	Matte	21 ft.	10-24 in.	10 mm	1/2 in.	80 in.	80 in.	Fixed - 100y
1	Plex	RFP	1 in.	Nickel	21 ft.	10-24 in.	10 mm	1/2 in.	80 in.	80 in.	Fixed - 100y
6											
1	Ballistic Plex™	RFP	1 in.	Matte	21 ft. low -7 ft. high	11 – 21 in. Low 10 – 14 in. High	16-4.6 mm	1/4 in.	64 in.	64 in.	Fixed - 100y
1	Plex	RFP	1 in.	Matte	21 ft. low-7 ft. high	11 – 21 in. Low 10 – 14 in. High	16-4.6 mm	1/4 in.	64 in.	64 in.	Fixed - 100y
1	Plex	RFP	1 in.	Nickel	21 ft. low-7 ft. high	11 – 21 in. Low 10 – 14 in. High	16-4.6 mm	1/4 in.	64 in.	64 in.	Fixed - 100y
(Ballistic Plex [™] /Posi-Lock [™]	RFP	1 in.	Matte	21 ft. low-7 ft. high	11 – 21 in. Low 10 – 14 in. High	16-4.6 mm	1/4 in.	64 in.	64 in.	Fixed - 100y
)							

14 ft. low - 4 ft. high

*Evample	50 MOA is roughly	25 MOA in am	direction	from center

Spotting	Signature	HD®	Scope
----------	-----------	-----	-------

				HILL SECTION OF THE PARTY OF TH		Field of View				
Item	Magnification	Clear Objective Diameter	Reticle	Focal Plane	Finish	(Low to High, @ 1000 yds.)	Eye Relief	Focus	Length [†]	Weight
20-60×85	mm				- /- /-		1			
300102	20-60x	85 mm		RFP	Black/Flat Dark Earth	117-60 ft.	20-18 mm	Coarse / Fine	15.3 in.	67.2 oz.
30x Eyepi	ece									
626200	30x		1.	RFP	Black	112 ft.	18 mm	J 11/1/	2.1 in.	5 oz.
626201	30x	200	SCR™ MIL	RFP	Black	112 ft.	18 mm		2.1 in.	5 oz.
626202	30x		SCR™ MOA	RFP	Black	112 ft.	18 mm		2.1 in.	5 oz.



														11055	
FastFire	e™3 with Sp	eedBead™ Shotg	un Mount	U											8 MOA Do
Item	Magnification	Clear Objective Diameter	Reticle	Reticle Color	Illumination	Finish	Mount	Eye Relief	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight	Battery
Benelli Su	per Black Eagle	e II 12 Gauge								1000	1548-Y/V	37/4/4			
300240	1.07x	21x15 mm	8 MOA Dot	Red		Matte	Benelli Super Black Eagle II 12 Gauge	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.9 oz.	CR1632
Includes mo	unt and FastFire 3														
Benelli M	2, Montefeltro,	and Ultra Light 12 Go	ıuge												
300241	1.07x	21x15 mm	8 MOA Dot	Red	•	Matte	Benelli M2, Montefeltro, Ultra Light 12 Gauge	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.9 oz.	CR1632
Includes mo	unt and FastFire 3														
Beretta® 2	Xtrema/2, 391,	391 Light, and Urika	/2 12 Gauge												
300244	1.07x	21x15 mm	8 MOA Dot	Red		Matte	Beretta® Xtrema/2, 391, 391 Light, Urika/2 12 Gauge	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.9 oz.	CR1632
Includes mo	unt and FastFire 3														
Remingto	on® 870 12 Gau	ge													
300245	1.07x	21x15 mm	8 MOA Dot	Red	•	Matte	Remington® 870 12 Gauge	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.9 oz.	CR1632
Includes mo	unt and FastFire 3														
Remingto	on® 1100 and 1	187											/		
300248	1.07x	21x15 mm	8 MOA Dot	Red	•	Matte	Remington® 1100/1187	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.9 oz.	CR1632
Includes mo	unt and FastFire 3												4.85		
Beretta®	A400 Xplor														
300253	1.07x	21x15 mm	8 MOA Dot	Red	•	Matte	Beretta® A400 Xplor	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.9 oz.	CR1632
Includes mo	unt and FastFire 3														
*Example: 50 /	MOA is roughly 25 MOA	from center										200			

Oracle™ Bow Sight	

Îtem	Max trajectory angle	Laser Range (reflective)	Laser Range (non-reflective)	Operating temp	Weight	Battery	Battery life
300400	176 MOA	500y	200y	-10°F to 140°F	17 oz.	CR123	1000-2000 cycles

Droptine	Binocular	Series					1				0 / 0	3215	
Item	Magnification	Objective Diameter	Focus System	Optics System	Close Focus (feet)	Exit Pupil (mm)	Eye Relief (inches)	IP Distance Range (mm)	Field of View (Low to High, @ 1000 yds.)	Eyecups	Waterproof Depth	Weight (oz.)	Dimensions (in.)
8x42mm							ASURES						81 1197
300290	8x	42mm	Fast Focus	Roof Prism	7	5.25	0.72	57-74	340	Adjustable, Aluminum	1 meter	20.1	5.6x4.8x2.0
10x42mm													
300291	10x	42mm	Fast Focus	Roof Prism	7	4.20	0.65	57-74	300	Adjustable, Aluminum	1 meter	20.1	5.6x4.8x2.0
DROPTINE	SERIES Pr	ism: BaK-4,	phase corrected co	ating, dielectric coated	Lenses: Hi-	Lume, Index	c-matched, ful	ly multi-coated	Body: Nitro	gen filled			

tem	Magnification	Objective Diameter	Focus System	Optics System	Close Focus (feet)	Exit Pupil (mm)	Eye Relief (inches)	IP Distance Range (mm)	Field of View (Low to High, @ 1000 yds.)	Eyecups	Waterproof Depth	Weight (oz.)	Dimensions (in.)
x42mm								1				100000000000000000000000000000000000000	
00292	8x	42mm	Fast Focus	HD Roof Prism	8.2	5.25	0.77	57-74	330	Adjustable, Aluminum	1 meter	23.2	5.8x5.0x2.0
0x42mm													
00293	10x	42mm	Fast Focus	HD Roof Prism	8.2	4.20	0.61	57-74	314	Adjustable, Aluminum	1 meter	23.2	5.8x5.0x2.0
2x50mm													
00294	12x	50mm	Fast Focus	HD Roof Prism	13.1	4.16	0.61	57-74	251	Adjustable, Aluminum	1 meter	24.3	6.5x5.1x2.3









OPTICS 2020

BURRIS

SCR™ MIL	SCR™ MOA	SCR2 MIL

	20
XTR III ™ Riflescope	

XTR III ™	Riflescope		-	_	_												
Îtem	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/ Focus	Length	Weight
3.3-18x50n	nm																
201200	3.3-18x	58 mm	50 mm	44.25 mm	SCR MIL	FFP	34 mm	Matte	37.5-6.8 ft.	3.25 – 4 in.	8.6-2.7	1/10 mil or 1/4 MOA*	120 MOA/35 mil	55 MOA/16 mil	25y to $∞$	13.3	29.8 oz.
201201	3.3-18x	58 mm	50 mm	44.25 mm	SCR MOA	FFP	34 mm	Matte	37.5-6.8 ft.	3.25 – 4 in.	8.6-2.7	1/10 mil or 1/4 MOA*	120 MOA/35 mil	55 MOA/16 mil	25y to ∞	13.3	29.8 oz.
201202	3.3-18x	58 mm	50 mm	44.25 mm	SCR2 MIL	FFP	34 mm	Matte	37.5-6.8 ft.	3.25 – 4 in.	8.6-2.7	1/10 mil or 1/4 MOA*	120 MOA/35 mil	55 MOA/16 mil	25y to ∞	13.3	29.8 oz.
5.5-30x50r	nm																
201210	5.5-30x	63.5 mm	56 mm	44.25 mm	SCR MIL	FFP	34 mm	Matte	23-4.2 ft.	3.25 – 4 in.	8.6-1.8	1/10 mil or 1/4 MOA*	90 MOA/26mil	55 MOA/16 mil	20y to ∞	15.4	32 oz.
201211	5.5-30x	63.5 mm	56 mm	44.25 mm	SCR MOA	FFP	34 mm	Matte	23-4.2 ft.	3.25 – 4 in.	8.6-1.8	1/10 mil or 1/4 MOA*	90 MOA/26mil	55 MOA/16 mil	20y to ∞	15.4	32 oz.
201212	5.5-30x	63.5 mm	56 mm	44.25 mm	SCR2 MIL	FFP	34 mm	Matte	23-4.2 ft.	3.25 – 4 in.	8.6-1.8	1/10 mil or 1/4 MOA*	90 MOA/26mil	55 MOA/16 mil	20y to ∞	15.4	32 oz.

^{*}See reticle option and match up



*Knob Style Codes MAD = M.A.D. System LC = Low, Capped Knob LT - Low, Single-Turn Tactical Knob TC - Tall, Capped Knob TT - Tall, Multi-Turn Tactical Knob Z - Zero Click Stop E - Extra Low, Capped Knob (included in box)

SCR2 MIL™



Ballistic 3X™



Ballistic AR™

RT Riflescopes™ Series

*Example: 50 MOA is roughly 25 MOA in any direction from center

ltem	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Illumination	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight	Battery
RT-6 1-6X2	24mm				3.5														
200472	1-6x	30 mm	24 mm	46 mm	Ballistic AR™	•	RFP	30mm	Matte	106-18.5 ft.	3.3-4.0 in.	11.5-5.2 mm	1/2 MOA	80 MOA	80 MOA		10.3 in.	17.4 oz.	CR2032
RT-6 1-6X2	24mm Tactical I	Cit																	
200475	1-6x	30 mm	24 mm	46 mm	Ballistic AR™	•	RFP	30mm	Matte	106-18.5 ft.	3.3-4.0 in.	11.5-5.2 mm	1/2 MOA	80 MOA	80 MOA	Fixed - 100y	10.3 in.	25.4 oz.	CR2032
Tactical kit incl	ludes scope, FastFir	e™ 3, and AR-P.E.	P.R.™ Mount																
RT-15 3-15	x50mm																		
200480	3-15x	57.2mm	50mm	46mm	SCR 2"		FFP	30mm	Matte	37.5 - 7.5 ft.	3.5 - 3.8 in.	8 - 3.3 mm	0.1 mRad	80 MOA	80 MOA	25y to $∞$	13.2 in.	23.2 oz.	
RT-25 5-25	x56mm																		
200481	5-25x	64mm	56mm	46mm	SCR 2		FFP	30mm	Matte	22.5 - 4.5 ft.	3.3 - 3.6 in.	8 - 2.2 mm	0.1 mRad	65 MOA	65 MOA	25y to ∞	14.3 in.	24.8 oz.	

RT Serie	es - Prisms														
Item	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Illumination	Finish	Mount	Eye Relief	Click Value	Elevation Travel	Windage Travel	Length	Weight	Battery
RT-1															
300261	1x	33.5 mm	25 mm	24 mm	2 MOA Dot	•	Matte	Picatinny	Infinite	0.5 MOA	45 MOA	45 MOA	2.75 in.	4.8	CR2032
RT-3															
300262	3x	33.8 mm	20 mm	35 mm	Ballistic 3x		Matte	Picatinny	2.6 in.	1 MOA	50 MOA	50 MOA	3.5 in.	8.8	CR2032









T.M.P.R.	Series			£	10 3	MIN S							E	Iallistic 3X™	Ballistic AR TM	3 M	1OA Dot
Item	Magnification	Clear Objective Diameter	Reticle	Reticle Color(s)	Illumination	Finish	Mount	Field of View (@ 100 yds.)	Close Focus	Eye Relief	Click Value (MOA)	Height Above Rail to Optic Centerline	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Length [†]	Weight	Battery
T.M.P.R. 3	гм																
300224	3x	32mm	Ballistic 3X™	Black; red; green; blue		Matte	Picatinny Rail Base, AR-QD Mount	40	10 ft.	2.5 in.	0.5	1.53 in.	80 MOA	AOM 08	5.6 in.	18.2 oz.	CR123
T.M.P.R. 3	™ Tactical Kit																
300228	3x	32mm	Ballistic 3X™	Black; red; green; blue	•	Matte	Picatinny Rail Base, AR-QD Mount	40	10 ft.	2.5 in.	0.5	1.53 in.	AOM 08	AOM 08	5.6 in.	18.2 oz.	CR123
Tactical kit in	cludes T.M.P.R. 3, T.	M.P.R. Fastfire M3 an	d T.M.P.R. Laser Sigh	t													
T.M.P.R. 5	гм																
300226	5x	32mm	Ballistic AR™	Black; red; green; blue	•	Matte	Picatinny Rail Base, AR-QD Mount	24	25 ft.	2.2 in.	0.25	1.53 in.	50 MOA	50 MOA	6 in.	19.1 oz.	CR123
T.M.P.R.™	Tactical Kit																
300229	5x	32mm	Ballistic AR™	Black; red; green; blue	•	Matte	Picatinny Rail Base, AR-QD Mount	24	25 ft.	2.2 in.	0.25	1.53 in.	50 MOA	50 MOA	6 in.	19.1 oz.	CR123
Tactical kit in	cludes T.M.P.R. 5, T.	M.P.R. Fastfire M3 an	d T.M.P.R. Laser Sigh	t													
T.M.P.R. Fo	astfire M3™																
3000238		21x15mm	3 MOA	Red		Matte	TMPR Direct Mount			Unlimited	1.0	0.5 in.	115 MOA	86 MOA	1.9 in.	1.0 oz.	CR1632
T.M.P.R. Lo	ıser Sight™																
300221			5 Mil	Red		Matte	TMPR Direct Mount						60 MOA	60 MOA	4.00 in.	12.00 oz.	LR43
*Example: 50 N	OA is roughly 25 MOA	in any direction from cent	er [†] Length without sunsh	nade or flip-up covers													

78 TACTICAL SPECIFICATIONS











Ballistic 3X™

Ballistic ARTM

IA	TICA	AL JP	ECIFIC	AIIOI	43												
				4									Bollisis: 3XTM	Ballistic AR TM	Bolistic CC	QTM B	Sollistic CC
AR Sigh	nts Series			_	- New York	_											
ltem	Magnification	Clear Objective Diameter	Reticle	Reticle Color(s)	Illumination	Finish	Mount	Field of View (@ 100 yds.)	Close Focus	Eye Relief	Click Value	Height Above Rail to Optic Centerline	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Length [†]	Weight	Batte
AR-1X™																	
300214	1x	20 mm	Ballistic CQ™-1X	Black; red; green	•	Matte	Picatinny Rail Base	75 ft.	18 in.	2.7 in.	1/2 MOA	1.6 in.	120 MOA	120 MOA	4.00 in.	13.20 oz.	AA
AR-332™																	
300208	3x	32 mm	Ballistic CQ™	Black; red; green	•	Matte	Picatinny Rail Base, AR-QD Mount	32 ft.	9 ft.	2.5 in.	1/2 MOA	1.6 in.	80 MOA	80 MOA	5.30 in.	14.20 oz.	CR2
AR-332™	Tactical Kit																
300222	3x	32 mm	Ballistic CQ™	Black; red; green		Matte	Picatinny Rail Base, AR-QD Mount	32 ft.	9 ft.	2.5 in.	1/2 MOA	1.6 in.	80 MOA	80 MOA	5.80 in.	15.70 oz.	CR2
Tactical kit in	cludes sight, FastFir	re 2, and ARD															
AR-536™																	
300210	5x	36 mm	Ballistic CQ™	Black; red; green		Matte	Picatinny Rail Base, AR-QD Mount	20 ft.	25 ft.	2.5-3.5 in.	1/3 MOA	1.6 in.	70 MOA	70 MOA	5.80 in.	18.75 oz.	CR2
AR-536™	Tactical Kit																
300223	5x	36 mm	Ballistic CQ™	Black; red; green	•	Matte	Picatinny Rail Base, AR-QD Mount	20 ft.	25 ft.	2.5-3.5 in.	1/3 MOA	1.6 in.	70 MOA	70 MOA	6.25 in.	20.25 oz.	CR2
Tactical kit in	cludes sight, FastFir	re 2. and ARD															

Combo package includes sight and AR-Pivot Ring, Quick Detach

*Example: 50 MOA is roughly 25 MOA in any direction from center $^\dagger \text{Length}$ without sunshade or flip-up covers





4 MOA Dot





FastFire™ S	eries													
Item	Clear Objective Diameter	Reticle	Reticle Color(s)	Illumination	Finish	Mount	Eye Relief	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight	Battery
FastFire™ 2														
300232	21x15 mm	4 MOA Dot	Red	•	Matte	Picatinny Mount	Unlimited		115 MOA	86 MOA	Parallax-free	1.8 in.	1.50 oz.	CR2032
FastFire™ 3														
300234	21x15 mm	3 MOA Dot	Red	1	Matte	Picatinny Mount	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.50 oz.	CR1632
300236	21x15 mm	8 MOA Dot	Red	5	Matte	Picatinny Mount	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.50 oz.	CR1632
FastFire™ 4														
300259		Multi-Reticle	Red		Matte	Picatinny Mount / Doctor Optic	Infinite	1 MOA	90 MOA	90 MOA		1.9 in.	1.6 oz.	CR1632
FastFire™ RD														
300260	35.5 mm	2 MOA Dot	Red		Matte	Picatinny Mount	Infinite	1 MOA	90 MOA	90 MOA	Hand San	2.8 in.	6.4 oz.	AAA
AR-F3™														
300215	21x15 mm	3 MOA Dot	Red		Matte	Picatinny Rail Base	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	2.0 in.	4.60 oz.	CR1632









BURRIS FOREVER WARRANTY™

Every Burris optic is covered by the Burris Forever Warranty $^{\text{TM}}$. We will repair or replace your Burris optic if it is damaged or defective. The warranty is automatically transferred to future owners.

- No repair or replacement charge
- No questions asked
- No warranty card needed
- No receipt needed



LEGAL INFORMATION

The following are trademarks of Burris Company, Inc.: AR Riflescopes™, AR Riflescopes™, AR-1X™, AR-332™, AR-536™, AR-F3™, AR-P.E.P.R.™, AR-Pivot Ring™, Quick Detach, AR-Tripler™, Ballistic CQ™, Ballistic CQ™-1X, Ballistic Mil-Dot, Ballistic Plex E1™, Ballistic Plex E1™ FFP, Ballistic Circle Dot™, Ballistic Plex E1™ MV, Ballistic Plex™, Ballistic Car™, Ballistic Circle Dot™, Ballistic Dot™, Burris®, C4 Plus™, C4 Wind MOA™, Double Dovetail™, Droptine™, Electro-Dot™, Eliminator® III LaserScope® Series, FastFire™ III, FastFire™ III, FastFire™, Forever Warranty™, FourX™, Fullfield E1™, Fullfield II™, Fullfield TAC30™, G2B Mil-Dot™, High Country™, HiLume™, Horus® H591™, Long-Range MOA, LRS™, MSR Riflescopes™, MTAC™, Oracle™, Pos-Align® Inserts, Posi-Lock™, PTC™, Ruger®-to-Weaver Base Adapter, Scope Tube FastFire™ Mounts, SCR™, SCR™ MII, SCR™ MOA, Signature Rings™, SkullTacc™, SpeedBead™, StormCoat™, T.M.P.R.™, Timberline™, Veracity™, WindMap™, XTB™, XTR II™, XTR III™, XTR Signature Rings™, Signature HD™, Xtreme Tactical™ Bases, Xtreme Tactical™ Rinas, XTS-2575™.

The following firearm brand and model names are registered trademarks of their respective owners: Benelli Super Black Eagle, Super Black Eagle II, M1, M2, Montefeltro, Ultra Light, Super Nova, R1, ARGO, Legacy, Sport II, Super Sport, Cordoba; Beretta 92, 96, 90-TWO, Cougar, PX4 Storm; Browning Silver Auto, Maxus, Gold; Franchi I-12; Glock; Marlin 336, 444, 1895. Remington 870, 1100, 1187; Sig Sauer P226; Smith & Wesson M&P; Springfield XD; Stoeger 2000, P-350, 3500. Winchester SX3, M94. CZ is a registered trademark of CZ-USA. Franchi is a registered trademark of Franchi S.P.A. Kimber is a registered trademark of Kimber Mfg., Inc. 10/22, 77/22, 77/17, 77/44, 77/ML, Blackhawk, Mark I, Mark II, Mark III, Mini-14, M77, Redhawk, Ruger, Ruger No. 1, Super Blackhawk Hunter, and Super Redhawk are registered trademarks of Sturm, Ruger & Co., Inc. Marlin is a registered trademark of Remington Arms Company, LLC. Smith & Wesson is a registered trademark of Smith & Wesson Corp. Taurus is a registered trademark of Forjas Tauras S.A.

Tikka is a registered trademark of Sako Ltd., Corp. Torx is a registered trademark of Textron Inc. Leupold is a registered trademark of Leupold & Stevens, Inc. Predator Quest is a registered trademark of Predator Quest, LLC. Realtree Max-1® is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Horus® H591™ is a registered trademark of Horus Vision, LLC produced upon license from Horus Vision, LLC and may be covered by pending or issued patents or may have certain limitations. Please visit Horus Vision, LLC's website for more information: www.horusvision.com.

Burris products are protected by one U.S. Patents: burrisoptics.com/patents.

All prices and specifications are subject to change without notice.

© Copyright 2020 Burris Company

Burris. GEAR

Style up with the latest Burris apparel and give yourself the performance edge with these quality Burris accessories.

VISIT OUR NEW ONLINE STORE TO FIND THE LATEST BURRIS BRANDED ITEMS!

WWW.BURRISOPTICS.COM/GEAR

CUSTOMER SERVICE

REPAIRS

For product support of warranty service go to https://burris.supportsync.com

BALLISTICS SERVICES

Get custom scope work, knob conversions and reticle upgrades. Call 888-440-0244 for a quote and estimated turnaround time, and to order. **ballistics.burrisoptics.com**

PRODUCT MANUALS

Download Burris Optics product manuals at **burrisoptics.com/customer-service/manuals**.

FAQS

Find answers to common Burris Optics questions at **burrisoptics.com/customer-service/faqs**.

REBATES, PROMOTIONS AND NEW PRODUCTS

Sign up to receive emails about rebates, promotions and brand new products. Go to **burrisoptics.com/email-subscription**.

