

FIND WHAT MATTERS

2017 NEW PRODUCTS 3 || TACTICAL **BALLISTIC SERVICES** 4 **BURRIS TECHNOLOGY** 6 HUNTING 8 ELIMINATOR® III LASERSCOPES® 10 VERACITY™ RIFLESCOPES 14 FULLFIELD E1™ RIFLESCOPES 16 FULLFIELD II™ RIFLESCOPES 18 PREDATOR QUEST® RIFLESCOPES 20 DROPTINE™ RIFLESCOPES 22 SCOUT RIFLESCOPES 24 TIMBERLINE™ RIFLESCOPES 25 HANDGUN SCOPES 26 SPEEDBEAD™ SHOTGUN MOUNT 28 BINOCULARS & SPOTTING SCOPE 30

TACTICAL	32
XTR II™ RIFLESCOPES	34
MTAC [™] RIFLESCOPES	38
RT-6 RIFLESCOPES™	40
CQB TACTICAL KITS	42
AR RIFLESCOPES™	44
AR SIGHTS	42
FASTFIRE™	44
RINGS, MOUNTS	S, RETICLES
AND ACCESSOR	IES 50
RINGS AND MOUNTS	52
HUNTING MOUNT FIT C	CHART 58
TACTICAL MOUNT FIT C	HART 59
RETICLES	60
HUNTNG PRODUCT SPE	CS 70
TACTICAL PRODUCT SPE	CS 74
ACCESSORIES	78

WARRANTY AND CUSTOMER SERVICE

79





2017 NEW PRODUCTS



DROPTINE AND SIGNATURE HD BINOCULARS Page 30

Burris binoculars are back! The new Droptine and Signature HD binoculars continue the Burris tradition of reliability, affordability and performance. High-performance HD lenses and BaK prisms produce sharper images and edge-to-edge clarity. There are two Droptine models: 8x42 and 10x42. The Signature HD line offers a choice of 8x42, 10x42 and 12x50.



SIGNATURE HD SPOTTING SCOPE Page 31

Take glassing to a higher level with a Burris Signature HD Spotting Scope. With a 20-60x magnification range, you can save time and boot leather by finding and evaluating trophy animals from a mountain away. The HD lenses and apochromatic lens system eliminate color fringing and deliver edge-to-edge resolution at any magnification. Also new, an accessory eyepiece in 30x fixed power.

NEW RIFLESCOPES

RT-6 RIFLESCOPE Page 41

Race inspired and tactical strong, the RT- 6^{TM} is built for speed, accuracy and easy handling. Guaranteed to shave seconds off the clock, it is shorter than most 1-4x scopes and you'll find this scope is quick to point and easy to handle. The 6x zoom with true 1x setting allows eyes open engagement at close range and the Ballistic ARTM mil reticle with trajectory compensation puts you on target out to 600 yards.

XTR II RIFLESCOPES Page 37

The popular XTR II line of tactical scopes offer greater choices in 2017 with a new Dark Earth color option on the 5-25x50mm and a non-illuminated version of SCR reticle on the 3-15x50mm, 4-20x50mm and 5-25x50mm models

XTREME TACTICAL 1-PIECE BASES

Page 57

The new Xtreme Tactical one-piece bases offer the perfect mounting solution for precision shooters. In addition to greater strength and rigidity, the 25 MOA cant offers extended range capability.





MTAC 1-4x24mm Blackout and Sandstorm finish



MTAC PRYM1 CAMO Page 39

The proven MTAC 1-4x24mm riflescope has a new look for 2017. Two new models come wrapped in Prym1 camo. Choose from Sandstorm or Blackout patterns to make your favorite AR stand out on the range.



BURRIS BALLISTIC SERVICES

BALLISTICS.BURRISOPTICS.COM

The new Burris Ballistic Services is a set of sophisticated online ballistic tools that will allow you to master any Burris ballistic compensating reticle, build a dope card, program your Eliminator riflescope, or order custom elevation and windage knobs. With our easy-to-use software, expansive cartridge and bullet libraries, and highly customizable results, the Burris Ballistic Services will turn you into a reticle expert and a pro on the shooting range.

BALLISTIC RETICLE ANALYSIS CALCULATOR



Burris offers a wide variety of reticles, and this tool ensures you can utilize their full potential. It's easy to match your environment, cartridge, gun and scope to provide the exact reticle data you need. Whether you dial in a solution, or prefer an exact holdover, this tool will calculate it for you. Learn precisely where your shot will fall at any distance.

DOPE CARD



The Dope Card tool was designed with the serious shooter in mind, but it's also a great way for anyone to learn more about long-range shooting. We've taken the same ballistics engine from the Ballistic Reticle Analysis tool and added scalable formats and numerous printing options to further customize your shooting experience. The Burris Dope Card tool provides a level of detail that goes beyond the vast majority of ballistic tools available now.



BULLET LIBRARY

Ballistics really begin with your bullet. The better the bullet info, the better your results. The Burris Ballistic Services are centered around the best bullet and cartridge libraries in the business: almost 7,000 different cartridges and bullets are included from nearly every manufacturer. Rimfire, centerfire, even muzzleloader and shotgun shells are included in our comprehensive list. It contains G1 and G7 profiles, for precise accuracy.

Handloaders can start with a similar factoryproduced cartridge and customize values to match your load, or simply enter all information from scratch.

ST	EP 2	
Select Amm	unition Type	
Factory load	O Hand Load	
Factory	Ammo Details	1
letect Ammunition manufactu	~	
HORNADY		
elect Cartridge		
6.5 CREEDMOOR		15
elect Bullet Weight/Style/Typ	or Oreacription	
City Mich Annu Streams - 1010 City UM, bayelonases - 1010 City UM, bayelonases - 1000 City US and bayelonases - 1000 City International Superformance - 1000 City International City III City ANNA - 100 ANNI City ANNA - 1	24 90 5 490 14 10 6 490 16 0 6 490 6 40 6 490	1
Mussle Velocity:	Balistic Coefficient	
2910	0.465	

BURRISOPTICS.COM



CUSTOM KNOBS



NINDMAP

Burris now offers custom knobs for most of our riflescopes. This function allows you to modify the elevation knob to match your exact cartridge and environmental shooting conditions.

The following list of Burris riflescopes can accept custom knobs and options can be ordered using the Custom Knob tool:

• AR RIFLESCOPES

MSR RIFLESCOPES

C4 PLUS

- PREDATOR QUEST
- DROPTINE


• VERACITY

• FULLFIELD E1

• XTR II

ELIMINATOR LASER RIFLESCOPE

The Eliminator LaserScope requires basic programming to work correctly, and you must enter two numbers for accurate results: the Ballistic Coefficient of your bullet, and your bullet's Drop Number at 750 yards. Using our industry-leading bullet library and ballistic engine, you can now quickly get the ballistic information needed to program your Eliminator scope.



Page 5

CUSTOM SERVICES AND TECHNICAL HELP

Burris offers even more ballistic services for your favorite Burris riflescope. We can replace reticles on some scopes and convert tactical knobs to hunting knobs. Call 970-356-1670 to order.

M.A.D. SYSTEM

The Modular Adjustment Dial (M.A.D.) System allows shooting enthusiasts choose from exposed competitionstyle knobs or capped knobs on both windage and elevation turrets.

This design also lets you add custom knobs with laser markings that perfectly match the trajectory of any ammunition. Zero Click Stop functionality is standard in the M.A.D. System, making it easy to reset to the original zero setting without counting clicks.

The following configurations are possible in the M.A.D. System:

- Capped knobs with Mil or MOA markings
- Exposed knobs with Mil or MOA markings
- Capped knobs with custom trajectory markings
- Exposed knobs with custom trajectory markings

The knobs are easily changed with a hex key that is included with the scope. Shooters will be able to request an exposed windage knob at no cost, and will be able to order custom knobs through Burris Customer Service at www.ballistics.burrisoptics.com.

The M.A.D. System is available for select XTR II and Veracity models. See the chart for specific models.



		ELEVATION		WINDAGE		
		Low	Low	Low	Low	
		Capped	Exposed	Capped	Exposed	
XTR II		Knob	Knob	Knob	Knob	
201003	1-5x24mm	•	•	•		
201004	1-5x24mm	•	•	•		
201105	1-5x24mm	•	•	•		
201013	1.5-8x28mm	•	•	•		
201014	1.5-8x28mm	•	•	•		
201015	1.5-8x28mm	•	•	•		
201018	1-8x24mm	•		•		
201019	1-8x24mm	•	- • ~	•		
VERACIT	Y					
200621	2-10X42mm	•		•		
200636	3-15x50mm	•		•		
200641	4-20x50mm			•		
200651	5-25x50mm	•		•		
200652	5-25x50mm	•	•	•	•	

Installed on scope
 Packaged with scope

BURRIS TECHNOLOGY

Premium optical glass and top-quality lens coatings ensure that the best image possible is delivered every time you look through a Burris scope. The durable construction and precise, easy-to-use adjustment system gives you the confidence that your Burris scope will perform reliably every time. With the added benefits of being fogproof, waterproof and shockproof, feel secure that your Burris scope will endure whatever Mother Nature throws at you.

PREMIUM OPTICAL QUALITY



Burris uses high-grade optical glass and designs prescriptions specifically for each lens inside each scope. Lens prescription tolerances are measured in 1/10,000,000 of an inch. 100% of lenses are inspected multiple times during lens and scope production.

Pros of using high-grade glass:

- Bends light efficiently as it magnifies
- Free from impurities/scratches/bubbles
- Clear and bright images



Pros of using scope-specific lens prescriptions:

- Sharp, high-definition images
- Flat field of view
- True color

The commitment to using high-grade glass ensures that Burris riflescopes:


- Don't lose light within the scope
- Don't produce blurry or cloudy images
- Don't create "fishbowl" image distortion
- Don't create heavily tinted or dull colored images

TOP-QUALITY LENS COATINGS

Burris uses anti-reflective and scratch resistant coatings so the best optical glass can perform even better.

Burris Index-Match HiLume™ Multicoating

- Maximizes light transmission for premium image quality
- Minimizes glare for better visibility
- 99.5 to 99.8% light transmission per lens surface



AS LIGHT PASSES THROUGH EACH LENS SURFACE, THE QUALITY OF LIGHT DIMINISHES. USING HIGH-QUALITY BURRIS LENS COATINGS ON EVERY LENS SURFACE ENSURES THE BEST IMAGE POSSIBLE IS DELIVERED TO YOUR EYE.

Scratch Resistant Coating

- Placed on top of the anti-reflective coating to prevent lens damage
- Extends the life of the scope by preventing dings and scratches



FOGPROOF AND WATERPROOF



- All air and humidity are evacuated from each scope and replaced with laboratory-grade dry nitrogen before final sealing to ensure the scope will never fog
- Scopes are sealed to prevent leaks resulting in complete waterproof performance

SHOCKPROOF



- Additional strength is engineered into each component
- Scopes are put through rigorous recoil testing, absorbing over 1,000 G forces without failure

RUGGED CONSTRUCTION

Advanced engineering and attention to detail create rugged, reliable riflescopes that will endure a lifetime of hard use.

6061 T-6 aluminum scope tubes

- 35,000 40,000 PSI yield strength
- Corrosion resistant
- Used in AR-15 upper & lower receivers, aircraft wings and fuselage, SCUBA Tanks

Solid one-piece tube design

- Machined from a single piece of seamless aluminum tubing
- No threaded joints or connections to fail or leak
- Lightweight

Double Internal Spring System

 Provides nearly double the force of single spring systems to ensure that point of impact will not shift

Precision-gauged, hand-fitted parts

• Perfect fit of internal parts guarantees accurate performance

PRECISION ADJUSTMENT SYSTEM

Every Burris riflescope features a steel-on-steel adjustment system that is positive and repeatable, with audible clicks.

Accurate and positive adjustments

- Precise tolerances ensure that each click moves the point-of-impact the correct amount
- Hardened steel-on-steel designs for long-term performance
- Finger-adjustable clicks are both tactile and audible

Wide variety of shooter and situation specific options

- Low or high profile adjustment knobs
- MOA or Mil increments, dimensionally matched to the reticle
- Customizable knobs available for order
- "M.A.D" System (Modular Adjustment Dial system) available on premium riflescope lines



OPTICS FOR THOSE WHO BELIEVE A WEEK of not Showering IS EVEN MORE



Finding big, open corners of the world still devoid of a cell signal. The relationships solidified while packing an animal out in the moonlight. The laughter around the campfire as the last flame hangs on. Those familiar with Burris know well what matters. It's about self-reliance. Respect for the game and those you hunt beside. Pushing yourself season after season to be your absolute best. For more than 40 years we've been right there with you, pushing ourselves for the same reasons: We know exactly how much the season means to us, and that's why you can forever trust your hunt to Burris.





ELIMINATØR III®


The Eliminator[®] III LaserScope[™] is the most innovative and effective hunting riflescope in the world. Combining outstanding optics, pinpoint laser rangefinding, and precision trajectory compensation for the exact ammunition you choose for your hunt, it eliminates most of the variables and guesswork that often cause hunters to go home empty-handed. In one fast sequence the Eliminator III determines the distance to your target, factors in your trajectory and illuminates the perfect holdover. It's that simple.

The Eliminator III significantly extends the range and accuracy of your favorite rifle. No other riflescope combines the level of quality, technology, accuracy, repeatability, speed and effectiveness. It will greatly increase the distance at which you can make an ethical shot.

HUNT




Page 11

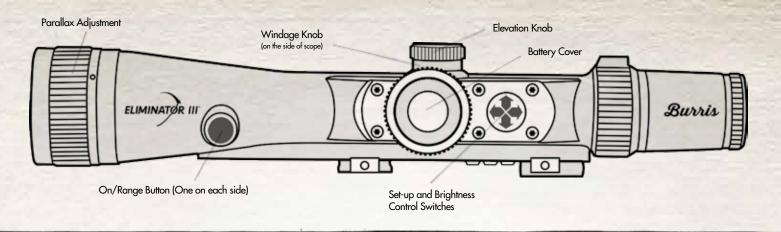

KEY FEATURES

- Built-In Laser Rangefinder. Laser range capability out to 1,200-plus yards with reflective target, 750-plus yards with non-reflective target. Allows you to range your target without carrying additional equipment. New model with remote cable switch makes ranging activation even easier.
- Automatic Trajectory Compensation. Customized trajectory compensation calculates the perfect holdover at your exact distance; program your cartridge's ballistics information, push a button and a bright-red, illuminated dot signifies your new aiming point. Trajectory compensation works on any magnification.
- Integrated Inclinometer. Integrated inclinometer adjusts for any angle on uphill or downhill shots.
- Wind Hold-Off. Scope displays a 10 mph Wind Value to indicate wind hold-off for your specific cartridge at the indicated range to target. Wind Value represents how many dots to hold into the wind for a 10 mph crosswind.
- **Strong, Low Mounting.** Riflescope comes with its own bases that attach to any Weaverstyle or Picatinny base. No rings required.

EASY PROGRAMMING

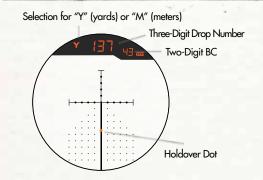

The Eliminator III utilizes sophisticated technology, but setup is simple and easy to do. After mounting and sighting-in your riflescope at 100 yards, follow these simple steps to program your Eliminator III:

1. Select Yards or Meters.

- 2. Enter Drop Number. Determine the Drop Number at 750 yards for your specific load. Find this number in the Cartridge List provided by Burris (over 1,500+ of the most common cartridges) or use the new Burris Ballistic Services software to find the correct Drop Number.
- Enter Ballistic Coefficient. The two-digit BC for your ammunition can also be found in the Cartridge List or by using the new Burris Ballistic Services software.

WINDAGE COMPENSATION



Example 300 yards 10-mph crosswind shooter holds .9 dots into the wind shooter holds 1.7 dots into the wind

While complete wind compensation is not fully automated within the scope, it gives the shooter the tools needed to make a calculated hold-off estimate. In addition to distance, the scope's digital display will show a 10 mph Wind Value for your specific cartridge at the indicated range to your target. This Wind Value represents how many dots to hold into the wind for a 10 mph crosswind. Estimate the actual wind speed and use the 10 mph Wind Value as a guideline for selecting how many dots to hold into the wind.







ELIMINATOR III LASERSCOPE 3-12x44mm

HUNT

ITEM NUMBER: 200120 RETICLE:

X96 RETICLE

ADJUSTABLE PARALLAX: **50 YDS. TO INFINITY**

- The lowest magnification in the series produces a compact, lightweight option
- Strong, low mounting system with its own bases mounts to any Weaver-style or Picatinny base; no rings required
- Reticle displays a 10 mph Wind Value to indicate wind hold-off for your specific cartridge at the indicated range to target; you estimate the actual wind speed and use the Wind Value as a guide to determine the number of dots to hold into the wind



ELIMINATOR III LASERSCOPE 4-16x50mm

ITEM NUMBER: 200116, 200119

RETICLE: **X96 RETICLE**

Series Features

ADJUSTABLE PARALLAX: **50 YDS. TO INFINITY**

- High magnification extends your long-range shooting capability
- 50 mm objective allows for maximum light collection
- Strong, low mounting system with its own bases mounts to any Weaver-style or Picatinny base; no rings required
- Reticle displays a 10 mph Wind Value to indicate wind hold-off for your specific cartridge at the indicated range to target; you estimate the actual wind speed and use the Wind Value as a guide to determine the number of dots to hold into the wind
- New model 200119 features Remote Cable Switch for convenient operation of On/Range button; expanded ballistic capability accomodates centerfire, rimfire, muzzleloader and slug gun loads
- Customized trajectory compensation calculates the perfect holdover at your exact distance; program your cartridge's ballistics information, push a button, and a bright red, illuminated dot signifies your new aiming point in a split second
- Built-in laser rangefinder features 1,200+ yards ranging capability
- Trajectory compensation is accurate at any magnification
- Integrated inclinometer compensates for shots at any uphill or downhill angle
- Reticle X96 Reticle

Two words: no guesswork. It's plug and play in a rangefinding scope that goes even bigger: Just feed the Eliminator III your cartridge's ballistic info and the scope calculates perfect holdover at your exact distance, estimates wind drift, then gives you the bright red dot of accuracy in seconds-all at the push of a button.



BURRIS

ELIMINATOR® III


Laserscope

WATERPROOF

FOGPROOF

SHOCKPROOF

NITROGEN-FILLED

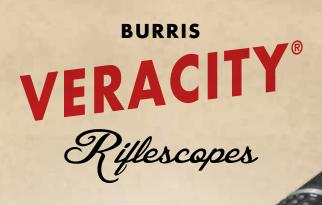

The finest in premium, light-gathering scopes. This is time-proven Burris engineering that won't fail when it's go-time, combined with state-of-theart refinements like 5x zoom and front focal plane reticles that deliver excellent target acquisition and a closer look at the big, bright picture.





WATERPROOF SHOCKPROOF


FOGPROOF NITRO

NITROGEN-FILLED



VERACITY RIFLESCOPE 2-10x42mm

MAIN TUBE SIZE: 30 mm ADJUSTABLE SIDE PARALLAX: 50 YDS, TO INFINITY Low-profile adjustment knobs have fingeradjustment zero for windage and elevation; easily resets to zero once sighted-in



ITEM NUMBERS:	MAIN TUBE SIZE:
200636 (M.A.D.)	30 mm
RETICLE:	ADJUSTABLE SIDE PARALLAX:
BALLISTIC PLEX E1™ FFP	50 YDS. TO INFINITY

- Low-profile adjustment knobs have fingeradjustment zero for windage and elevation; easily resets to zero once sighted-in
- 50 mm objective allows for maximum light collection

VERACITY RIFLESCOPE 4-20x50mm

	ITEM NUMBER: 200641 (M.A.D.)
11	RETICLE: BALLISTIC PLEX E1™ FFP
	ISTABLE SIDE PARALLAX: IDS. TO INFINITY

- Designed for precise adjustment at extreme ranges, perfect for varmint hunting; multi-turn target knobs offer up to 15 MOA of adjustment per rotation
- 50 mm objective allows for maximum light collection
- Ergonomic side focus allows easy-to-reach parallax adjustment
- Zero Click Stop adjustment knobs allow quick, easy return to original yardage setting without counting clicks



HUNT





VERACITY RIFLESCOPE 5-25x50mm

ITEM NUMBERS:	ITEM NUMBER:
200650	200651 (M.A.D.)
RETICLE:	RETICLE:
BALLISTIC PLEX E1™ FFP VARMINT	BALLISTIC PLEX E1

 ITEM NUMBER:
 ITEM NUMBER:

 200651 (M.A.D.)
 200652 (M.A.D.)

 RETICLE:
 RETICLE:

 BALLISTIC PLEX E1™ FFP
 SCR™ MOA


MAIN TUBE SIZE: ADJUSTABLE SIDE PARALLAX: 30 mm 50 YDS. TO INFINITY

- Designed for precise adjustment at extreme ranges, perfect for varmint hunting; multi-turn target knobs offer up to 15 MOA of adjustment per rotation
- 50 mm objective allows for maximum light collection

Features

Series

- Ergonomic side focus allows easy-to-reach parallax adjustment
- Zero Click Stop adjustment knobs allow quick, easy return to original yardage setting without counting clicks



 Front focal plane reticle design allows the reticle size to increase or decrease as magnification is increased or decreased; trajectory compensation is always correct for the selected power setting

- Advanced windage and elevation adjustment is accurate and repeatable, and matches the reticle's MOA measurement system
- Models feature the M.A.D. System providing more accessibility and customization to windage and elevations knobs and settings







ITEM NUMBERS: 200621 (M.A.D.) RETICLE: BALLISTIC PLEX E1™ FFP

BURRIS FULLFIELD E1™ Riflescopes

They don't call it the Lonesome West for nothing, and windswept distances of 500-plus yards are exactly where the E1 delivers a fatal blow with cascading dots for windage and optimal elevation compensation. Precision-ground optical glass and multi-coated lenses resist glare and transmit maximum light in those lowlight conditions.



WATERPROOF SHOCKPROOF

FOGPROOF

NITROGEN-FILLED

 (N_2)



FULLFIELD E1 RIFLESCOPE 2-7x35mm

ITEM NUMBER: 200317

 Low-magnification model is compact and lightweight; allows low mounting height

RETICLE: BALLISTIC PLEX E1™

MAIN TUBE SIZE: 1 in.

FULLFIELD E1 RIFLESCOPE 3-9x40mm

ITEM NUMBERS: 200320, 200322 (Illuminated reticle) RETICLE: BALLISTIC PLEX E1™ MAIN TUBE SIZE:

1 in.

 Most popular and versatile model • Available illuminated reticle has 10 settings from low light to daylight; reduces time to get on target in any lighting condition and increases accuracy when target is dark





FULLFIELD E1 RIFLESCOPE 3-9x50mm

ITEM NUMBER: 200330 RETICLE: BALLISTIC PLEX E1TM MAIN TUBE SIZE: 1 in.

50 mm objective allows for maximum light collection

FULLFIELD E1 RIFLESCOPE 4.5-14x42mm ITEM NUMBER:

200344

RETICLE:

ITEM NUMBER: 200338 RETICLE: BALLISTIC PLEX E1™

- High magnification extends your longrange shooting capability
 - Ergonomic side focus allows easy-toreach parallax adjustment

MAIN TUBE SIZE: 1 in.

ADJUSTABLE SIDE PARALLAX: **50 YDS. TO INFINITY**

LONG-RANGE MOA

FULLFIELD E1 RIFLESCOPE 6.5-20x50mm


- · High magnification extends your long-range shooting capability
- ITEM NUMBER: 200341
- Ergonomic side focus allows easy-to-reach parallax adjustment RETICLE:
- BALLISTIC PLEX E1™ MV

MAIN TUBE SIZE: 1 in.

ADJUSTABLE SIDE PARALLAX: **50 YDS. TO INFINITY**



- State-of-the-art Ballistic Plex E1[™] reticle features trajectory compensation out to 500 yards with cascading dots to compensate for crosswinds
- Features • High-grade optical glass provides excellent brightness and clarity with lasting durability
- Series • Quality, precision-ground lenses are larger than those of comparable scopes, for better light transmission
- Index-matched, HiLume[™] multicoating aids in low-light performance and glare elimination, increasing your success rate
- Finger-adjustable windage and elevation turrets create a sleek profile; turret indications always reflect a change in the point of impact, for pinpoint accuracy

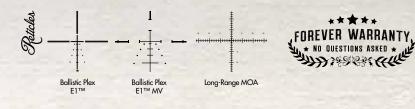





BURRIS FULLFIELD™ II Riflescopes

A scope company's always been judged by the strength of its workhorse. This is our team of Clydesdales, borne of high-performance optical glass in a trusted, reliable, durable platform that puts clarity and peak contrast in any lighting condition above all.





NITROGEN-FILLED

WATERPROOF S

SHOCKPROOF

FOGPROOF



FULLFIELD II RIFLESCOPE 2-7x35mm

ITEM NUMBER: 200123

• Low-magnification model is compact and lightweight; allows low

RETICLE: BALLISTIC PLEXTM mounting height

MAIN TUBE SIZE: 1 in.

FULLFIELD II RIFLESCOPE 3-9x40mm


ITEM NUMBER: ITEM NUMBERS : Available with matte or nickel finish 200161 200162, 200169 RETICLE: RETICLE: **BALLISTIC PLEX™** PLEX

Burnie

MAIN TUBE SIZE: 1 in.

FULLFIELD II RIFLESCOPE 4.5-14x42mm

ITEM NUMBER: 200183 RETICLE: **BALLISTIC PLEX™** MAIN TUBE SIZE: 1 in. ADJUSTABLE PARALLAX: **50 YDS. TO INFINITY**





FULLFIELD II RIFLESCOPE 6.5-20x50mm

• Index-matched, HiLume™ multicoating aids in low-light

performance and glare elimination, increasing your success rate


ITEM NUMBER: 200193	 High magnification and mil-dot reticle extends long-range shooting capability
RETICLE: BALLISTIC MIL-DOT	• 50 mm objective allows maximum light collection
MAIN TUBE SIZE: 1 in.	Parallax adjustment provides improved accuracy at long distant
ADJUSTABLE PARALLAX:	



50 YDS. TO INFINITY



• Popular, premium hunting riflescope at an affordable price

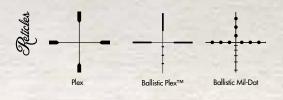

Features Series

BURRIS PREDATOR QUEST® Riflescopes

Fast-moving, camouflaged critters present an even bigger challenge when the light's failing. World-champion coyote caller and all-out legend Les Johnson is no stranger to this fact. With his help, we designed this light-gathering scope that quickly compensates for wind and elevation, then eliminates glare and detection for the ultimate advantage.



SHOCKPROO



WATERPROOF

FOGPROOF NITROGEN-FILLED

Predator Quest® is a registered trademark of Predator Quest, LLC. Realtree Max-1® is a registered trademark of Jordan Outdoor Enterprises, Ltd.




PREDATOR QUEST® RIFLESCOPE 2-7x35mm

ITEM NUMBER: 200367 RETICLE: BALLISTIC PLEX E1TM

1 in.

 Low-magnification model is compact and lightweight; allows low mounting height

MAIN TUBE SIZE:





ITEM NUMBERS: 200364, 200365 (Camo finish) RETICLE: BALLISTIC PLEX E1TM

MAIN TUBE SIZE: 1 in.

• Versatile riflescope can engage close-, mid-, and long-range targets • Matte black or Realtree Max-1® Camo finishes available





PREDATOR QUEST® RIFLESCOPE 4.5-14x42mm

ITEM NUMBERS: 200370, 200371 (Camo finish)


RETICLE: BALLISTIC PLEX E1™

MAIN TUBE SIZE: 1 in.

Teatures

Series

ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY



• Ergonomic side focus allows easy-to-reach parallax adjustment

Matte black or Realtree Max-1® Camo finishes available



• State-of-the-art Ballistic Plex E1 reticle features trajectory compensation out to 500 yards with cascading dots to compensate for crosswinds or moving targets

• Threaded Anti-Reflection Device (ARD) reduces lens glare to prevent detection, and aids in spotting game in the rising or setting sun

 Index-matched, HiLume[™] multicoating provides lowlight performance and glare elimination, increasing your success rate

• Finger-adjustable windage and elevation turrets create a sleek profile; indications always reflect a change in the point of impact for pinpoint accuracy



Ballistic Plex™ E1



鸷



BURRIS DROPTINE™ Riflescopes

Step into legendary Burris performance with a scope that steps up your game. Our reliable, high-quality glass is glare-resistant and superbly capable in low light, with a shockproof design that gives you the most for your dollar and more.

WATERPROOF SHOCKPROOF

(j)

FOGPROOF N

R

OF NITROGEN-FILLED

(N₂)



DROPTINE RIFLESCOPE 2-7x35mm

ITEM NUMBERS: 200015, 200016 RETICLE:

• Available with focus set at 50 yards and calibrated for .22 LR ammo • Available with focus set at 75 yards and calibrated for slug guns

BALLISTIC PLEXTM MAIN TUBE SIZE:

1 in.



DROPTINE RIFLESCOPE 3-9x40mm

ITEM NUMBERS: 200017, 200019 RETICLE:

• Available with focus set at 100 yards for centerfire loads

• Available with focus set at 50 yards and calibrated for .22 LR ammo

BALLISTIC PLEXTM MAIN TUBE SIZE:

1 in.

DROPTINE RIFLESCOPE 3-9x50mm

ITEM NUMBER: 200049

• 50 mm objective allows for maximum light collection

RETICLE: BALLISTIC PLEXTM MAIN TUBE SIZE:

1 in.

DROPTINE RIFLESCOPE 4.5-14x42mm



ITEM NUMBER: 200078 RETICLE: G2B MIL-DOT™

MAIN TUBE SIZE: 1 in.

Teatures

Series

ADJUSTABLE PARALLAX: **50 YDS. TO INFINITY**



- High-grade optical glass provides excellent brightness, clarity, and lasting durability
- Quality precision-ground lenses are larger than those of comparable scopes, for better light collection
- Index-matched, HiLume™ multicoating aids in low-light performance and glare reduction, increasing your success rate
- Finger-adjustable windage and elevation turrets create a sleek profile; indications always reflect a change in the point of impact for pinpoint accuracy
- Simple, rugged reticles have holdovers for precise shots at extended ranges



Ballistic Plex™ G2B Mil-Dot™







BURRIS **SCOUT** Riflescopes



Specifically designed to match scout rifles, our slim, compact optics give you low-to-medium magnification perfect for close- to mid-range targets. Placed well forward on the rifle, you'll getand keep-both eyes perfectly on targets both moving and still. And when that happens, well, we all know what goes down next.





WATERPROOF SHOCKPROOF FOGPROOF

NITROGEN-FILLED



SCOUT RIFLESCOPE 2-7x32mm

1 in.

MAIN TUBE SIZE:

ITEM NUMBER: 200261 RETICLE: BALLISTIC PLEXTM Variable power for versatility and improved accuracy at longer distances



SCOUT RIFLESCOPE 2.75x20mm

1 in.


MAIN TUBE SIZE:

ITEM NUMBER: 200269 RETICLE: **HEAVY PLEX** • Fixed 2.75x power, the perfect magnification setting for both-eyes-open scout rifle shooting

Teatures • For shooters who need a working rifle or fighting carbine and use the multi-purpose scout rifle, a concept developed by the legendary Col. Jeff Cooper

 Compact and lightweight, so it's easy to carry your rifle in the field

 Forward mounting design allows mounting in front of the ejection port, for extended eye relief and both-eyes-open shooting with unobstructed access to the cartridge port; beneficial for fast target acquisition and increased situational awareness



HUNT



Page 25

TIMBERLINE™ Riflescopes **BURRIS**

Those who love muzzleloaders, slug guns, or hunting with big-bore rifles know a scope can truly bite if you squeeze one off with your face too close to the eyepiece. The compact Timberline provides up to 5 inches of eye relief in an affordable, lightweight platform ideal for all-day grinds through brush and hilly terrain.



WATERPROOF SHOCKPROOF FOGPROOF

NITROGEN-FILLED

Series Features • Compact for easier hunting in mountainous terrain or heavy brush

ITEM NUMBER:

201344

TIMBERLINE RIFLESCOPE 4.5-14x32mm

BALLISTIC PLEX™

RETICLE:

- Up to 5 inches of eye relief keeps heavy recoiling riflescopes away from your face; perfect for muzzleloaders, slug guns, mountain rifles, and quality rimfire rifles
- Light weight and small size doesn't affect the balance and feel when mounted low on short-action rifles

MAIN TUBE SIZE:

1 in.

- Index-matched, HiLume[™] multicoating provides low-light performance and glare elimination

ADJUSTABLE PARALLAX: 7 YDS. TO INFINITY



BURRIS HANDGUN Scopes

Given handgun hunters employ some seriously impressive calibers, these exceptionally precise, durable, and reliable scopes are purpose-built with superb recoil absorption that retains scope accuracy. Multi-coated lenses max out contrast in low-light, eliminate glare and offer long eye relief appropriate for heavy recoil long range shooting.





(N₂)

WATERPROOF SHOCKPROOF

FOGPROOF

OF NITROGEN-FILLED



HANDGUN SCOPE 2x20mm

ITEM NUMBERS: 200218, 200229 RETICLE: PLEX MAIN TUBE SIZE: 1 in. Most compact and lightweight configuration in the product lineAvailable with matte black or nickel finish



HANDGUN SCOPE 2-7x32mm

ITEM NUMBERS:	ITEM NUMBERS:
200279, 200299	200291, 200298
RETICLE:	RETICLE:
BALLISTIC PLEX™	PLEX

MAIN TUBE SIZE: 1 in. Variable 2-7x magnification offers greater field versatility

• Available with matte black or nickel finish

 Available Posi-Lock[™] system (item 200299) uses a retractable steel post in addition to the springs of a conventional adjustment system, to keep the point of aim firmly in place under the harshest recoil



HANDGUN SCOPE 3-12x32mm

ITEM NUMBER: 200309

RETICLE: BALLISTIC PLEX™


MAIN TUBE SIZE:


ADJUSTABLE PARALLAX: 25 YDS. TO INFINITY Large magnification extends your long-range shooting capability
Parallax adjustment for improved accuracy at any distance



- Compact, lightweight scopes with long eye relief create the perfect platform for handgun hunting
- Double internal spring-tension system allows the scope to hold zero through shock, recoil, and vibrations
- Durable, stress-free, solid 1-piece outer tube withstands shock and vibrations of even the heaviest-recoiling calibers
- High-grade optical glass provides excellent brightness, clarity and lasting durability





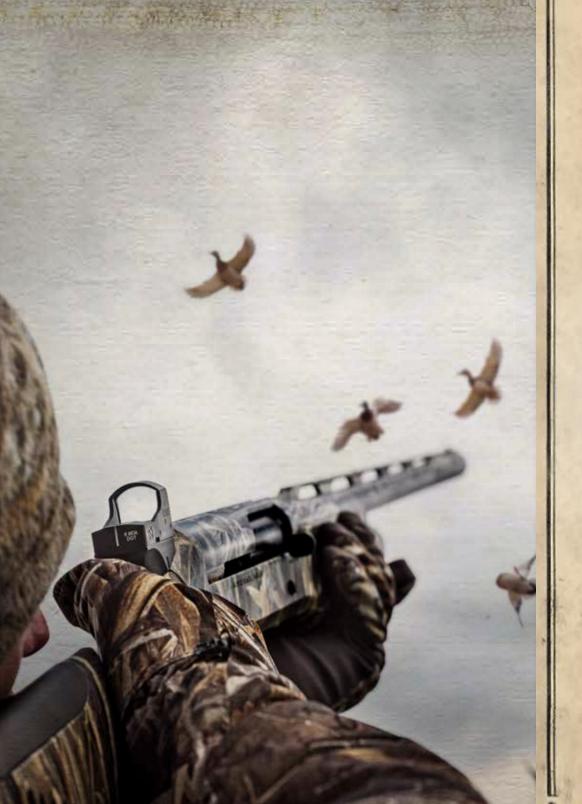

SPEEDBEAD
SHOTGUN Mounts **BURRIS**



Burris


No other system exists for mounting a FastFire[™] optic ultra-low and perfectly in line with the natural sighting plane of the shotgun. If you've never had confidence in a red dot sight's ability to improve your speed and accuracy over waterfowl, upland birds, turkeys or clays, check out this system. It'll make you a believer.

11. WATERPROOF

SHOCKPROOF

FASTFIRE™ 3 WITH SPEEDBEAD SHOTGUN MOUNT

- Includes both 8-MOA Fastfire 3 red dot sight and SpeedBead Shotgun Mount in one package
- Bright, 8-MOA red dot allows for fast target acquisition and easy aiming
- Mounts low between the stock and receiver
- Line of sight falls just above the vented rib for accurate aiming
- 1x magnification allows both-eyes-open shooting
- Parallax free, for improved accuracy
- CR-1632 battery with automatic time-out feature lasts up to 5 years
- Compatible with Shotgun Item 300240 Benelli® Super Black Eagle II 300241 12 Ga. Benelli® M2, Montefeltro, Ultra Light 300253 Beretta® A400 Xplore 300244 Beretta® Xtrema/2, 391, 391 Light, Urika/2 300245 Remington® 870 300248 Remington® 1100, 1187







SPEEDBEAD SHOTGUN MOUNTS

- SpeedBead Shotgun Mount only; FastFire optics sold separately
- Compatible with many popular shotguns
- All SpeedBead Shotgun Mounts are compatible with all FastFire red dot sight models
- Mounts between the stock and receiver

	Item	Compatible with Shotgun	ltem
	410670	Benelli® Super Black Eagle II	410686
	410671	Benelli® Super Black Eagle (original) 12ga	410683
	410672	Benelli® M2, 12 Ga., Montefeltro, Ultra Light	410684
	410673	Benelli® M1, 12 Ga.	410685
	410674	Benelli® Legacy 12 Ga., Sport II, Super Sport, Cordoba	lines
	410687	Benelli® M2 20 Ga.	Item
	410675	Benelli® SuperNova	410355
	410676	Benelli® R1, ARGO	410356
	410677	Beretta® A400 Xplore	
	410678	Speed Bead, Beretta Xtrema/2, 391, 391 Light, Urika/2	
	410679	Franchi® I-12	
	410680	Remington [®] 870	
	410681	Remington® 1100, 1187	
	410682	Stoeger® 2000, P-350	

Compatible with Shotgun Remington[®] Versa Max Stoeger® 3500 Winchester® SX3; Browning® Gold 12 Gauge Browning[®] Maxus 12 Gauge

Page 29

Description

- SpeedBead Mount Riser 1/8 in.
- SpeedBead Mount Riser 1/4 in.

Windage and elevation adjustments let you fine-tune your aiming point to the center of your shot pattern.

SpeedBead mount installs between the buttstock and receiver; works with any shim kit.

Bunnill

SpeedBead mount aligns the red dot lower than any other optic on the market, for accurate and instinctive shooting.

BINOCULARS

Hunters have trusted Burris optics for over 40 years and the new Droptine and Signature binoculars continue the tradition of reliability, affordability and performance. High-performance HD lenses and BaK prisms produce sharper images and edge-to-edge clarity. Step up your game with legendary Burris optics. Performance and reliability you can trust.



WATERPROOF

SHOCKPROOF

NITROGEN-FILLED

1

FOGPROOF

SIGNATURE HD BINOCULARS 8x42mm

ITEM NUMBER: **NEW 300292** • 8x magnification and HD glass for optimal light transmission and true color fidelity

SIGNATURE HD BINOCULARS 10x42mm

ITEM NUMBER: **NEW 300293** • These 10x binoculars are big on performance but won't slow you down

SIGNATURE HD BINOCULARS 12X50mm

ITEM NUMBER: **NEW 300294**

Features

Features

Series

- 12x magnification is the best choice for wide open country and terrain
- Large, 50mm objective gathers more light for better detail in low light
- All lenses are fully, multi-coated for maximum light transmission and reduced glare
- Versatile enough for any style of hunting
- Series Phase-corrected BaK roof prisms produce high resolution images from close up to far away
 - The open bridge design reduces weight and is comfortable to hold
- Nitrogen-filled for waterproof, fog proof performance. Outer surfaces are rubber armored for protection and a sure grip
- Includes a durable carrying case and neoprene neck strap for all-day comfort

DROPTINE BINOCULARS 8x42mm

ITEM NUMBERS: **NEW 300290** 8x magnification provides detail and a wide field-of-view

DROPTINE BINOCULARS 10x42mm

ITEM NUMBERS: **NEW 300291**

• 10x magnification is ideal for scouting eastern whitetail or western mule deer

- All lenses are fully, multi-coated for maximum light transmission and reduced glare
- Nitrogen filled for waterproof and fogproof performance in harsh weather conditions
- Full size performance in compact, light-weight package





- Rubber armored for protection and a non-slip grip
- Includes a durable carrying case and neoprene neck strap





BURRIS SPOTTING SCOPE

Take glassing to a higher level with Burris' Signature HD Spotting Scope. With a 20-60x magnification range, you can save time and boot leather by finding and evaluating trophy animals from a mountain away. The HD lenses and apochromatic lens system give you the advantage in the field by eliminating color fringing and delivering edge-to-edge resolution at any magnification.



WATERPROOF

SHOCKPROOF

NITROGEN-FILLED

Teatures

- Premium HD glass for optimum resolution and maximum light transmission under any lighting condition
- The index-matched lenses eliminate color aberrations and produce true color fidelity across the visible light spectrum
- Series Argon gas purging ensures waterproof, fog proof performance under extreme temperatures





SPOTTER SIGNATURE HD 20-60x85mm

ITEM NUMBERS: **NEW 300102** • Built-in sun shade reduces glare and protects the objective lens from rain and snow

HUNT

- Both coarse and fine focusing adjustment are possible with the forward mounted focus knob
- Eyecup can be adjusted to accommodate eyeglasses
- Lightweight, durable design with a die-cast magnesium body that is armored for greater protection in the field
- Angled eyepiece and rotating tripod mount makes it easy to use whether you're standing or prone



Page 31

Two integrated mounts will accept a FastFire red dot sight for fast, easy, aiming and target acquisition

(FastFire sold separately)



SCR™ MIL SCR™ MOA See page 64 for detailed reticle information

ITEM NUMBER: ITEM NUMBER NEW 626200 NEW 626201 RETICLE:

30x WIDE ANGLE EYEPIECE

SCR MIL

ITEM NUMBER NEW 626202 RETICLE: SCR MOA

- An optional fixed power 30x eyepiece provides even more range, detail and a wide field-of-view
- Available with your reticle choice of a SCR Mil and SCR MOA
- Easy to install

FOGPROOF





TACTICAL

MATTERS IS A PARTNER YOU CAN TRUST.

Whether it's in the face of a threat or in the face of heated competitive shooting, no tolerance exists for failure. There's far too much on the line for error, and that requires unfailing certainty and faith that your optics will help you perform and prevail when it's go time. Knowing you—and we—have done everything in our power to help that shot find its mark is what matters above all, and that starts with the name you'll see right there on your scope. That name is Burris.



It comes down to a matter of inches when a door blows open and you've got less than a second to clear a room. This is no time for chance. It's time to put absolute confidence in yourself and the crystal clear, low-magnification performance of your scope to get you out of harm's way and get both eyes on top of any target that requires attention.

SHOCKPROOF

BURRIS

MTR I

RIFLESCOPES

FOREVER WARRANTY, NO OUESTIONS ASKED * NO OUESTIONS ASKED *

Maria

COSC CONTRACTOR STATE

WATERPROOF

3

FOGPROOF NIT

NITROGEN-FILLED

N₂



XTR II RIFLESCOPE 1-5x24mm

ITEM NUMBERS: 201003 (M.A.D.) 201005 (COMBO) (M.A.D.)

RETICLE: XTR II BALLISTIC 5.56 GEN 3

MAIN TUBE SIZE: 30 MM ITEM NUMBERS: 201004 (M.A.D.) RETICLE: XTR II BALLISTIC CQ MIL Rear Focal Plane reticle design keeps the reticle size constant, so it's large enough for success with close-quarter shots, yet still performs well for mid-range shooting

 Available combo includes a complete shooting platform at significant savings: XTR II Riflescope 1-5x24mm with XTR II Ballistic 5.56 Gen 3 reticle, 3-MOA FastFire[™] 3 red dot sight, 30 mm AR-P.E.P.R.[™] mount, and Scope Tube FastFire[™] Mount; see the CQB Tactical Kits section for more information (page 41)



XTR II RIFLESCOPE 1-8x24mm

ITEM NUMBER: 201018 (M.A.D.) RETICLE: BALLISTIC CIRCLE DOT™ (FFP) ITEM NUMBER: 201019 (M.A.D.) RETICLE: BALLISTIC DOT™ (RFP)

- Provides true 1x magnification for optimal situational awareness and accurate, both-eyes-open shooting
- 8x magnification creates excellent target acquisition at longer ranges
- Select between Front or Rear Focal Plane reticle designs



MAIN TUBE SIZE: 34 MM

XTR II RIFLESCOPE 1.5-8x28mm

ITEM NUMBERS: 201013 (M.A.D.) 201015 (COMBO) (M.A.D.) RETICLE: BALLISTIC 5.56 GEN 3 ITEM NUMBERS: 201014 (M.A.D.) RETICLE: BALLISTIC CQ MIL

MAIN TUBE SIZE: 34 MM

ES FEATURES


SERI

 Dual Focal Plane reticle design allows crosshairs to change size with magnification so mil measurements and trajectory lines are accurate at any power, while the illuminated center size remains constant; allows fast, easy transition between close- and mid-distance shooting; see pages 54 and 61 for more information

 Available combo includes a complete shooting platform at significant savings: XTR II Riflescope 1.5-8x28mm with XTR II Ballistic 5.56 Gen 3 reticle, 3-MOA FastFire™ 3 red dot sight, 34 mm AR-PE.PR.™ mount, and Scope Tube FastFire™ Mount; see the CQB Tactical Kits section for more information (page 41)



- Versatile 5x or new 8x zoom system creates a large field of view at close ranges and excellent target acquisition at longer ranges
- Dimensionally matched, single-turn windage and elevation knobs have a 1/10-mil click value adjustment and Zero Click Stop
- Rear, Front, and Dual Focal Plane reticle designs allow for fast target acquisition and maximum accuracy
- 11 illuminated brightness settings span night vision, low light, and daytime visibility, with a convenient battery-saver position between each setting
- Feature the Modular Adjustment Dial (M.A.D.) System providing more accessibility and customization to windage and elevation knobs and settings

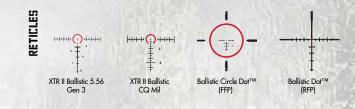

Those of us whose realities live in the 1,000-plus-yard realm know the difference between success and failure grows exponentially with every foot. It's no time for guesswork, and that's no option with features like the Five Times Zoom System and Zero Click Stop Adjustment Knobs—among many more—that allow for an epic level of shot control at distances mere mortals only dream of covering accurately.

BURRIS

XTR II**

RIFLESCOPES



Burris



N₂

WATERPROOF SHOCKPROOF

FOGPROOF

NITROGEN-FILLED

XTR II RIFLESCOPE 2-10x42mm

ITEM NUMBER: 201023	ITEM NUMBER: 201022	
RETICLE: G2B MIL-DOT™	RETICLE: SCR™ MOA	
MAIN TUBE SIZE: 34 MM	ADJUSTABLE SIDE PARALLAX: 50 YDS. TO INFINITY	

· Versatile, low-magnification scope lets you easily transition from CQB to mid-range shooting with accuracy

Versatile, combat-proven platform is ideal

• 50 mm objective allows for high

resolution and maximum light

collection

for mid- to long-range shooting 50 mm objective allows for high resolution and maximum light collection

BURRISOPTICS.COM TACTICAL

PAGE 37







ITEM NUMBER: 201033 RETICLE: G2B MIL-DOT™	ITEM NUMBER: 201031 NEW 201034 (Non-Illuminated) RETICLE: SCR™ MIL	ITEM NUMBER: 201032 RETICLE: SCR TM MOA		
MAIN TUBE SIZE: 34 MM	ADJUSTABLE SIDE PARA 50 YDS. TO INFINITY			

XTR II RIFLESCOPE 4-20x50mm

MAIN TUBE SIZE: 34 MM	ADJUSTABLE SI 50 YDS. TO I		un sa
RETICLE: G2B MIL-DOT™	RETICLE: Horus® H591™	NEW 201045 (Non-Illuminated) RETICLE: SCR™ MIL	reticle: SCR™ MOA
ITEM NUMBER: 201044	ITEM NUMBER: 201041	ITEM NUMBER: 201042	ITEM NUMBER 201043

XTR II RIFLESCOPE 5-25x50mm

ITEM NUMBER: 201053	ITEM NUMBER: 201051	ITEM NUMBER: 201052	 Popular magnification range is ideal for long-range precision shooting
RETICLE: G2B MIL-DOT ™	NEW 201056 (Flat Dark Earth) NEW 201054 (Non-Illuminated)	RETICLE: SCR™ MOA	 50 mm objective allows for high resolution and maximum light collection
and s	RETICLE: SCR™ MIL	e lisson	
MAIN TUBE SIZE: 34 MM	ADJUSTABLE SIDE PARA 50 YDS. TO INFINIT		

XTR II RIFLESCOPE 8-40x50mm

ITEM NUMBER. RETICIE 201080 F-CLASS MOA

MAIN TUBE SIZE:

34 MM

SERIES |

ADJUSTABLE SIDE PARALLAX: **50 YDS. TO INFINITY**


- High magnification is ideal for extreme long-range shooting
- 50 mm objective allows for high resolution and maximum light collection
- Features XT-80 click adjustment knob, with 80 clicks per rotation

• Versatile 5x zoom system creates a large field FEATURES of view at close ranges and excellent target acquisition at long ranges


• Zero Click Stop adjustment knobs let you quickly and easily revert back to the original zero setting without counting dicks

- XT-100 click adjustment knobs, with 10 mils or 25 MOA of adjustment per rotation, can take most tactical calibers out past 1,000 yards in a single turn
- 11 illuminated brightness settings span night vision, low light, and daytime visibility, with a convenient battery-saver position between each setting

 Front focal plane reticle design allows the reticle size to increase or decrease as magnification is increased or decreased; trajectory compensation and reticle measurements are always correct and proportional for the selected power setting

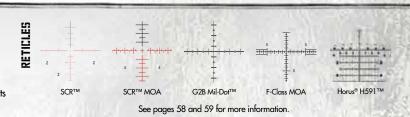









Wins in competitive shooting don't have to come with a fourfigure price tag when you outfit any competition gun with the MTAC. Tough, sleek, snag-free, and complete with the clarity of fogproof, glare-resistant glass, they're built for consistent, mid-distance, repeatable shooting with an unmatched level of features and comfort that add up to an extreme value in versatility.

BURRIS

MTAC

RIFLESCOPES

WATERPROOF

SHOCKPROOF FOG

FOGPROOF NITROGEN-FILLED



ROGEN-FILLED

(N,



PAGE 39



MTAC RIFLESCOPE 1-4x24mm

ITEM NUMBERS: 200437, 200437-FF (COMBO)

RETICLE: BALLISTIC CQ™ 200426-FF (COMBO) NEW 200457 (BLACKOUT) NEW 200465

ITEM NUMBERS:

200426,

(BLACKOUT, COMBO) NEW 200466 (SANDSTORM)

(SANDSTORM) NEW 200467 (SANDSTORM, COMBO)

RETICLE: BALLISTIC AR™ • Compact model is perfect for 3-gun, close-quarter battle (CQB), or big-game stalking

 Available combo is a complete shooting platform at significant savings: MTAC 1-4x24mm riflescope, 3-MOA FastFire™ 3 red dot sight, and 30 mm AR-P.E.P.R.™ Mount



MAIN TUBE SIZE: 30 mm





MTAC RIFLESCOPE 1.5-6x42mm

ITEM NUMBER: 200429 RETICLE: BALLISTIC CQ™ ITEM NUMBER: 200439 RETICLE: BALLISTIC AR™ Compact model is perfect for 3-gun, close-quarter battle (CQB), or big-game stalking

MAIN TUBE SIZE: 30 mm

• Ideal platform for competitive shooters, especially 3-Gun enthusiasts

- Generous eye relief up to 4 inches for comfortable shooting
- Index-matched, HiLume[™] multicoating aids in low-light performance and glare reduction, increasing your success rate



RETICLES



Every single Burris optic is covered by the Burris Forever Warranty™.



SKULLTAC[™] RIFLESCOPE 1-4x24mm

ITEM NUMBERS: 200438-FF (COMBO) RETICLE: BALLISTIC CQ™

• Top your favorite zombie carbine with this compact riflescope with SkullTac camo finish

• The combo is a complete shooting platform at significant savings: SkullTac 1-4x24mm riflescope, 3-MOA FastFire 3 red dot sight, and 30 mm AR-P.E.P.R. Mount

MAIN TUBE SIZE: 30 mm

Add some attitude to your favorite AR and stand out from the crowd with this high-performance scope wrapped in Skull-Tac[™] graphics. You can easily engage close targets or accurately aim to 600 yards to keep the zombie hordes out of your comfort zone. It's built to last until the end of days, with a rugged 30 mm tube, precision-ground optical glass, and index-matched Hi-Lume® lens coating.

BURRIS

GULTAC

RIFLESCOPES



WATERPROOF

SHOCKPROOF FOGPROOF

NITROGEN-FILLED

(N2)

• Ideal platform for competitive shooters, **SERIES FEATURES** especially 3-Gun enthusiasts

• Generous eye relief up to 4 inches for comfortable shooting

 Index-matched, HiLume[™] multicoating aids in low-light performance and glare reduction, increasing your success rate



TACTICAL

PAGE 41





RT-6 RIFLESCOPE 1-6x24mm

ITEM NUMBERS:RETICLE: NEW BALLISTIC 200472, AR™ **NEW 200475** (COMBO)

• Illuminated reticle with 11 levels of illumination

- Integrated adjustable throw lever
- Available in matt black

MAIN TUBE SIZE: 30 mm

SERIES FEATURES

***** FOREVER WARRANTY

Every single Burris optic is covered by the Burris Forever Warranty™.

three-gun competition. So if you want to compete, you better be fast on the target and fast to shoot. Race inspired and tactical strong, the new RT-6™ is built for speed, accuracy and easy handling. Guaranteed to shave seconds off the clock.

Speed reigns supreme in

TM



BURRIS

RI-G'

RIFLESCOPES

WATERPROOF

SHOCKPROOF

NITROGEN-FILLED FOGPROOF

- Shorter than most 1-4x scopes for quicker, easier handling
- The 6x zoom with true 1x setting for eyes open engagement.
- Ballistic AR[™] mil reticle with trajectory compensation out to 600 yards





BURRIS

CCIB TACTICAL KITS

Everything you need to outfit your AR, at a significant savings over buying each piece separately. You'll get high-quality sights, mounts, and the legendary Burris technology, alongside the peace of mind that comes from knowing each component is perfectly matched.

FOGPROOF

WATERPROOF

SHOCKPROOF

(N,

NITROGEN-FILLED

XTR II[™] RIFLESCOPE 1-5x24mm

ITEM NUMBERS:	Designed for serious rifle shooters—both tactical and competitive
201005	• 5x zoom system with dimensionally matched, single-turn 10-mil windage and elevation knobs with a 1/10-mil click value adjustment and
RETICLE: XTR II BALLISTIC	Zero Click Stop
5.56 GEN 3	 Rear focal plane reticle design keeps the reticle size constant, so it's large enough to be successful for close-quarter shots, and still performs well for mid-range shooting
MAIN TUBE SIZE:	0 0
30 mm	 Complete shooting platform at significant savings: XTR II Riflescope 1-5x24mm with XTR II Ballistic 5.56 Gen 3 reticle, 3-MOA FastFire[™] 3 red dot sight, 30 mm AR-P.E.P.R.[™] mount, and Scope Tube FastFire[™] Mount

XTR II[™] RIFLESCOPE 1.5-8x28mm

ITEM NUMBERS:	• Designed for serious rifle shooters—both tactical and competitive
201015	• 5x zoom system with dimensionally matched, single-turn 10-mil windage and elevation knobs with a 1/10-mil click value adjustment and
RETICLE:	Zero Click Stop
XTR II BALLISTIC 5.56 GEN 3	 Dual focal plane reticle design allows crosshairs to change size with magnification so mil measurements and trajectory lines are accurate at any power, while the illuminated center size remains constant; allows fast, easy transition between close- and mid-distance shooting
MAIN TUBE SIZE: 34 mm	Complete shooting platform at significant savings: XTR II Riflescope 1.5-8x28mm with XTR II Ballistic 5.56 Gen 3 reticle, 3-MOA FastFire 3 red dat sight 34 mm AR-PE PR mount and Scope Tube FastFire Mount

MTAC[™] RIFLESCOPE 1-4x24mm

ITEM NUMBER: 200437-FF RETICLE: BALLISTIC CQ™

NEW 200465-FF (Blackout finish) NEW 200467-FF (Sandstorm finish) RETICLE: BALLISTIC AR™

ITEM NUMBER:

200426-FF

• Ideal platform for competitive shooters, especially 3-gun enthusiasts

• Generous eye relief up to 4 inches for comfortable shooting

• Complete shooting platform at significant savings: MTAC 1-4x24mm riflescope, 3-MOA FastFire 3 red dot sight, and 30 mm AR-P.E.P.R. Mount

MAIN TUBE SIZE: 30 mm

FULLFIELD TAC30[™] RIFLESCOPE 1-4x24mm

ITEM NUMBER: 200433-FF

RETICLE: BALLISTIC CQ™ MAIN TUBE SIZE: 30 mm

• Fast-action combo designed for competitive shooters and law enforcement and military operators

• Complete shooting platform at significant savings: Fullfield TAC30 1-4x24mm, 3-MOA FastFire 3 red dot sight, and 30 mm AR-P.E.P.R. Mount

Also available as optic only; item 200433

• Time- and money-saving kits include a primary lowmagnification optic, secondary FastFire red dot sight, and rugged AR-P.E.P.R. Mount

FEATURES • Ideal for the first-time competitive shooter, or as an Бī equipment upgrade for the experienced tactical operator

- All primary optics feature illuminated reticles, which reduces time to get on target in any lighting condition and increases accuracy when the target is dark
- Tactical kits mount on any Picatinny-style rail
- · Products can be used together or individually to match your needs



RETICLES

BURRISOPTICS.COM

TACTICAL

PAGE 43



RIFLESCOPETM

AR

BURRIS



AR RIFLESCOPE 4.5-14x42mm

RETICLE:

ITEM NUMBERS: 200333 (5.56 Caliber) 200334 (7.62 Caliber)

MAIN TUBE SIZE: C4 WIND MOA™ 1 in.

ADJUSTABLE PARALLAX: **50 YDS. TO INFINITY**

• Custom tactical riflescope at an affordable price

- Ships with custom knob calibrated for either 5.56 or 7.62, to match the most popular tactical cartridges
- Receive one additional free custom elevation turret when you submit ammunition information online
- Finger-adjustable windage and elevation turrets create a sleek profile; indications always reflect a change in the point of impact for pinpoint accuracy

Given trajectory compensation is a critical component for accuracy at distance, the







With C4 technology, you see your target and windage compensating reticle with your right eye. simply refocus to your left eye and you can easily see the WindMap.

RETICLE

C4 Wind MOA™

AR Riflescopes Series has adjustment knobs specifically calibrated for holdover to match an AR's most commonly fired rounds, the 5.56 mm (.223) and 7.62 mm (.308) rounds. Think of this series as custom AR scopes durably built for ultra-accuracy-with everything except the custom scope price.



FOGPROOF

NITROGEN-FILLED

N2

- **SERIES FEATURES**
- Match elevation adjustment to your ammunition using the customized adjustment knob
 - Automatically compensates for bullet drop when you dial in yardage-totarget; no need for holdover
 - WindMap[™] helps you determine wind hold-off for your exact cartridge
- 1-MOA tick marks up to 10 MOA on each side of the reticle so you can easily compensate for wind, using the WindMap values and your own wind speed calculation Threaded Anti-Reflection Device

The C4 Wind MOA[™] reticle has

(ARD) reduces lens glare for greater concealment to prevent detection

MGR RIFLESCOPETM

BURRIS



BURRISOPTICS.COM

PAGE 45

MSR RIFLESCOPE 3-9x40mm

ITEM NUMBERS: 200137

BALLISTIC PLEXTM

MAIN TUBE SIZE: 1 in.

• Low-profile elevation knob with visible guarter-MOA clicks

RETICLE:

TACTICAL

• Available with reticle calibrated for .223 for greater accuracy with popular tactical ammunition

MSR RIFLESCOPE 4.5-14x42mm

ITEM NUMBER: 200195	RETICLE: BALLISTIC PLEX™	MAIN TU

UBE SIZE: ADJUSTABLE PARALLAX: **50 YDS. TO INFINITY**

• Low-profile elevation knob with visible guarter-MOA clicks

• High magnification extends your long-range shooting capability

• Parallax adjustment for improved accuracy at long distances

Available with reticle calibrated for .223 for greater accuracy with popular tactical ammunition



The Ballistic Plex reticle is calibrated to match popular .223 factory loads. It will match most distances within a few yards. For the most accurate calibration, visit the Ballistic Service page of the Burris website (http://ballistics.burrisoptics.com/).

- · Designed for shooters new to tactical rifles, who are ready for an affordable custom tactical riflescope
- High-grade optical glass provides excellent brightness and clarity with lasting durability

SERIES FEATURES

- Quality, precision-ground lenses are larger than those of comparable scopes, for better light collection
- Index-matched, HiLume^{**} multicoating aids in low-light performance and glare elimination, increasing your success rate
- Finger-adjustable windage and elevation turrets create a sleek profile; indications always reflect a change in the point of impact, for pinpoint accuracy



Ballistic Plex™

WATERPROOF SHOCKPROOF

And that's just the beginning.

FOGPROOF NITROGEN-FILLED

s s

Get into the black gun

world with a scope that

gets both you and your

dollar farther from the start. Note the reliable, precisionground, glare-resistant glass

that delivers excellent optical

quality. The tough, shockproof

design. Or the simple, elegant,

trajectory-compensating reticle that can

be matched to any caliber or bullet weight.

N2



mm

BURRIS

Made specifically for close-quarter engagement with an AR, these compact prism sights allow for nanosecond target acquisition in the lowest-light scenarios. The variety of magnifications also ensures lawmen, military and competitive shooters can accurately cover distances, should the situation require lightning-fast adaptability when it's go-time.



WATERPROOF SHOCKPROOF FOGPROOF NITROGEN-FILLED



• Fixed 3x magnification with a 32 mm objective

• 3 reticle color settings: red, green, and black

• Available tactical kit includes AR-332 optic,

Device, and rugged, reusable carry case

3-MOA FastFire™ 3 red dot sight, Anti-Reflection

5 red and 5 green illuminated settings

AR-332™

- ITEM NUMBERS: 300208 300222 (KIT)
- RETICLE: **BALLISTIC CQ™**
- ITEM NUMBER: NEW 300217

RETICLE **BALLISTIC 3X**



AR-TRIPLER[™]

ITEM NUMBER: 300213

- Adds 3x magnification to any 1x or non-magnified optic
- Windage and elevation adjustments allow complete use of reticle images on partner optics

ITEM NUMBER: 300216 (COMBO)

FEATURES

SERIES

- Available combo includes AR-Tripler and AR-Pivot Ring[™] Quick Detach
- Lets you transition between close-quarter and mid-distance shooting without swapping weapons or optics
- Pivot ring lets it easily flip to the side with the push of a button, to switch from 3x to 1x shooting

300210 300223 (KIT) RETICLE:

ITEM NUMBER: NEW 300218

RETICLE BALLISTIC AR



• Fixed 5x magnification with a 36 mm objective

• 3 reticle color settings: red, green, and black

• Available tactical kit includes AR-536 optic,

Device, and rugged, reusable carry case

3-MOA FastFire™ 3 red dot sight, Anti-Reflection

5 red and 5 green illuminated settings

AR-536™

ITEM NUMBERS: BALLISTIC CQT



AR-PIVOT RING™, QUICK DETACH, 30 mm

ITEM NUMBER: 420168

- Lets you quickly and easily mount the AR-Tripler in-line behind non-magnified objects
- Flips to the side with the push of a button for 1x shooting; manually pushes back into the upright position for longer shots
- Automatically locks into place for secure shooting
- Installation and removal is easy with the quickdetachable mount

RETICLES

TACTICAL

BURRISOPTICS.COM

PAGE 47



AR-1X[™]

ITEM NUMBERS: 300214 300219 (KIT)

RETICLE: BALLISTIC CQ™-1X

- Fixed 1x magnification with a 20 mm objective
- 3 reticle color settings: red, green, and black
- 7 red and 7 green illuminated settings with push-button activation
- Night vision compatible
- 5,000+ hours of battery life with one lithium AA battery
- Available tactical kit includes AR-1X optic, AR-Tripler[™], and AR-Pivot Ring[™], Quick Detach



ANTI-REFLECTION DEVICE

ITEM NUMBERS: 626004 626005

- Threaded anti-reflection devices (ARDs) reduce lens glare and provide greater concealment to prevent detection
- Available to fit AR-332 (626004) or AR-536 (626005)

- Made for competitive shooters, law enforcement personnel, and military operators
- Provides additional range from a compact, fast-acquisition optic
- Rugged construction withstands recoil, abuse and all types of weather
- Includes lens covers to protect from dirt and debris

Ballistic 3X™







Red, green, or reverts to black when battery is off. Complete reticle subtensions shown on page 66.

ITEM NUMBER: **NEW 410351**

- Locking quick-detach design is strong and allows for easy detachment
- Dependable, return-to-zero reliability



AR-Z QD MOUNT

• For use with Burris AR-536 and AR-332

BURRIS

FAGTFIRE MRED DDT SIGHTS

Light and tough, the FastFire series puts an unmistakable, bright red dot on your target to give you an immediate speed and accuracy advantage. Can be used as a primary sight or paired on top of an existing sight.





WATERPROOF SHOCKPROOF

PAGE 49





FASTFIRE 2

ITEM NUMBERS: 300232, 300233 DOT SIZE:

4 MOA

- Automatic brightness sensor adjusts brightness to match the environmental conditions
- Available with Picatinny/Weaver mount for mounting on rifles, handguns and tactical shotguns
- Black hood, when installed, puts unit into sleep mode



FASTFIRE 3

ITEM NUMBERS: 300234, 300235 DOT SIZE: 3 MOA ITEM NUMBERS: 300236, 300237 DOT SIZE: 8 MOA

- Automatic brightness sensor adjusts brightness to match the environmental conditions; also has 3 manual brightness settings
- Battery access is conveniently located on the top of the sight; automatic time-out feature after 8 hours helps battery last up to 5 years
- Available with Picatinny/Weaver mount for mounting on rifles, handguns and tactical shotguns





AR-F3[™]

DOT SIZE:

3 MOA

- ITEM NUMBER: Product includes AR-F3 tactical mount and 3-MOA FastFire 300215 3 red dot sight
 - Positions the FastFire at the optimum height on an AR as a standalone sight and as a co-witness for iron sights
 - Sight is protected by metal wings on each side
 - Has convenient storage space for spare battery, open-end wrench, and Torx® wrench
 - Fits any Weaver or Picatinny-style base

- Bright red dot allows for fast target acquisition and SERIES FEATURES easy aiming
 - 1x magnification allows for both-eyes-open shooting, for enhanced awareness and target acquisition
 - Parallax-free, for better accuracy

- Mounts to almost anything—including handguns, rifles and shotguns-and the shockproof design stands up to years of punishing recoil
- Windage and elevation adjustments make fine-tuning easy



FASTFIRE MOUNTS

ltern	Mount
410321	1911 Standard
410322	1911 Adjustable/Novak
410323	Kimber® Standard/Target/Bomar
410324	Beretta® 92 & 96/90Two/Cougar/Taurus PT99
410319	Glock 45 ACP & 10mm, + PX4 Storm
410327	Sig Sauer® P226
410328	Springfield XD®
410336	Smith & Wesson® M&P®
410318	Ruger American Pistol
410329	Ruger® Mark I, II, III
410332	Ruger® M77, No. 1, Super Redhawk, Super Blackhawk Hunter
410333	Marlin® 336, 444, 1895 (Pre-drilled and tapped)
410334	Winchester® M94 (Pre-drilled and tapped)
410335	Picatinny/Weaver
410635	Sako® Rifles (Requires Picatinny Mount # 410335)



AR-F3[™] MOUNT

ITEM NUMBER: 410348

- Simplest, most effective way to mount any FastFire sight on an AR flattop
- Allows the FastFire to mount at the optimum height, so the red dot can co-witness with iron sights
- Fits Weaver or Picatinny-style base
- Metal wings protect the lens from impact and unintentional abuse
- Lower compartment stores spare battery, open-end wrench, and Torx[®] wrench

SCOPE TUBE FASTFIRE[™] MOUNTS

ITEM NUMBERS: 410337, 410338, 410339

- Positions a FastFire sight in nearly any radial position on a primary optic
- Allows primary optic to remain at a higher magnification as you quickly switch to a FastFire sight for ultra-fast, closequarter target engagement

PICATINNY PROTECTOR MOUNT

ITEM NUMBER: 410330

- Protects any FastFire sight from impact or abuse
- Use when mounting a FastFire on pistols, rifles or shotguns, for extra protection and peace of mind
- Fits Weaver or Picatinny-style base

- Complements a high-power primary optic for long-range target acquisition and weapon alignment
- Available in 1 in., 30 mm, or 34 mm







RINGS, MOUNTS, RETICLES AND ACCESSORIES



FOR SUCCESS.



Burris has built a reputation for some of the most solid, reliable rings and bases on the market, and our quality reticles and accessories complete the perfect shooting solution. You'll stay on target round after round with gear from Burris.



BURRIS

RINGS and MOUNTS

Hunters and tactical shooters count on Burris mounting solutions, with a wide variety of options that securely mount a riflescope onto any Weaver or Picatinnystyle rail. These rings and bases provide long-lasting holding power and durability for hunters, on-duty officers and competitive shooters.



AR-P.E.P.R.™ MOUNTS

- Full ring and base mounting solution in one
- Allows up to 2 inches of forward scope positioning
- Provides optimum eye relief and full field of view
- Includes both smooth and Picatinny ring tops
- Quick-detach models allow for fast mounting

			Dimensions		-	1. 1. 1		
ltem	Size	Weight	A	В	с	D	E	Quick Detach
410341	30 mm	8.7 oz.	1.00 in.	1.75 in.	1.60 in.	4.15 in.	2.15 in.	
410342	30 mm	8.7 oz.	1.00 in.	1.75 in.	1.60 in.	4.15 in.	2.15 in.	•
410343	1 in.	8.3 oz.	1.00 in.	1.57 in.	1.50 in.	4.15 in.	2.15 in.	
410344	1 in.	8.3 oz.	1.00 in.	1.57 in.	1.50 in.	4.15 in.	2.15 in.	
410345	34 mm	6.9 oz.	0.68 in.	1.90 in.	1.35 in.	4.90 in.	2.90 in.	

2

AR-P.E.P.R.

Model

D

0 0 0

Quick-Detach

0 0 0

 \bigcirc

High

Low

Pos-Align® Offset Inserts


XTR SIGNATURE RINGS™

- Provide precision customization of cant to maximize usable elevation adjustment of the scope. Included inserts allow for 5, 10, 15, 20, 25, 30 and 40 MOA of cant
- Prevent misalignment stress on scope
- Provide 100% scope-to-ring contact, eliminating the need to lap rings while providing tremendous gripping power without leaving ring marks
- Strong, lightweight aluminum rings feature solid steel dual screw clamps that insure each ring
 mounts flat and centered on any Picatinny base
- Comes with patented Pos-Align® Offset Inserts
- Includes the following inserts: Concentric (Zero MOA), +/-5 MOA, +/-10 MOA, and +/-20 MOA (2 sets)

RING HEIGHTS

These are the dimensions of XTR Signature Rings, from the center of the scope to the top of the mount base.

ltem	Height	Size
420210	1.00 in.	34 mm
420211	1.50 in.	34 mm
420221	1.00 in.	30 mm
420222	1.25 in.	30 mm
420223	1.50 in.	30 mm
420231	1.00 in.	1 in.
420232	1.25 in.	1 in.
420233	1.50 in.	1 in.





Page 53



XTR RINGS™

- 1 in. and 30 mm models are lightweight aluminum with incredible holding power
- Quick-detach models allow fast mounting
- 34 mm models are all steel, to handle the largest scopes

ltem	Size	Quick-Detach	Aluminum	Steel	1 Ring	2-Ring Set
Low						
420160	30 mm					•
420161	30 mm		•		•	
420180	1 in.		•			•
Medium						
420157	30 mm	•	•			•
420162	30 mm		•			•
420163	30 mm		•		• *	
420181	1 in.		•			•
420185	1 in.	•	•			•
420190 - 2 Wide Rings	34 mm			•		•
420191 – 1 Thin, 1 Wide Ring	34 mm			•		•
High						
420164	30 mm		•			•
420165	30 mm		•		•	
420182	1 in.		•			•
Extra-High						
420159	30 mm	•	•			•
420166	30 mm					•
420167	30 mm		•		•	
420183	1 in.		•			•
420187	1 in.	•	•			•
420192 – 2 Wide Rings	34 mm			•		•
420193 – 1 Thin, 1 Wide Ring	34 mm			•		•
Picatinny Ring Top	- allows atte	achment of acc	essories on top	o of mounted s	cope	
420189	1 in.		•		•	

420169 30 mm

RING HEIGHTS

These are the dimensions of Xtreme Tactical Rings, from the center of the scope to the top of the mount base.

	Low	Medium	High	Extra-High
30 mm	0.85 in.	1.10 in.	1.35 in.	1.60 in.
1 in.	0.75 in.	1.00 in.	1.25 in.	1.50 in.
34 mm		1.00 in.		1.50 in.



Low



Extra-High



34 mm Steel Wide Ring



Item

410340

34 mm Steel Thin



Picatinny Ring Top

AR-T.E.R. EXTENSION RINGS

- Helps mount AR optics on short stocks
- Great for mounting a red dot sight ahead of the AR-Tripler™
- Milled from one piece of aluminum alloy, for increased strength
- Quick-detach lever for easy attachment and removal

ltem	Height	Optic Centerline Height	Length
420188	2.6 in.	1.50 in.	3.5 in.

1/2-INCH PICATINNY RISER



 Provides 1/2 inch of additional mounting height for optimal sight alignment on tactical platforms

Height

0.5 in.

SIGNATURE RINGS

and all a start and the start and

- Revolutionary Pos-Align[®] Inserts technology
- · Pos-Align Inserts guarantee perfect centering and maximum scope-to-ring contact for tremendous gripping power without damaging the scope finish
- Lets you virtually sight in your gun without moving the scope adjustments
- Corrects misalignment caused by off-center receiver holes
- Corrects for bases or rings being slightly off-center
- No need for expensive tapered bases or shimming for thousand-yard shooting
- Solid steel rings are ideal for hunting







Finish

Black Glos Matte Nickel

Black Gloss

Matte Nickel Matte Matte Matte

Signature Zee Rings

Signature Universal Dovetail Rings

ltem	Size	Height	Finish	ltem	Size	Heig
Signature U	Signature Universal Dovetail				ee Rings (We	aver-S
420501	1 in.	Medium	Matte	420520	1 in.	Mec
420511	1 in.	High	Matte	420521	1 in.	Med
420578*	30 mm	Medium	Matte	420522	1 in.	Med
420581*	30 mm	High	Matte	420530	1 in.	High
420582*	30 mm	Extra-High	Matte	420531	1 in.	High
				420532	1 in.	Hig
Signature D	ouble Dovetail			420585*	30 mm	Extr
420561	1 in.	Medium	Matte	420587*	30 mm	High
420571	1 in.	High	Matte	420588*	30 mm	Med

*30 mm comes with "zero" inserts and +/-.010 inserts for both front and rear rings.





Signature Rimfire/Airgun Rings

ltem	Size	Height	Finish
Signature Rim	fire/Airgun		
420554	1 in.	Medium	Matte
420556	1 in.	High	Matte

Comes with clamps for 11 mm and 3/8" dovetails



Pos-Align® Offset Inserts

Signatur	re Pos-Align® Offset Inserts
Installation	n Kit
626019	1 each of +/005, +/010, +/020
Gunsmith I	Kit
626024	1 each of +/005, +/010, +/020
Individual	Inserts
626017	+/010 Eccentric Offset
626018	+/020 Eccentric Offset

te de sta

RUGER®-TO-WEAVER BASE ADAPTER

- For use with Zee Rings
- Mounts optics onto Ruger® firearms that feature the proprietary Ruger® integral mounting system

ltem	Compatible with Ruger® Firearm
410990	M77®, Super Redhawk®
410991	No. 1, 77/22°, 77ML°, 77/44°, Mini-14°, Redhawk°
410992	M77® for use with Eliminator® LaserScope®



ZEE RINGS

- Tough, solid steel
- Weaver-style
- Machined to exacting tolerances to handle recoil or abuse

アントリーンにでも思想をいた

	ltem	Size	Height	Finish	Quick-Detach
	Weaver-Style				
	420031	1 in.	Low	Matte	•
	420034	1 in.	Medium	Matte	•
	420037	1 in.	High	Matte	•
	420044	30 mm	Medium	Matte	
	420077	30 mm	High	Matte	
	420079	1 in.	Low	Nickel	
	420080	1 in.	Low	Black Gloss	
	420081	1 in.	Medium	Black Gloss	
	420082	1 in.	High	Black Gloss	
	420083	1 in.	Low	Matte	
	420084	1 in.	Medium	Matte	
	420085	1 in.	Medium	Nickel	
1	420086	1 in.	High	Nickel	
1	420087	1 in.	High	Matte	

Zee Ring, Quick-Detach Model

RIMFIRE/AIRGUN RINGS

 Available in solid steel or aluminum 	Item .22 Ring Po	Size iirs (fits in :	Height 22-in. groov	Finish ved receivers)	Material	Quick-Detach
Securely mount	420069	1 in.	Medium	Matte	Steel	
your rimfire or	420072	1 in.	Medium	Black Gloss	Steel	
airgun optic	420073	1 in.	High	Black Gloss	Steel	
	420076	1 in.	High	Matte	Steel	
	420068	1 in.	Medium	Matte	Steel	•

CZ-STYLE RINGS

 Solid steel 	ŀ
Designed for	
mounting optics	
on CZ rifles	

ltem	Size	Height	Finish	Action
CZ 550				
420130	1 in.	Medium	Matte	Long-Action
CZ 527				
420140	1 in.	Medium	Matte	Short-Action



TIKKA® T3® RINGS


- Solid steel
- Ring and base solution specifically designed for Tikka® T3® rifle

Item	Size	Height	Finish
Tikka T3 Ri	ngs		
420135	1 in.	Medium	Matte
420136	30 mm	Medium	Matte
420137	30 mm	High	Matte



RING HEIGHTS

Ring Heights	Low	Medium	High	Extra-High
Signature 1 In.		0.77	0.89	
Standard 30 mm & Signature 30 mm		0.78	0.89	1.02
Zee 1 In. & Quick-Detach 1 In.	0.63	0.76	0.95	
Zee Signature 1 In.		0.77	0.92	
Zee 30 mm & Zee Signature 30 mm		0.81	0.93	1.18
CZ (All)		1.00		
.22 Signature Deluxe		0.90	1.29	
1-In22 Rings (All)		0.80	0.95	
Tikka T3		1.125	1.250	

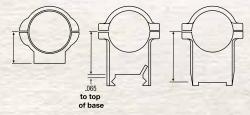

Dimensions listed are from the center line of the scope tube to the bottom of the ring.

BURRISOPTICS.COM

Page 57



XTREME TACTICAL™ 2-PIECE BASES

- Solid steel bases work with all Weaver-style, Picatinny-style, and mil-spec rings
- Engineered with minimal height and weight
- Mil-spec cross slots guarantee rock-solid attachment
- Matte finish

Burris

ltem	Style	Reversible Front Base
410600	XTB-700/7 (Remington® 700 & 7 Short & Long)	•
410605	XTB-70/Express (Winchester® 70 Short, Long & Express)	
410606	XTB-70 WSS (Winchester® 70 Short, Long & SXR)	
410615	XTB-SavR (Savage® Short & Long Round Rear)	•
410620	XTB-SavF (Savage® Short & Long Flat Rear)	
410625	XTB-ABOLT (Browning® A-Bolt Short & Long)	•
410630	XTB-TIKKA® (Tikka®)	•
410635	XTB-SAKO® Dovetail (SAKO® Dovetail Steel Base Low Profile)	

NEW XTREME TACTICAL™ 1 PIECE BASES

The new Xtreme Tactical one-piece bases offer the perfect mounting solution for precision shooters. In addition to greater strength and rigidity, the 25 MOA cant offers extended range capability.

- Milled from a single piece of solid steel
- Compatible with all Weaver-style, Picatinny-style rings
- Designed to work with both short and long actions
- Matte finish

ltem	Style	MOA Cant
NEW 410650	XTB-Sav Round Rear Long	25
NEW 410651	XTB-Sav Round Rear Short	25
NEW 410652	XTB-700 Long Action - Howa 1500 Long Action	25
NEW 410653	XTB-700 Short Action	25
NEW 410655	XTB-Howa 1500 Short Action	25
NEW 410658	XTB-TIKKA® (Tikka®)	25

HUNTING MOUNT FIT

HUNTING MOUNT FIT	VERACITY FULLFIELD E1, II DROPTINE, SCOUT TIMBERLI PREDATOR QUEST	INE VERACITY F	ULLFIELD E1, II DROPTINE, SCOUT TIMBERLINE HANDGUN PREDATOR QUEST
	2-10x-42mm 3-15x, 4-20x, 5-25x 2-7x-35mm 3-9x-40mm 4-5-14x-42mm 6-5-20x-500 4-5-14x-42mm 3-9x-40mm 4-5-14x-42mm 4-5-14x-42mm 2-75-20mm 2-75-20mm	0	3-9x-50, 3.5-10x-50 4.5-14x-42mm 6.5-20x-50mm 3-9x-40mm 4.5-14x-42mm 2.7x-32mm 4.5-14x-32mm 2.7x-32mm 2.7x-32mm 2.7x-32mm ER 3-12x-32mm ER
Base or Ring Model Gloss Matte Nickel	Ring Height Selection	Base or Ring Madel Gloss Matte Nickel	Ring Height Selection
BROWNING® A-Bolt (Long action)		RUGER® Super Redhawk	
XTB-A-Bolt Reversible (Two-piece steel tactical) 410625	M M L L M M H L L M L L L	Ruger to Weaver Adapter Base (Use Zee Rings) 410990	L L L
BROWNING® A-Bolt, Micro Medallion (Short action)		RUGER®, Super Backhawk with integral ring cuts above barrel	
XTB-A-Bolt Reversible (Two-piece steel tactical) 410625	M M L L M M H L L M L L L	Ruger to Weaver Adapter Base (Use Zee Rings) 410991	
BROWNING® A-Bolt/II, WSS Super Short Action (Including Ruger® .204 c	and newer .223)	SAKO® with dovetail receiver (Long actions)	
XTB-A-WSS Reversible (Two-piece steel tactical) 410626	M M M L M M H M L M L L L	XTB-Sako (Two-piece steel tactical) 410635 M H L L	н н к к н к к м
CZ Bolt Action Centerfire Rifles		SAKO® with dovetail receiver (Short actions)	
CZ 550 (Long Action) - 1 in., medium 420130		XTB-Sako (Two-piece steel tactical) 410635 M H L L	H H H L L H M M M
CZ 527 (Short Action) - 1 in., medium 420140		SAUER® 101 (See Remington® 700)	
HOWA® 1500, INTERARMS® 1500, MOSSBERG® 1500, S&W® 1500, 1550, 1600, 170	700 (See Remington [®] 700)	SAUER® 202	
MARLIN® XL7		XTB-SavR Rev LASA 410615 M M L L	ммнссмсс
XTB-70/Exp Reversible (Two-piece steel tactical) 410605		SAVAGE® 110, 111, 112, 114, 116 long action, standard barrel, flat rear receiver bridge	
MARLIN® XS7		XTB-SavF Reversible (Two-piece steel tactical) 410620 M M L M	M M L L M M
XTB-70/Exp Reversible (Two-piece steel tactical) 410605		SAVAGE® 10, 11, 12, 14, 16 short action, STRIKER, standard barrel, flat rear receiver bridge	
MOSSBERG® MVP, 100, ATR, 4x4, 1500, 1700 (See Remington® 700)		XTB-SavF Reversible (Two-piece steel tactical) 410620 M M L L	M M H L L M L L M M M
NOSLER® 48 (See Remington® 700)		SAVAGE® 10FP, 12 short action, Axis, rounded rear receiver bridge, new adjustable trigger sy	stem (Also Stevens® 200)
REMINGTON® 700, 721, 725, 40X (Long action) (Also fits Ruger® Round	d Receiver and many others)	XTB-SavR Reversible (Two-piece steel tactical) 410615 M M L L	M M H L L M L L M M M M
XTB-700/7 Reversible (Two-piece steel tactical) 410600	M M HL M M	SAVAGE® 110FP, 112, long action, round rear receiver bridge, new adjustable trigger system (Al	so Stevens® 200)
REMINGTON® 700, 722, 725, 40X, and 700ML muzzleloader (Short acti	ction)	XTB-SavR Reversible (Two-piece steel tactical) 410615 M M L L	M M H L L M
XTB-700/7 Reversible (Two-piece steel tactical) 410600	M M L L M M H L L M L L M	SMITH & WESSON® 1500 Rifle (See HOWA®)	
REMINGTON® 783		THOMPSON/CENTER® Venture	
XTB-SavR Rev LASA 410615	M M L L M M H L L M L L M	XTB-SavR Rev LASA 410615 M M L L	M M H L L M L L
REMINGTON® Model 7, 673, XR-100, XP-100 Repeater		ТІККА®	
XTB-700/7 Reversible (Two-piece steel tactical) 410600	M M M H L M H L L M	XTB-Tikka Reversible (Two-piece steel tactical) 410630 M H L L	H M H L L M L L
RIMFIRES - Most .22's with 3/8 grooved receiver, except Anschutz® .22,	2, Browning® T-Bolt, Kimber® 82, Weatherby® XXII,	WEATHERBY® Vanguard, X (See HOWA®)	
and Sako® 78 .22 Signature Deluxe Rings - 1 in., high 420555 420556		WINCHESTER® 70, 70A, 670, 770 non express models (Long action, serial number higher than	66,350) .860 rear mount hole spacing
.22 Signature Deluxe Rings - 1 in., medium 420554		(Also fits Marlin® M7 & Browning® Bolt BBR)	
.22 Rings Aluminum - 1 in., standard height 420071		XTB-70/Exp Reversible 410605 M M L L (Two-piece steel tactical w/ Zee Rings)	M M M L L M L L L
.22 Deluxe Steel Rings - 1 in., medium 420072 420069		WINCHESTER® 70, 70A, 670, 770 non express models (Short action, serial number higher that	n 66,350) .860 rear mount hole spacing
.22 Deluxe Steel Rings - 1 in., high 420073 420076		XTB-70/Exp Reversible (Two-piece steel tactical) 410605 M M L L	м м м L L M L L L
RUGER® American		WINCHESTER® 70, Super Short Action (Including Ruger® .204 and newer .223)	
XTB-SavR Rev LASA 410615	M M L L M H L L M L L M	XTB-70/WSS Reversible (Two-piece steel tactical) 410606 M H L L	H H L L H M L M
RUGER® Number 1, 77/22°, 77/17°, 77/44°, 77/ML°, 10/22° Mag, Min		WINCHESTER® 70 Express Post 1964 (.330 rear mount hole spacing for H&H, STW, and Ultra-	Mag magnum length action)
	hini-14° kanch, Mini 30°		M M M L L M L L M M
RUGER® M77®, Hawkeye Integral Base on receiver (Short & long actions			
Ruger to Weaver Adapter Base (Use Zee Rings) 410990	MHLMH LMHLLM		

Notes: Some rifles with heavy/varmint barrels may require one size higher rings. Fits will vary depending on gun modifications and shooting posture. XTR Rings are much higher than all other ring heights, as designated on this page.

Ring Codes L = Low Ring M = Medium Ring H = High Ring F = Front Ring R = Rear Ring XH = Extra-High Ring Law rings can be used on non-Posi-Lock™ model
 Base Codes
 LA = Long Action
 LU = Long Eye Relief Base (Dovetrail front, windage adjustable rear)
 LH = Left Hand
 REV = Reversible Front Base (.850 in. longer or shorter ring span than standard on TU- and DD-bases)

TACTICAL MOUNT FIT

Page 59



Image: Note: Control Note:				x, 1-8x	8-40x	MTAC	RT-6	'	AR		MSR		FULLF	
And the set of t				1-5x, 1.5-8x, 2-10x,	3-15x, 4-20x, 5-25x,	1-4x, 1.5-6x40mr	1-6x24mm	3-9x40mm	4.5-14x42mm	2-7×35mm	3-9x40mm	4.5-14x42mm	1-4x24mm	1-5x, 1.5-8x, 2-10x, 1-8x 1-5x, 1.5-8x, 2-10x, 1-8x 3-15x, 4.20x, 5.25x, 8-44 1-4x24mm, 1.5-5x42mm 1-6x24mm 3-9x40mm 4.5-14x42mm 4.5-14x42mm
Alteral Bookshill, Granging and Mark Mark Mark Mark Mark Mark Mark Mark	Base or Ring Model	Gloss Matte	Nickel					Ring Heig		1				Base or Ring Model Gloss Matte Nickel Ring Height Selection
Abde Beverable (were set extended) 40025 A	BROWNING® A-Bolt (Long action)													SAKO® with dovetail receiver (Long actions)
Aber Aber Aber Aber Aber Aber Aber Aber	XTB-A-Bolt Reversible (Two-piece steel tactical)	410625		м	м	м	м	L	м	L	L	м	м	XTB-Sako (Two-piece steel tactical) 410635 M H M M L H L L H
SAVAGP 10.11, 12.1 14.1 16 long action, started started, 14 cond.AAA<	XTB-A-bolt Reversible (Two-piece steel to	ctical)												SAKO® with dovetail receiver (Short actions)
Normal Second Line DecisionOrdeMM	XTB-A-Bolt Reversible (Two-piece steel tactical)	410625		м	м	м	м	L	м	L	L	м	м	XTB-Sako (Two-piece steel tactical) 410635 M H M M M M M M
MONA" 1300, MEREARMS' 1300, MOSSSEREG' 1300	BROWNING® A-Bolt, WSS Super Short Ac	tion (Including Ruge	er® .204 and	d newe	r .223)								SAVAGE® 110, 111, 112, 114, 116 long action, standard barrel, flat rear receiver bridge
Performance of the state state of the state of the state of the state of the s	XTB-A-WSS Reversible (Two-piece steel tactical)	410626		м	м	м	м	L	м	м	L	м	м	XTB-SavF Reversible (Two-piece steel tactical) 410620 M M M M M M M M M M
Alb2000/ Reversible flooppices and half will also also also also also also also al	HOWA® 1500, INTERARMS® 1500, MOSSE	ERG® 1500, S&W® 1	500, 1550,	1600,	1700	(See Re	mingte	on® 70	O)					SAVAGE® 110FP, 112, long action, round rear receiver bridge, new adjustable trigger system (Also Stevens® 200)
PRININGROMe 700, 722, 723, 743, 40x, or al Unitational State Stat	REMINGTON® 700, 721, 725, 40X (Long	action) (Also fits Rug	ger® Round	Receive	er and	many	others	5)						XTB-SavR Reversible (Two-piece steel tactical) 410615 M M M M L M L L M
MR2007 Reversible [Nor-pices and lattice]MMMMLMLMLMLMLMMM <th< td=""><td>XTB-700/7 Reversible (Two-piece steel tactical)</td><td>410600</td><td></td><td>м</td><td>м</td><td>м</td><td>м</td><td>L</td><td>м</td><td>м</td><td>L</td><td>м</td><td>м</td><td>SAVAGE® 10, 11, 12, 14, 16 short action, STRIKER, standard barrel, flat rear receiver bridge</td></th<>	XTB-700/7 Reversible (Two-piece steel tactical)	410600		м	м	м	м	L	м	м	L	м	м	SAVAGE® 10, 11, 12, 14, 16 short action, STRIKER, standard barrel, flat rear receiver bridge
Heading Group and ded 7, 67.3, XR-100,	REMINGTON® 700, 722, 725, 40X, and 7	00ML muzzleloade	r (Short acti	on)										XTB-SavF Reversible (Two-piece steel tactical) 410620 M M M M L M L L M
NR-7007 Revealed (floropice ated florid) 40000 N	XTB-700/7 Reversible (Two-piece steel tactical)	410600		м	м	м	м	L	м	L	L	м	м	SAVAGE® 10FP, 12 short action, rounded rear receiver bridge, new adjustable trigger system (Also Stevens® 200)
AMAFIRES - Most - 222 signature Delawe Rings - 1 in, high 420554 - <td< td=""><td>REMINGTON® Model 7, 673, XR-100, XP</td><td>-100 Repeater</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>XTB-SavR Reversible (Two-piece steel tactical) 410615 M M M M L M L L M</td></td<>	REMINGTON® Model 7, 673, XR-100, XP	-100 Repeater												XTB-SavR Reversible (Two-piece steel tactical) 410615 M M M M L M L L M
22 Signature Delivee Rings 1 in , high 420554 -	XTB-700/7 Reversible (Two-piece steel tactical)	410600		м	м	м	м	м	н	L	м	н	м	SMITH & WESSON® 1500 Rifle (See HOWA®)
22 Rings Aluminum - 1 in., standard height 420071 . <	RIMFIRES - Most .22's with 3/8 grooved r	receiver, except Ans	chutz® .22,	Browni	ng® T-l	Bolt, Ki	nber®	82, W	/eathe	rby® X	XII, an	d Sak	o® 78	TIKKA®
22 Delvace Steel Rings - 1 in, medium 420072 420069 • <	.22 Signature Deluxe Rings - 1 in., high	420554			•			•		•	•			XTB-Tikka Reversible (Two-piece steel tactical) 410630 M H M M L M L L M
RUGER® Number 1, 77/22°, 77/17°, 77/44°, 77/ML°, 10/22° Mag, Mini-14° Rarch, Miri 30° N	.22 Rings Aluminum - 1 in., standard height	420071			•			•		•	•			WEATHERBY® Vanguard (See HOWA®)
Rigger to Waaver Adapter Base (Use Zee Rings) 410991 M				i-14® R	• anch	Mini 30	•			•	•			
WINCHESTER® 70, 700, 670, 770 non express models (Short action, serial number higher than 66,350). 860 rear mouth hole spacing Ruger to Weaver Adapter Base (Use Zee Rings) 410990 M <td></td> <td></td> <td>,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,</td> <td>м</td> <td>н</td> <td>м</td> <td></td> <td>м</td> <td>н</td> <td>L</td> <td>м</td> <td>н</td> <td>м</td> <td>XTB-70/Exp Reversible (Two-piece stell bacical w/ Zee Kings) 410605 M M M L L M</td>			, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	м	н	м		м	н	L	м	н	м	XTB-70/Exp Reversible (Two-piece stell bacical w/ Zee Kings) 410605 M M M L L M
Ruger to Weaver Adapter Base (Use Zee Rings) 410990 M H M M H L M H L M M M M M M L M M M M M M M M M M M M M M L M M M L M M L M M L M M L M M L M L M M L L M M L L M M L L M M L L M M L L M M L L M M L L M M L L M M L L M M M L L M M M L L M M M L L M M M L L M M M L L M M M L	RUGER® M77® Integral Base on receiver (Short & Long action	s)											WINCHESTERS 70, 704, 670, 770 non-express models (Short action, sovied number higher than 66, 350), 860 year mount halo specing
WINCHESTER® 70, Super Short Action (Including Ruger® .204 and newer .223) XTB-70/WSS Reversible (Two-piece steel tactical) 410606 M H<	Ruger to Weaver Adapter Base (Use Zee Rings)	410990		м	н	м	м	м	н	L	м	н	м	
XTB-70/WSS Reversible (Two-piece steel tradical) 410606 M H M L H L H L H														
WINCHESTER® 70 Express Post 1964 (.330 rear mount hole spacing for H&H, STW, and Ultra-Mag magnum length action)														
XTB-70/Exp Reversible (Two-piece steel tactical) 410605 M M M L M M L M M														

 Base Codes
 LA = Long Action
 LU = Long Eye Relief Base

 SA = Short Action
 (Dovetail front, windage adjustable rear)

LH = Left Hand REV = Reversible Front Base (.850 in. longer or shorter ring span than standard on TU- and DD-bases)
 Base Codes
 LA = Long Action
 LU = Long Eye Relief Base

 SA = Short Action
 (Dovetail front, windage adjustable rear)

LH = Left Hand REV = Reversible Front Base (.850 in. longer or shorter ring span than standard on TU- and DD-bases)

BURRIS RETICLES

Reticles take the guesswork out of target size and distance, wind hold-off, and holdover. There's a quality Burris reticle with features for every shooting challenge.

THE RIGHT FOCAL PLANE FOR THE SHOT

FRONT FOCAL PLANE

Front focal plane (FFP) reticle design, also called first focal plane, places the reticle in front of the zoom mechanism, allowing the reticle size to increase or decrease as magnification is increased or decreased.

Trajectory compensation and reticle measurements are always correct and proportional for the selected power setting.

REAR FOCAL PLANE


Rear focal plane (RFP) reticle design, also called second focal plane, places the reticle behind the zoom mechanism so the reticle size stays constant at every magnification.


Trajectory compensation and reticle measurements will only be correct at one magnification setting (normally high power).

DUAL FOCAL PLANE

Dual focal plane (DFP) reticle design separates the center aiming point and the crosshairs of the reticle, placing the center in the RFP and the crosshairs in the FFP.

This allows the crosshairs to change size with magnification so mil measurements and trajectory lines are accurate at any power. The size of the illuminated center remains constant, for fast, easy transitions between short- and mid-distance shooting.

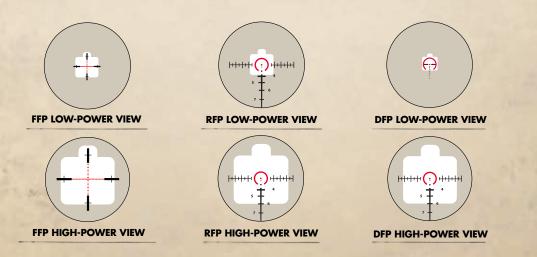


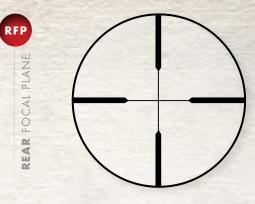

PLEX

- Simple reticle
- Thin crosshair with bolded edges is highly visible
- · Lets you zero in on animals of nearly any size





RETICLE SUBTENSIONS (in MOA)

	LC	W MA	G	н	HIGH MAG				
Model	А	В	w	А	В	w			
Fullfield II™									
3-9x40	.86	2.3	26	.31	.83	9.40			
Handgun									
2x-20	.81	2.2	25						
2-7x32	.90	2.5	28	.27	.72	8.20			
Scout™ (Heav	vy Plex	Reticle)							
2-75x20mm	.70	3.4	22						

RETICLES BURRISOPTICS.COM

M Page 61






C4 WIND MOA™

- Clean, simple reticle works perfectly with custom elevation knob and WindMap[™] on the AR Riflescope platform
- 1 MOA tick marks allow easy compensation for wind drift

DETAIL



RETICLE SUBTENSIONS (@ High Mag)

Units	A	В	с	D
4.5-14x42				
MOA	.18	.50	.50	1.0



LONG-RANGE MOA

- Increases precision for long-range competition
- Ultra-fine center area helps shooters engage targets with extreme accuracy
- MOA-based, proprietary Burris design increases detail for long-range competition without adding clutter or distraction
- Design increases speed and precision for wind hold-off, range estimation and impact measurement


DETAIL



BALLISTIC MIL-DOT


- Ideal for very flat-shooting cartridges
- Perfect choice for long-range target shooters, varmint shooters, and tactical marksmen
- Mil-dots can be used for estimating range and target size, and help compensate for wind drift

DETAIL

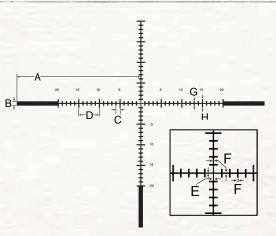


RETICLE SUBTENSIONS (in MOA)

Madel A B C D E F G H 4.5-14x42 30 1 1 5 .13 .2 1 2

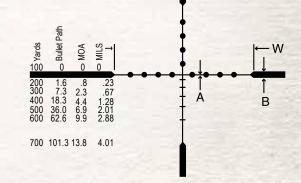

RETICLE SUBTENSIONS (in Mils; @ 20x)

Model	А	В	w
6.5-20x50	.05	.78	10

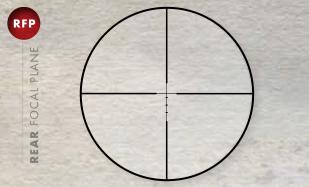


- it - Antipan

BALLISTIC PLEX

- The most simple, effective and elegant trajectorycompensating reticle
- Quick and easy to use
- Can be matched to any caliber or bullet weight for longrange accuracy

DETAIL

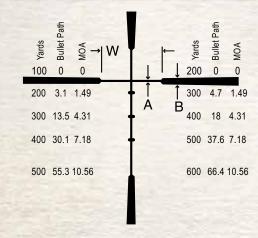


RETICLE SUBTENSIONS (in MOA)

	LO	W MA	G	HIGH MAG			
Model	А	В	w	А	В	w	
2-7x35	1.1	3.0	26	.39	1.06	9.1	
3-9×40	.86	2.3	20	.31	.83	7.1	
3-9x-50	.82	2.2	19	.29	.79	6.8	
4.5-14x-42	.58	1.6	19	.19	.52	6.2	




BALLISTIC PLEX E1[™]

- Trajectory-compensating technology and cascading dots for compensating wind drift with nearly any biggame hunting cartridge
- Dots represent hold-off for a 10 mph wind
- Simple, accurate and easy to use

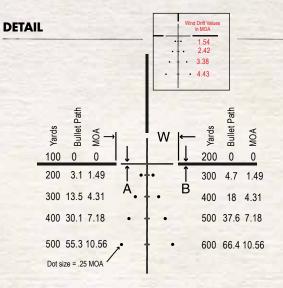

RETICLE SUBTENSIONS (in MOA)


	LC	w MA	HIGH MAG				
Model d	A	В	w	А	В	w	
2-7x35 O		3.0	26	.39	1.06	9.1	
3-9x40 5	.86	2.3	20	.31	.83	7.1	
3-9x50	.82	2.2	19	.29	.79	6.8	
4.5-14x42	.58	1.6	19	.19	.52	6.2	



BALLISTIC PLEX E1[™] MV


- Trajectory-compensating technology and cascading dots for compensating wind drift
- Dots represent hold-off for a 10 mph wind
- At 20x power setting, it's calibrated for the .22-250 cartridge; also works well with other flat-shooting cartridges
- Mil measurement tools aid in calculating distance and target size

DETAIL

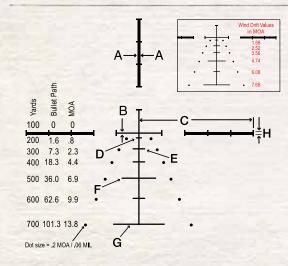

RETICLE SUBTENSIONS (in Mils)

Model	А	В	с	D	E	F	G	н
6.5-20x50	.125	.03	5	.25	.5	1.5	2.5	.25






BALLISTIC PLEX E1[™] FFP


2-10x/3-15x

4-20x/5-25x

- MOA reticle
- Trajectory compensation out to 600 yards
- Cascading dots represent a 10 mph wind hold-off
- Bold, tapered crosshairs in an FFP design make the reticle highly usable, ensuring its visibility even on low power

DETAIL



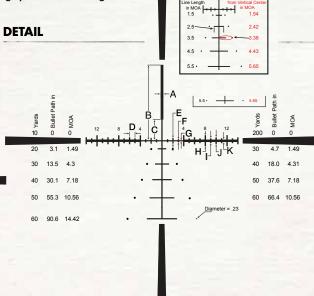

RETICLE SUBTENSIONS (in MOA)

Model	А	В	с	D	E	F	G	н
2-10x42	20	.75	.3	2	4	4	2	.3
3-15x50	20	.5	.2	2	4	4	2	.3

RETICLE SUBTENSIONS RFP (in MOA)


Model	А	В	С	D	Е	F	G	н	Т	J	к
4-20x50	.38	13	4	1	1	.5	.15	2	.8	1.2	.38
5-25×50	.35	13	4	1	1	.5	.13	2	.8	1.2	.35



BALLISTIC PLEX E1[™] FFP VARMINT

- Precision varmint reticle
- MOA tick marks for measuring distance and determining target size
- Trajectory compensation out to 700 yards
 Cascading dots represent a 10 mph wind hold-off
- Bold crosshairs in an FFP design make the reticle highly usable, ensuring its visibility even on low power

DETAIL

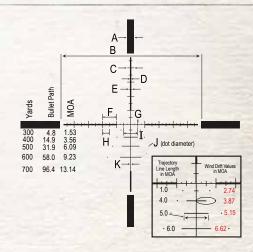

RETICLE SUBTENSIONS (in MOA)

Model	А	В	с	D	E	F	G	н	1	J	К
4-20x50	2	40	2	.38	1	4	.13	2	4	.23	.13
5-25x50	2	40	2	.30	1	4	.11	2	4	.18	.11

RETICLES

SCR[™] MIL


FFP

FRONT FOCAL PLANE

ALL LITE AL MARKED


- Mil-based, proprietary Burris design
 Increases precision for long-range competition, without adding clutter or distraction
- Extended center illuminated area (select models only) lets the shooter confidently engage targets at long distances in low light and shadowsIncreases speed and precision for wind hold-off and for range estimation
- and impact measurement



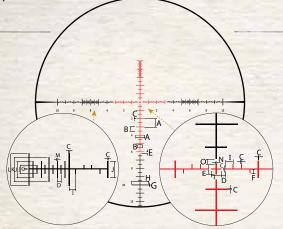


RETICLE SUBTENSIONS

CM 10 5 .35 1 2.5 1 .8 20 2 4 6 8 .2 .3 1.25 in/100/d 3.60 1.80 .13 .36 .90 .36 .29 7.20 .72 1.44 2.16 2.88 .07 .11 .45 MCA 3.44 1.72 .12 .34 .86 .34 .28 .688 .69 1.38 2.06 2.75 .07 .10 .43 3-15x50 Mile 1.00 .50 .65 .10 .25 .12 .08 200 .20 .40 .60 .80 .02 .04 .125																
Mile 100 50 0.35 10 2.5 10 0.8 2.00 2.0 4.0 6.0 80 0.2 0.3 1.25 CM 10 5 3.5 1 2.5 1 8 20 2 4 6 8 .2 3 1.25 in/100,d 3.6 1.0 1.3 3.6 9.0 3.6 2.9 7.20 7.2 1.44 2.16 2.88 .07 .11 4.5 MCA 3.44 1.72 1.2 3.4 .86 .34 .28 .688 .69 1.38 2.06 2.75 .07 .10 .43 J 15x50	Unit	А	В	С	D	E	F	G	н	Т	J	к	L	м	N	0
CM 10 5 .35 1 2.5 1 .8 20 2 4 6 8 .2 .3 1.25 in/100/d 3.60 1.80 1.3 .36 .90 .36 .29 7.20 .72 1.44 2.16 2.88 .07 .11 .45 MCA 3.44 .172 .12 .34 .86 .34 .28 .688 .69 1.38 .206 .275 .07 .10 .43 J15x50 Mile 1.00 .50 .05 .10 .25 .12 .08 .200 .20 .40 .60 .80 .02 .04 .125 Mile 1.00 .50 .55 .10 .25 .12 .88 .20 .2 .40 .60 .80 .02 .04 .125 GM .10 .5 .5 .1 .25 .125 .8 .20 .2 .4	4-20x50 and	d 5-25	x50													
in/100yd. 3.60 1.80 1.31 3.6 9.00 3.6 2.9 7.20 7.20 7.21 1.44 2.16 2.88 0.77 1.11 4.57 MCA 3.44 1.72 1.2 3.4 8.6 3.44 2.86 6.88 6.9 1.38 2.06 2.75 0.77 1.0 4.3 3.15 x50 Mile 1.00 .50 0.55 .10 2.5 1.27 0.86 2.00 2.07 4.00 6.00 0.02 0.04 1.25 OM 10 5.5 1.0 2.5 1.25 3.8 2.00 2.2 4 6 8 .4 .4 1.25 in/100yd 3.60 1.80 1.80 3.6 .90 4.55 .20 7.20 .72 1.44 2.16 2.88 .07 .14 .15	Mils	1.00	.50	.035	.10	.25	.10	.08	2.00	.20	.40	.60	.80	.02	.03	.125
MCA 3.44 1.72 1.2 3.4 8.6 3.4 2.8 6.88 6.9 1.38 2.06 2.75 0.7 1.0 4.3 3-15x50 Mik 1.00 .50 0.5 1.0 2.5 1.2 0.8 2.00 2.0 4.0 6.00 0.0 0.0 0.0 1.12 Mik 1.00 .50 0.55 .10 2.5 1.2 0.8 2.00 2.0 4.0 6.00 8.00 0.2 0.04 1.25 OM 10 5 .5 1 2.5 1.25 .8 200 2 4 6 8 .4 .4 1.25 in/100yd 360 1.80 .18 .36 .90 .45 .27 .72 .72 1.44 2.16 2.88 .07 .14 .45	CM	10	5	.35	1	2.5	1	.8	20	2	4	6	8	.2	.3	1.25
Sa-15x50 Sa-15x50 Mik 1.00 .50 .05 .10 .25 .12 .08 2.00 .20 .40 .60 .80 .02 .04 .125 OM 10 5 .5 1 2.5 .125 .8 20 2 4 .6 .8 .4 .4 .125 in/100yd 3.60 .180 .18 .36 .90 .45 .29 .720 .72 1.44 2.16 2.88 .07 .14 .45	in./100yd.	3.60	1.80	.13	.36	.90	.36	.29	7.20	.72	1.44	2.16	2.88	.07	.11	.45
Mile 1.00 .50 .05 .10 .25 .12 .08 2.00 .20 .40 .60 .80 .02 .04 .125 CM 10 5 .5 1 2.5 1.25 .8 20 2 4 6 8 .4 .4 1.25 in/100yd 3.60 1.80 .18 .36 .90 .45 .29 7.20 .72 1.44 2.16 2.88 .07 .14 .45	MOA	3.44	1.72	.12	.34	.86	.34	.28	6.88	.69	1.38	2.06	2.75	.07	.10	.43
CM 10 5 .5 1 2.5 1.25 .8 20 2 4 6 8 .4 .4 1.25 in/100pd. 360 1.80 .18 .36 .90 .45 .29 7.20 .72 1.44 2.16 2.88 .07 .14 .45	3-15x50															
in/100yd 3.60 1.80 .18 .36 .90 .45 .29 7.20 .72 1.44 2.16 2.88 .07 .14 .45	Mils	1.00	.50	.05	.10	.25	.12	.08	2.00	.20	.40	.60	.80	.02	.04	.125
	CM	10	5	.5	1	2.5	1.25	.8	20	2	4	6	8	.4	.4	1.25
MOA 3.44 1.72 .17 .34 .86 .43 .28 6.88 .69 1.38 2.06 2.75 .07 .14 .43	in./100yd.	3.60	1.80	.18	.36	.90	.45	.29	7.20	.72	1.44	2.16	2.88	.07	.14	.45
	MOA	3.44	1.72	.17	.34	.86	.43	.28	6.88	.69	1.38	2.06	2.75	.07	.14	.43

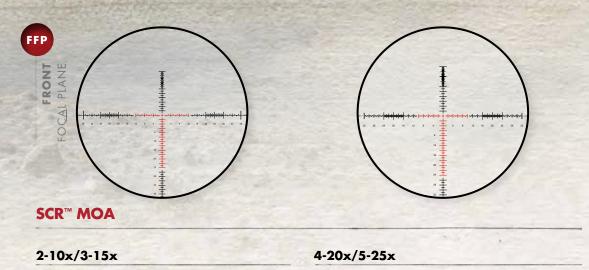

• Burris offers an MOA-based version of the SCR reticle with the same features as the SCR Mil.

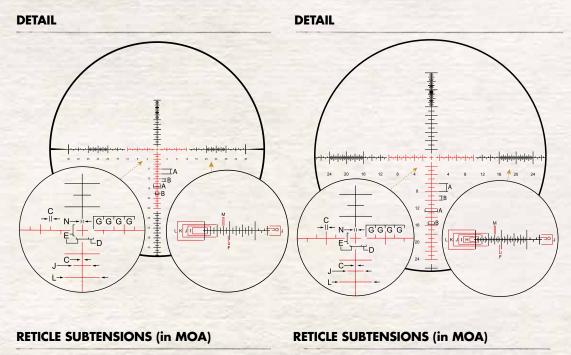


A B C D E F G H I J K L M

2 1 .12 .5 1 .25 .5 .7 1 1.5 2 3 .07 .11 .35

N O

Model	А	В	С	D	Е	F	G	н	Т	J	к	L	м	N	0	Model
2-10x / 3-15x	2	1	.17	.5	1	.5	1	-	1	1.5	2	3	.1	.15	.5	4-20x / 5-25x




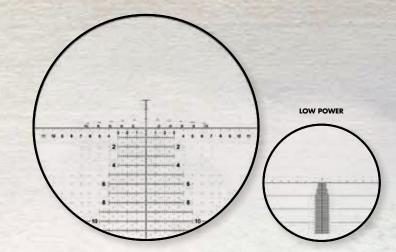


HORUS[®] H591[™]

- Detailed milradian grid pattern provides multiple hold points to make quick elevation and windage adjustments in the field
 Use the hash marks on either side of the main vertical crosshair to engage moving targets
- Rapid Range Bars let you estimate the range to common-sized targets guickly and accurately


DETAIL

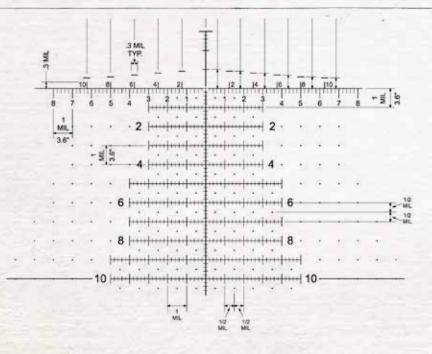

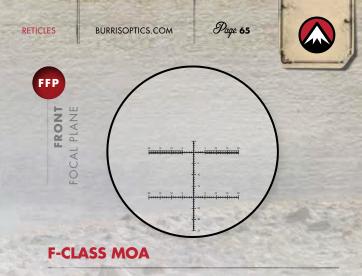

- Optimized for long-range F-Class competitive shooting
- Laid out in 0.5 MOA increments
- A secondary horizontal crosshair gives the shooter 20 MOA of additional adjustment, with the MOA hash marks for wind hold-off still visible
- Illuminated center dot at the 0, 10, 20, and 30 MOA marks

DETAIL

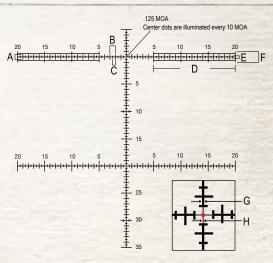

RETICLE SUBTENSIONS (in MOA)


Model	А	В	с	D	E	F	G	н
8-40x50	1	1	.5	15	.5	2	.05	.02



G2B MIL-DOT™


- Mil-based reticle with hash marks between the mil dots for more precise aiming, distance measurement, holdover and hold-off for wind
- Excellent in tactical situations when determining target distance and size is critical

DETAIL



RETICLE SUBTENSIONS


Units	А	В	с	D	E	F	G	н	J	к	L			
Mils 10 .5 .5 .2 .05 .5 1 .05 .05 5 2														
in./100 yd. 36 1.8 1.8 .72 .18 .18 3.6 .18 .18 18 7.2														
Models	-	-					34							
Droptine	4.5-1	4x42 (R	ear Foc	al Plane)										
XTR II	2-10×	42, 3-1	5x50, 4	-20x50	5-25×5	50								

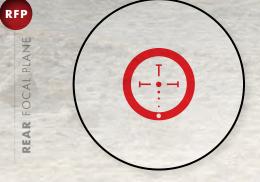

BALLISTIC CQ


- Designed for competitive shooting, law enforcement and military applications
- Circular center provides ultra-fast engagement at close distances
- Dots provide trajectory compensation out to 600 yards for popular 5.56 and 7.62

DETAIL

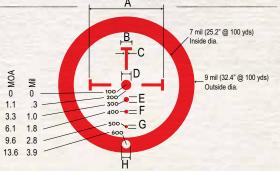

RETICLE SUBTENSIONS (in Mils)

Units	А	В	С	D	E	F	G	н
Mils	5	.75	.2	.66	.33	.25	.2	.55
Models						5.2		
Prism	AR-33	32, AR-55	56					
MTAC*	1-4x2	24, 1.5x6	×42					
*Calibration	is for high	power						




BALLISTIC 3X

- Stadia lines and center horseshoe are optimized for viewing at 3x magnification
- Fine aiming lines for elevation and windage adjustment, precise shot placement at distance • Proven broken circle design with center dot for
- ultra-fast engagement at short distances
- Center illumination is daylight bright and won't wash out in harsh light


DETAIL

RFP

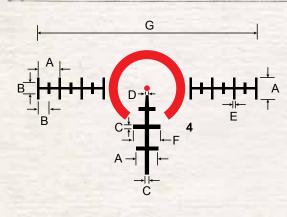

RETICLE SUBTENSIONS (in MOA)


Model	А	В	с	D	E	F	G	
AR-332	1	.50	.175	.125	.1	1.25	10	

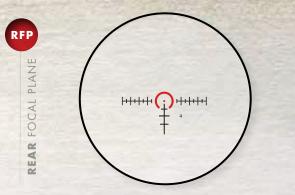

BALLISTIC AR™

- Versatile tactical reticle with milradian meaurements
- Illuminated broken circle with center dot allows for ultra-fast engagement at short distances
- Trajectory compensation out to 600 yards
- Ideal for achieving long-range accuracy with 5.56 and .223 ammunition

DETAIL

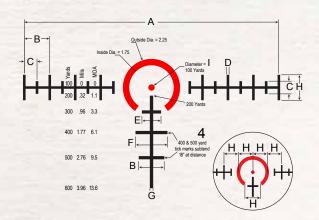


RETICLE SUBTENSIONS (in Mils)

Units	А	В	С	D	E	F	G	н	T
Mils	10	10	.5	.1	.75	1.25	.125	1	.25
Models									
Prism	AR-536								
MTAC	1-4x24, 1.5-	5x42							
RT-6	1-6x24								



- Helps shooters achieve maximum accuracy with 5.56 and .223 ammunition
- Milradian measurements and an illuminated broken circle with center dot allow for ultra-fast engagement at short distances
- Trajectory compensation allows for engagement of targets out to 1,000 yards

DETAIL

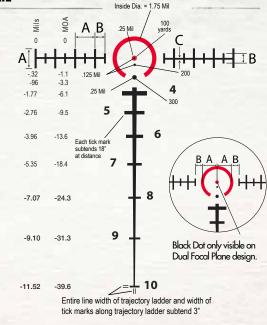

Outside Dia. = 2.25 Mil

RETICLE SUBTENSIONS (in Mils)

Model	А	В	С
1-5x24, 1.5-8x28	1	.5	.1

REAR FOCAL PLANE

Page 67


XTR II BALLISTIC CQ MIL

BURRISOPTICS.COM

RETICLES


- Tactical reticle with milradian measurements
- Illuminated broken circle with center dot allows for ultra-fast engagement at short distances
- Simple mil marks create easy holdover and wind hold-off references

DETAIL

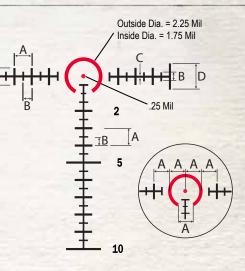

RETICLE SUBTENSIONS (in Mils)


Model	А	В	С	D
1-5x24, 1.5x8	1	.5	.1	1.5

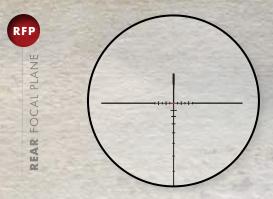



No. Contraction

- Circular center dot provides ultra-fast engagement at close distances, with trajectory compensation out to an impressive 1,000 yards • Daylight-bright illuminated center dot
- Ideal for achieving long-range accuracy with 5.56 and .223 ammunition

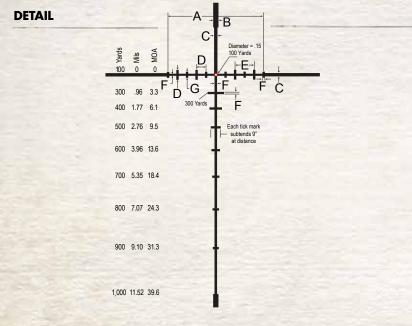




Model	A	В	с	D	E	F	G	f
1-8x24mm	5	.25	.15	.5	1 -	.1	.3	



BALLISTIC CIRCLE DOT[™]

- Versatile tactical reticle with milradian meaurements
- Illuminated circle with small center dot provides speed at low magnification and precision at high magnification
- Trajectory compensation out to 600 yards
 Ideal for achieving accuracy with 5.56 and .223 ammunition

DETAIL

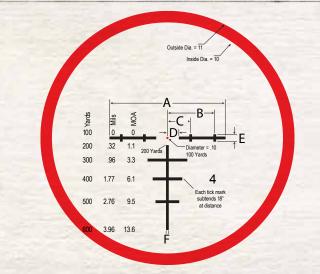

RETICLE SUBTENSIONS FFP (in Mils)

Burris





The new Burris Ballistic Services is a set of sophisticated online ballistic tools that will allow you to master any Burris ballistic compensating reticle, build a dope card, program your Eliminator riflescope, or order custom elevation and windage knobs. With our easy-to-use software, expansive cartridge and bullet libraries, and highly customizable results, the Burris Ballistic Services will turn you into a reticle expert and a pro on the shooting range.

Burris offers a wide variety of reticles, and this tool ensures you can utilize their full potential. It's easy to match your



BALLISTIC SERVICES

BurrisOptics.com/Ballistics

environment, cartridge, gun and scope to provide the exact reticle data you need. Whether you dial in a solution, or prefer an exact holdover, this tool will calculate it for you. Learn precisely where your shot will fall at any distance.

> These tool were developed with the serious shooter in mind, but it's also a great way for any novice to learn more about long-range shooting.

The Eliminator laser riflescope tool allows owners to guickly get the programming numbers they need to get the full use of their extremely advanced riflescope. And with the ballistic calculator adding in environmental factors, it's not just quicker: it's far more accurate than ever before.

World-Class Bullet Library

Ballistics really begin with your bullet. The better the bullet info, the better your results. The Burris Ballistic Services are centered around the best bullet and cartridge libraries in the business: almost 7,000 different cartridges and bullets are included from nearly every manufacturer. Rimfire, centerfire, even muzzleloader and shotgun shells are included in our comprehensive list. It contains G1 and G7 profiles, for precise accuracy.

Handloaders can start with a similar factory- produced cartridge and customize values to match your load, or simply enter all information from scratch.

PRECISE RESULTS FOR BURRIS RETICLES

Burris offers a wide variety of reticles, and this tool ensures you can utilize their full potential. It's easy to match your environment, cartridge, gun and scope to provide the exact reticle data you need. Whether you dial in a solution, or prefer an exact holdover, this tool will calculate it for you. Learn precisely where your shot will fall at any distance.









HUNTING SPECIFICATIONS

man starter of Mathematic

					1	Comments.	-		-	-	-)
Elimino	ntor® III La	serScope	[®] Series	345		11 11 10 10 10 10 10 10 10 10 10 10 10 10 1				1			_		12.00	1			2	21	X96 Reticle	
ltem	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Laser Range (Environmental conditions may limit range)	Operating Temperature	Reticle	Illumination	Focal Plane	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight [†]	Battery	Mounting Rail Length	Remote Cable Switch
3-12x44	mm		1.									2010					1000	1.20				
200120	3-12x	61 mm	44 mm	42 mm	750 yds. (non-reflective) – 1200+ yds. (reflective)	-1 <i>5</i> °F – +122°F	X96	•	RFP	Matte	33 - 9 ft.	3.5 – 4 in.	16 – 4.2 mm	1/8 MOA	50 MOA	50 MOA	Objective PA	13.5 in.	28.8 oz.	CR123A	6.9 in.	No
4-16x50	mm																					
200116	4-16x	65 mm	50 mm	42 mm	750 yds. (non-reflective) – 1200+ yds. (reflective)	-15°F – +122°F	X96	•	RFP	Matte	26 - 7 ft.	3.5 – 4 in.	12.5-3.1 mm	1/8 MOA	40 MOA	40 MOA	Objective PA	15.5 in.	30.4 oz.	CR123A	8.5 in.	No
200119	4-16x	65 mm	50 mm	42 mm	750 yds. (non-reflective) – 1200+ yds. (reflective)	-15°F - +122°F	X96	•	RFP	Matte	26 - 7 ft.	3.5 – 4 in.	12.5-3.1 mm	1/8 MOA	40 MOA	40 MOA	Objective PA	15.5 in.	30.4 oz.	CR123A	8.5 in.	Yes
*Example: 50	MOA is roughly 25	MOA in any direction	on from center																-	T		

[†]Weight includes mount and battery

Veracity™ Riflescopes Series



veracity	, Kinesco	opes sen	es		and the second sec										Dumble Hover 111	buildier lover 111	itaninini ota	at more
ltem	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Knob Style – Elevation & Windage*	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight
2-10x42	nm																	
200621	2-10x	49.5 mm	42 mm	44.25 mm	Ballistic Plex E1™ FFP	FFP	30 mm	Matte	52 - 10.5 ft.	3.50 - 4.25 in.	31 – 4.2 mm	1/4 MOA	MAD/LC	70 MOA	40 MOA	Side focus/PA	13.5 in.	22.7 oz.
3-15x50	nm																	
200636	3-15x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP	FFP	30 mm	Matte	36 - 7.5 ft.	3.50 - 4.25 in.	16 – 3.3 mm	1/4 MOA	MAD/LC	70 MOA	40 MOA	Side focus/PA	14.1 in.	25.2 oz.
4-20x50	nm																	
200640	4-20x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP Varmint	FFP	30 mm	Matte	26 - 5.5 ft.	3.50 - 4.25 in.	12 - 2.5 mm	1/4 MOA	TC/Z	70 MOA	40 MOA	Side focus/PA	15.0 in.	27.2 oz.
200641	4-20x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP	FFP	30 mm	Matte	26 - 5.5 ft.	3.50 - 4.25 in.	12 – 2.5 mm	1/4 MOA	MAD/LC/Z	70 MOA	40 MOA	Side focus/PA	15.0 in.	27.2 oz.
5-25x50	nm																	
200650	5-25x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP Varmint	FFP	30 mm	Matte	21 - 4.3 ft.	3.50 - 4.25 in.	10 – 2.0 mm	1/4 MOA	TC/Z	64 MOA	30 MOA	Side focus/PA	16.4 in.	28.2 oz.
200651	5-25x	58 mm	50 mm	44.25 mm	Ballistic Plex E1™ FFP	FFP	30 mm	Matte	21 - 4.3 ft.	3.50 - 4.25 in.	10 – 2.0 mm	1/4 MOA	MAD/LC/Z	64 MOA	30 MOA	Side focus/PA	16.4 in.	28.2 oz.
200652	5-25x	58 mm	50 mm	44.25 mm	SCR™ MOA	FFP	30 mm	Matte	21 - 4.3 ft.	3.50 - 4.25 in.	10 – 2.0 mm	1/4 MOA	MAD/LT/Z/E	64 MOA	30 MOA	Side focus/PA	16.4 in.	28.2 oz.
*Example: 50 /	MOA is roughly 25	MOA from center																


Ballistic Plex E1™ FFP Ballistic Plex E1™ FFP Varmint SCR™ MOA

I

*Knob Style Codes MAD = M.A.D. System LC = Low, Capped Knob LT - Low, Single-Turn Tactical Knob TC - Tall, Capped Knob TT - Tall, Multi-Turn Tactical Knob Z - Zero Click Stop E - Extra Low, Capped Knob (included in box)

Knob Styl	e Codes M	AD = M.A.D. System	m LC = Low, Cap	pped Knob LT	- Low, Single-Turn Tactical Knob	TC - Tall, C	Capped Knob T	T - Tall, Mult	i-Turn Tactical Knob Z -	Zero Click Stop	E - Extra Low, Capper	d Knob (included ir	ı box)				
		1.5) (
							-								-) (+- :=:	:	
					-	Chinese			-						$/ \langle \cdot + \rangle$	·. / \	
					A DESCRIPTION OF THE OWNER OWNER OF THE OWNER OWNER OF THE OWNER OWNER OF THE OWNER OWNE OWNER OWNE	-	- 8	_	The subsetue					\smile	L	-	Ŀ
ullfield	E1 [™] Rifles	scopes Serie	es			-	-	-	A DESCRIPTION OF TAXABLE PARTY.					Ballistic Plex E1 ⁺	™ Ballistic Plex E	1™ MV	Long-Range MOA
		Objective End	Clear Objective	Ocular End		Focal Plane			Field of View (Low to High,		Exit Pupil	-	Elevation Adjustment,	Windage Adjustment,			
ltem	Magnification	Diameter	Diameter	Diameter	Reticle	Plane	Main Tube Size	Finish	@ 100 yds.)	Eye Relief	(Low to High)	Click Value	Total Capability*	Total Capability*	Parallax/Focus	Length	Weight
2-7x35m	m																
200317	2-7x	41 mm	35 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Matte	45-13 ft.	3.1-4.1 in.	17-5 mm	1/2 MOA	60 MOA	60 MOA		11.4 in.	12.0 oz.
3-9x40m	m																
200320	3-9x	48 mm	40 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Matte	33-13 ft.	3.1-3.4 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in.	13.0 oz.
200322	3-9x	48 mm	40 mm	39 mm	Ballistic Plex E1™, Illum.	RFP	1 in.	Matte	33-13 ft.	3.1-3.4 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in.	13.0 oz.
3-9x50m	m																
200330	3-9x	57 mm	50 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Matte	30-11 ft.	3.1-3.8 in.	17-5.6 mm	1/4 MOA	50 MOA	50 MOA		13.1 in.	17.0 oz.
4.5-14x4	2mm																
200338	4.5-14x	51.5 mm	42 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	40 MOA	40 MOA	Side Focus/PA	12.6 in.	15.3 oz.
200344	4.5-14x	51.5 mm	42 mm	39 mm	Long-Range MOA	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	40 MOA	40 MOA	Side Focus/PA	12.6 in.	15.3 oz.
6.5-20x5	Omm																
200341	6.5-20x	63 mm	50 mm	39 mm	Ballistic Plex E1™ MV	RFP	1 in.	Matte	18-6 ft.	3.1-3.6 in.	7.6-2.5 mm	1/4 MOA	30 MOA	30 MOA	Side Focus/PA	14.0 in.	16.9 oz.
*Example: 50	MOA is roughly 25 M	OA in any direction from	center														







ruimeic	i i kiriesco	pes series		-													
Item	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight
2-7x35m	m																
200123	2-7x	41 mm	35 mm	39 mm	Ballistic Plex™	RFP	1 in.	Matte	45-13 ft.	3.1-4.1 in.	17-5 mm	1/2 MOA	60 MOA	60 MOA		11.4 in.	12.0 oz.
3-9x40m	m																
200161	3-9x	48 mm	40 mm	39 mm	Plex	RFP	1 in.	Matte	33–13 ft.	3.1-3.4 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in.	13.0 oz.
200162	3-9x	48 mm	40 mm	39 mm	Ballistic Plex™	RFP	1 in.	Matte	33–13 ft.	3.1-3.8 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in.	13.0 oz.
200169	3-9x	48 mm	40 mm	39 mm	Ballistic Plex™	RFP	1 in.	Nickel	33–13 ft.	3.1-3.4 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in.	13.0 oz.
4.5-14x4	2mm																
200183	4.5-14x	56 mm	42 mm	39 mm	Ballistic Plex™	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	40 MOA	40 MOA	Objective PA	13.0 in.	18.0 oz.
6.5-20x5	i0mm																
200193	6.5-20x	63 mm	50 mm	39 mm	Ballistic Mil-Dot	RFP	1 in.	Matte	18-6 ft.	3.1-3.6 in.	7.6-2.5 mm	1/4 MOA	30 MOA	30 MOA	Objective PA	14.5 in.	19.0 oz.
*E	NOA :	A in mus dimetion from															-

*Example: 50 MOA is roughly 25 MOA in any direction from center

Eulfield™ II Diflossons

Predator	Quest [®] Rif	lescopes S	eries				22										Ballistic Plex E1 ^T
Item	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length†	Weight
2-7x35mm																	
200367	2-7x	41 mm	35 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Matte	45-13 ft.	3.1-4.1 in.	15-5 mm	1/2 MOA	60 MOA	60 MOA		12.0 in.	12.0 oz.
3-9x40mm																	
200364	3-9x	48 mm	40 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Matte	33–13 ft.	3.1-3.8 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.8 in.	13.0 oz.
200365	3-9x	48 mm	40 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Camo	33-13 ft.	3.1-3.8 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.8 in.	13.0 oz.
4.5-14x42n	nm																
200370	4.5-14x	51.5 mm	42 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	40 MOA	40 MOA	Side focus/PA	13.4 in.	15.3 oz.
200371	4.5-14x	51.5 mm	42 mm	39 mm	Ballistic Plex E1™	RFP	1 in.	Camo	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	40 MOA	40 MOA	Side focus/PA	13.4 in.	15.3 oz.

[†]Length includes ARD



	/	_			/	ſ	ŀ	_
~			-1			 		

Plex™	G2B Mil-Dot™

Droptine	Riflescop	es Series		8 H											Ballist	ic Plex ^{1M}	G2B Mil-Dof™
ltern	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight
2-7x35mm																	
200015	2-7x	41 mm	35 mm	39 mm	Ballistic Plex™ .22LR	RFP	1 in	Matte	45-13 ft.	3.1-4.1 in.	17-5 mm	1/2 MOA	60 MOA	60 MOA		11.4 in.	12.0 oz.
200016	2-7x	41 mm	35 mm	39 mm	Ballistic Plex™ Slug Gun	RFP	1 in.	Matte	45-13 ft.	3.1-4.1 in.	17-5 mm	1/2 MOA	60 MOA	60 MOA		11.4 in.	12.0 oz.
3-9x40mm																	
200017	3-9x	48 mm	40 mm	39 mm	Ballistic Plex™	RFP	1 in.	Matte	33–13 ft.	3.1-3.8 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in.	13.0 oz.
200019	3-9x	48 mm	40 mm	39 mm	Ballistic Plex™.22LR	RFP	1 in.	Matte	33–13 ft.	3.1-3.8 in.	13-5 mm	1/4 MOA	50 MOA	50 MOA		12.2 in.	13.0 oz.
3-9x50mm																	
200049	3-9x	57 mm	50 mm	39 mm	Ballistic Plex™	RFP	1 in.	Matte	30-11 ft.	3.1-3.8 in.	17-5.6 mm	1/4 MOA	50 MOA	50 MOA		13.1 in.	17.0 oz.
4.5-14x42	mm																
200077	4.5-14x	56 mm	42 mm	39 mm	Ballistic Plex™	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	40 MOA	40 MOA	Objective PA	13.0 in.	18.0 oz.
200078	4.5-14x	56 mm	42 mm	39 mm	G2B Mil-Dot™	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	40 MOA	40 MOA	Objective PA	13.0 in.	18.0 oz.
*Example: 50 MC	A is roughly 25 MOA	in any direction from	center														

HUNTING SPECIFICATIONS



Scout R	iflescopes a	Series		C. C. C.	-	-	_				Contract.		Starting -	1 2 2 2 2 2	Heavy Plex	Ballistic Plex™
ltern	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (@ 100 yds.)	Eye Relief	Exit Pupil	Click Value (@ 100 yds.)	Elevation Adjustment, Total Capability (@ 100 yds.)*	Windage Adjustment, Total Capability (@ 100 yds.)*	Lengt	h Weight
2-7x32m	m		200												1.0	
200261	2-7x	39 mm	32 mm	38 mm	Ballistic Plex™	RFP	1 in.	Matte	23 ft. low - 8 ft. high	9.2-12 in.	16 mm low-4.6 mm high	1/4 in.	66 in.	66 in.	9.7	in. 13.0 oz.
2.75×20	mm															
200269	2.75x	27 mm	20 mm	35 mm	Heavy Plex	RFP	1 in.	Matte	15 ft .	7.3 in.	7.3 mm	1/2 in.	140 in.	140 in.	9.2	in. 7.0 oz.
*Example: 50	MOA is roughly 25 MO	A in any direction from	center													

					all.	-6-	- 65										
Timberli	ne [™] Riflesc	opes Serie	s			_						1		1		Ballis	stic Plex™
ltern	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability (@ 100 yds.)*	Windage Adjustment, Total Capability (@ 100 yds.)*	Parallax/Focus	Length	Weight
4.5-14x32	2mm																-
201344	4.5-14x	45 mm	32 mm	39 mm	Ballistic Plex™	RFP	1 in.	Matte	17-6.3 ft.	3.75-5 in.	7.1-2.3 mm	1/8 MOA	30 in.	30 in.	Objective PA	11.3 in.	15.0 oz.
*Example: 50 M	OA is roughly 25 MOA	in any direction from	center													/	T


*Example: 50 MOA is rough	25 MOA in any direction	n from center

	\bigcap	
)	(

						0		. Ann	and the second second								$\mathbf{\nabla}$
Handg	un Scopes	Series				_	_								Ple	x	Ballistic Plex™
ltern	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (@ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value (@ 100 yds.)	Elevation Adjustment, Total Capability (@ 100 yds.)*	Windage Adjustment, Total Capability (@ 100 yds.)*	Parallax/Focus	Length	Weight
2x20mm	n																
200218	2x	27 mm	20 mm	35 mm	Plex	RFP	1 in.	Matte	21 ft.	10-24 in.	10 mm	1/2 in.	80 in.	80 in.		8.9 in.	7.0 oz.
200229	2x	27 mm	20 mm	35 mm	Plex	RFP	1 in.	Nickel	21 ft.	10-24 in.	10 mm	1/2 in.	80 in.	80 in.		8.9 in.	7.0 oz.
2-7x32r	nm																
200279	2-7x	39 mm	32 mm	38 mm	Ballistic Plex™	RFP	1 in.	Matte	21 ft. low -7 ft. high	11–21 in. Low 10–14 in. High	16-4.6 mm	1/4 in.	64 in.	64 in.		9.7 in.	13.0 oz.
200291	2-7x	39 mm	32 mm	38 mm	Plex	RFP	1 in.	Matte	21 ft. low-7 ft. high	11–21 in. Low 10–14 in. High	16-4.6 mm	1/4 in.	64 in.	64 in.		9.7 in.	13.0 oz.
200298	2-7x	39 mm	32 mm	38 mm	Plex	RFP	1 in.	Nickel	21 ft. low-7 ft. high	11–21 in. Low 10–14 in. High	16-4.6 mm	1/4 in.	64 in.	64 in.		9.7 in.	13.0 oz.
200299	2-7x	39 mm	32 mm	38 mm	Ballistic Plex™/Posi-Lock™	RFP	1 in.	Matte	21 ft. low-7 ft. high	11–21 in. Low 10–14 in. High	16-4.6 mm	1/4 in.	64 in.	64 in.		9.7 in.	13.0 oz.
3-12x32	2mm																
200309	3-12x	44 mm	32 mm	38 mm	Ballistic Plex™	RFP	1 in.	Matte	14ft. low - 4ft. high	10–19 in. Low 10–12.5 in. High	11-2.7 mm	1/8 in.	28 in.	28 in.	Objective PA	10.8 in.	16.0 oz.
*Example: 50) MOA is roughly 25 M	OA in any direction fro	om center														



00





8 MOA Dot



FastFire[™] 3 with SpeedBead[™] Shotgun Mount

ltem	Magnification	Clear Objective Diameter	Reticle	Reticle Color	Illumination	Finish	Mount	Eye Relief	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight	Battery
Benelli S	uper Black Eagle	II 12 Gauge				1.1								-	
300240	1.07x	21x15 mm	8 MOA Dot	Red	•	Matte	Benelli Super Black Eagle II 12 Gauge	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.9 oz.	CR1632
Includes ma	ount and FastFire 3														
Benelli N	12, Montefeltro,	and Ultra Light 12 Ga	auge												
300241	1.07x	21x15 mm	8 MOA Dot	Red	•	Matte	Benelli M2, Montefeltro, Ultra Light 12 Gauge	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.9 oz.	CR1632
Includes ma	ount and FastFire 3														
Beretta®	Xtrema/2, 391,	391 Light, and Urika	ı/2 12 Gauge												
300244	1.07x	21x15 mm	8 MOA Dot	Red	•	Matte	Beretta® Xtrema/2, 391, 391 Light, Urika/2 12 Gauge	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.9 oz.	CR1632
Includes ma	ount and FastFire 3														
Remingte	on® 870 12 Gaug	je													
300245	1.07x	21x15 mm	8 MOA Dot	Red	•	Matte	Remington® 870 12 Gauge	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.9 oz.	CR1632
Includes ma	ount and FastFire 3														
Remingt	on® 1100 and 11	87													
300248	1.07x	21x15 mm	8 MOA Dot	Red	•	Matte	Remington® 1100/1187	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.9 oz.	CR1632
Includes ma	ount and FastFire 3														
Beretta®	A400 Xplor														
300253	1.07x	21x15 mm	8 MOA Dot	Red	•	Matte	Beretta® A400 Xplor	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.9 oz.	CR1632
Includes ma	ount and FastFire 3														
*Example: 50	MOA is roughly 25 MOA	from center													



Droptine®	Binocular	Series			1									
ltern	Magnification	Objective Diameter	Focus System	Optics System	Close Focus (feet)	Exit Pupil (mm)	Eye Relief (inches)	IP Distance Range (mm)	Field of View (Low to High, @ 1000 yds.)	Eyecups	Waterproof Depth	Weight (oz.)	Dimensions (in.)	
8x42mm														
300290	8x	42mm	Fast Focus	Roof Prism	7	5.25	0.72	57-74	340	Adjustable, Aluminum	1 meter	20.1	5.6x4.8x2.0	
10x42mm														
300291	10x	42mm	Fast Focus	Roof Prism	7	4.20	0.65	57-74	300	Adjustable, Aluminum	1 meter	20.1	5.6x4.8x2.0	

*Example: 50 MOA is roughly 25 MOA in any direction from center



Signatur	e HD® Bino	cular Seri	es											
ltern	Magnification	Objective Diameter	Focus System	Optics System	Close Focus (feet)	Exit Pupil (mm)	Eye Relief (inches)	IP Distance Range (mm)	Field of View (Low to High, @ 1000 yds.)	Eyecups	Waterproof Depth	Weight (oz.)	Dimensions (in.)	
8x42mm														
300292	8x	42mm	Fast Focus	HD Roof Prism	8.2	5.25	0.77	57-74	330	Adjustable, Aluminum	1 meter	23.2	5.8x5.0x2.0	
10x42mm														
300293	10x	42mm	Fast Focus	HD Roof Prism	8.2	4.20	0.61	57-74	314	Adjustable, Aluminum	1 meter	23.2	5.8x5.0x2.0	
12x50mm														
300294	12x	50mm	Fast Focus	HD Roof Prism	13.1	4.16	0.61	57-74	251	Adjustable, Aluminum	1 meter	24.3	6.5x5.1x2.3	
*Example: 50 MC	A is roughly 25 MOA i	n any direction from	center											

TACTICAL SPECIFICATIONS

	Riflesco	pes Seri	es							and statements	XTR II Ballistic 556 C	Gen 3 XTR II Ballistic	CQ Mil G2B Mil-Dot™	SCR™ M	IL SCR	™ MOA F-Cla	ss MOA Horus®	H591™ Ballis	tic Circle Dot [™]	M Ballis	stic Dot ^{TI}
	e l'éla	 Objective End 	Clear Objective	Ocular End	18		Focal	Main Tube		Field of View (Low to High,	022	Exit Pupil	· · · · ·	Knob Style -	Knob Style -	Elevation Adjustment,	Windage Adjustment, Total Capability*		1	6.35	
m •5x24n	Magnification	Diameter	Diameter	Diameter	Reticle	Illumination	Plane	Size	Finish	@ 100 yds.)	Eye Relief	(Low to High)	Click Value	Elevation*	Windage*	Total Capability*	Capability*	Parallax/Focus	Length	Weight	Batter
1003	1-5x	30 mm	24 mm	44.25 mm	XTR II Ballistic 5.56 Gen 3		RFP	30 mm	Matte	108-21.5 ft.	3.5-4.25 in.	12-4.8 mm	1/10 mil	MAD/LT/Z/E	MAD/LC/Z	26.2 Mils/90 MOA	26.2 Mils/90 MOA	Canton -	11.3 in.	21.1 oz.	CR
1004	1-5x	30 mm	24 mm	44.25 mm	XTR II Ballistic CQ Mil		RFP	30 mm	Matte	108-21.5 ft.	3.5-4.25 in.	12-4.8 mm	1/10 mil	MAD/LT/Z/E		26.2 Mils/90 MOA	26.2 Mils/90 MOA		11.3 in.	14. 1	CR
1.1	m Tactical	a production of the	24 mm	44.23 mm	ATK II Ballisic CQ Mil	•	NIF	30 mm	Malle	100-21.311.	5.5 - 4.25 m.	12-4.0 mm	1/1011	MAD/LI/Z/L	WAD/LC/Z	20.2 Mills/ 70 Millia	20.2 Wills/ 70 MOA		11.5 m.	21.1 oz.	Cr
005	1-5x	30 mm	24 mm	44.25 mm	XTR II Ballistic 5.56 Gen 3	•	RFP	30 mm	Matte	108-21.5 ft.	3.50 - 4.25 in.	12-4.8 mm	1/10 mil	MAD/LT/Z/E	MAD/IC/Z	26.2 Mils/90 MOA	26.2 Mils/90 MOA	and the second	11.3 in.	30.0 oz.	CR
1.1	1.0.0				Scope Tube FastFire™ Mount															atto:	-
3x24n		e, rusi ne - 5,	AKTLLIK	moorn, and									-				18			ANS	
1018		34 mm	24 mm	44.25 mm	Ballistic Circle Dot	•	FFP	34 mm	Matte	105 – 12.5 ft.	3.50 - 4.00 in.	12-3 mm	1/10 mil	MAD/LT/Z/E	MAD/LC/Z	30 Mil/103 MOA	30 Mil/103 MOA		10.75 in.	24.4 oz.	CR
1019	1-8x	34 mm	24 mm	44.25 mm	Ballistic Dot		RFP	34 mm	Matte	105 – 12.5 ft.	3.50 - 4.00 in.	12-3 mm	1/10 mil	MAD/LT/Z/E	MAD/LC/Z	30 Mil/103 MOA	30 Mil/103 MOA		10.75 in.	24.4 oz.	CR
5-8x2	mm	12.													11518	10111 1			14		N
01013	1.5-8x	34 mm	28 mm	44.25 mm	XTR II Ballistic 5.56 Gen 3	•	DFP	34 mm	Matte	65–13.3 ft.	3.75 - 4.00 in.	12-3.5 mm	1/10 mil	MAD/LT/Z/E	MAD/LT/Z/E	26.2 Mils/90 MOA	26.2 Mils/90 MOA	Side focus/PA	12.8 in.	23.5 oz.	CR
1014	1.5-8x	34 mm	28 mm	44.25 mm	XTR II Ballistic CQ Mil	•	DFP	34 mm	Matte	65–13.3 ft .	3.75 - 4.00 in.	12-3.5 mm	1/10 mil	MAD/LT/Z/E	MAD/LT/Z/E	26.2 Mils/90 MOA	26.2 Mils/90 MOA	Side focus/PA	12.8 in.	23.5 oz.	CR
5-8x2	mm Tactic	al Kit		1.							0.0015				S. A. al						
1015	1.5-8x	34 mm	28 mm	44.25 mm	XTR II Ballistic 5.56 Gen 3	•	DFP	34 mm	Matte	65–13.3 ft .	3.75 - 4.00 in.	12-3.5 mm	1/10 mil	MAD/LT/Z/E	MAD/LT/Z/E	26.2 Mils/90 MOA	26.2 Mils/90 MOA	Side focus/PA	12.8 in.	31.8 oz.	CF
tical Kit	ncludes scope	e, FastFire™ 3,	AR-P.E.P.R.	™ Mount, and	Scope Tube FastFire™ Mount	+									lo in the		1 190	122	2.31	S.	
10x42					1. 11 - B.	100			1						11 20	and been	1	1000			
01022	2-10x	49.5 mm	42 mm	44.25 mm	SCR™ MOA	1	FFP	34 mm	Matte	52-10.5 ft.	3.50 – 4.25 in.	12-4.2 mm	1/4 MOA; 100-click knob	π/z	π/z	90 MOA	55 MOA	Side focus/PA	13.5 in.	22.7 oz.	CR
1023	2-10x	49.5 mm	42 mm	44.25 mm	G2B Mil-Dot™		FFP	34 mm	Matte	52-10.5 ft.	3.50 - 4.25 in.	12-4.2 mm	1/10 mil; 80-click knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	Side focus/PA	13.5 in.	22.7 oz.	CR
15x50 1031	mm 3-15x	58 mm	50 mm	44.25 mm	SCR™ MIL		FFP	34 mm	Matte	36-7.5 ft.	3.50 - 4.25 in.	16-3.3 mm	1/10 mil; 100-click knob	π/z	π/z	32 Mils/110 MOA	16 Mils/55 MOA	Side focus/PA	14.1 in.	30.9 oz.	CR
80 - E				1. 28.2						11000					and the second					13	
01032	3-15x	58 mm	50 mm	44.25 mm	SCR™ MOA		FFP	34 mm	Matte	36-7.5 ft.	3.50 – 4.25 in.	16-3.3 mm	1/4 MOA; 100-click knob	π/z	π/z	110 MOA	55 MOA	Side focus/PA	14.1 in.	30.9 oz.	CR
01033	3-15x	58 mm	50 mm	44.25 mm	G2B Mil-Dot™		FFP	34 mm	Matte	36-7.5 ft.	3.50 – 4.25 in.	16-3.3 mm	1/10 mil; 100-click knob	π/z	π/z	32 Mils/110 MOA	16 Mils/55 MOA	Side focus/PA	14.1 in.	30.9 oz.	CR
1034 20×50	3-15x	58 mm	50 mm	44.25 mm	SCR™ MIL		FFP	34 mm	Matte	36-7.5 ft.	3.50 - 4.25 in.	16-3.3 mm	1/10 mil; 100-click knob	π/z	π/z	32 Mils/110 MOA	16 Mils/55 MOA	Side focus/PA	14.1 in.	30.9 oz.	CR
1041	4-20x	58 mm	50 mm	44.25 mm	Horus [®] H591™	100	FFP	34 mm	Matte	25.8-5.4 ft.	3.50 - 4.25 in.	12-2.5 mm	1/10 mil; 100-click knob	Π/Z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	Side focus/PA	14.9 in.	30.9 oz.	CR
1042	4-20x	58 mm	50 mm	44.25 mm	SCR™ MIL		FFP	34 mm	Matte	25.8-5.4 ft.	3.50 - 4.25 in.	12-2.5 mm	1/10 mil; 100-click knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	Side focus/PA	14.9 in.	30.9 oz.	CR
1042	4-20x				SCR™ MOA	1.1	FFP			25.8-5.4 ft.	3.50 - 4.25 in.	12-2.5 mm	1. C 189700700	π/Ζ		and the second	55 MOA		14.7 in.		CR
		58 mm	50 mm	44.25 mm		1.1.1		34 mm	Matte				1/4 MOA; 100-click knob		π/z	90 MOA	THY II A	Side focus/PA		30.9 oz.	
1044	4-20x	58 mm	50 mm	44.25 mm	G2B Mil-Dot™	•	FFP	34 mm	Matte	25.8-5.4 ft.	3.50 - 4.25 in.	12-2.5 mm	1/10 mil; 100-click knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	Side focus/PA	14.9 in.	30.9 oz.	CR
1045	4-20x	58 mm	50 mm	44.25 mm	SCR™ MIL		FFP	34 mm	Matte	25.8-5.4 ft.	3.50 - 4.25 in.	12-2.5 mm	1/10 mil; 100-click knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	Side focus/PA	14.9 in.	30.9 oz.	CF
25×50														10.010.001	0.1 <u>1</u>	Westing -					
1051	5-25x	58 mm	50 mm	44.25 mm	SCR™ MIL	•	FFP	34 mm	Matte	21-4.3 ft.	3.50 – 4.25 in.	10-2.0 mm	1/10 mil; 100-click knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	Side focus/PA	16.3 in.	32.1 oz.	CR
1052	5-25x	58 mm	50 mm	44.25 mm	SCR™ MOA	1	FFP	34 mm	Matte	21-4.3 ft.	3.50 - 4.25 in.	10-2.0 mm	1/4 MOA; 100-dick knob	π/z	π/z	90 MOA	55 MOA	Side focus/PA	16.3 in.	32.1 oz.	CR
1053	5-25x	58 mm	50 mm	44.25 mm	G2B Mil-Dot™	•	FFP	34 mm	Matte	21-4.3 ft.	3.50 - 4.25 in.	10-2.0 mm	1/10 mil; 100-click knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	Side focus/PA	16.3 in.	32.1 oz.	CR
1054	5-25x	58 mm	50 mm	44.25 mm	SCR™ MIL		FFP	34 mm	Matte	21-4.3 ft.	3.50 – 4.25 in.	10-2.0 mm	1/10 mil; 100-click knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	Side focus/PA	16.3 in	32.1 oz.	CR
1056	5-25x	58 mm	50 mm	44.25 mm	SCR™ MIL	•	FFP	34 mm	FDE	21-4.3 ft.	3.50 - 4.25 in.	10-2.0 mm	1/10 mil; 100-click knob	π/z	π/z	26.2 Mils/90 MOA	16 Mils/55 MOA	Side focus/PA	16.3 in	32.1 oz.	CF
10x50	mm																				

SPECIFICATIONS

(

Ballistic CQ™

+<mark>(;)</mark>+++


Ballistic AR™



PAGE 75

NTAC™ R	liflescopes	Series			1000		-		-								Ballistic (.Q™	Ballistic AR™
lem	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Illumination	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight	Battery
1-4x24mm	10 I.I. (1)	1.2	1.1.1				1												Sine -
200437	1-4x	30 mm	24 mm	42 mm	Ballistic CQ™	1991	RFP	30 mm	Matte	100-32 ft.	3.5-4.0 in.	24-32 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	14.5 oz.	CR203
200426	1-4x	30 mm	24 mm	42 mm	Ballistic AR™	S. be	RFP	30 mm	Matte	100-32 ft.	3.5-4.0 in.	24-32 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	14.5 oz.	CR203
200457	1-4x	30 mm	24 mm	42 mm	Ballistic AR™	•	RFP	30 mm	Blackout	100-32 ft.	3.5-4.0 in.	24-32 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	14.5 oz.	CR2032
200466	1-4x	30 mm	24 mm	42 mm	Ballistic AR™	•	RFP	30 mm	Sandstorm	100-32 ft.	3.5-4.0 in.	24-32 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	14.5 oz.	CR2032
1-4x24mm	n Tactical Kit			1 M		10.002 +1													
200437-FF	1-4x	30 mm	24 mm	42 mm	Ballistic CQ™	1.1.1	RFP	30 mm	Matte	100-32 ft.	3.5-4.0 in.	24-32 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	25.0 oz.	CR2032
200426-FF	1-4x	30 mm	24 mm	42 mm	Ballistic AR™	·	RFP	30 mm	Matte	100 - 32 ft.	3.5-4.0 in.	24 - 32 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	25.0 oz.	CR2032
200465	1-4x	30 mm	24 mm	42 mm	Ballistic AR™		RFP	30 mm	Blackout	100 - 32 ft.	3.5-4.0 in.	24 - 32 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	25.0 oz.	CR2032
200467	1-4x	30 mm	24 mm	42 mm	Ballistic AR™		RFP	30 mm	Sandstorm	100 - 32 ft.	3.5-4.0 in.	24 - 32 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	25.0 oz.	CR2032
Tactical kit incl	udes scope, FastFin	e™ 3, and AR-P.E.I	P.R.™ Mount																
SkullTac™	Riflescope 1-4>	c24mm Tactica	l Kit																
200438-FF	1-4x	30 mm	24 mm	42 mm	Ballistic CQ™	•	RFP	30 mm	SkullTac camo	100-32 ft.	3.5-4.0 in.	24-32 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	25.0 oz.	CR2032
Tactical kit incl	ludes scope, FastFin	e™ 3, and AR-P.E.I	P.R.™ Mount																
1.5-6x42m	ım	216 617																	
200429	1.5-6x	46 mm	42 mm	39 mm	Ballistic CQ™	· · /	RFP	30 mm	Matte	33–13 ft .	3.1-3.8 in.	27 – 7 mm	1/2 MOA	80 MOA	80 MOA		12.2 in.	15.5 oz.	
200439	1.5-6x	46 mm	42 mm	39 mm	Ballistic AR™	•	RFP	30 mm	Matte	33–13 ft.	3.1-3.8 in.	27 – 7 mm	1/2 MOA	80 MOA	80 MOA		12.2 in.	15.5 oz.	





m	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Illumination	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/ Focus	Length	Weight	Battery
-4x24mm					in a Water	111124	1.1	19 A. L.	42.8 9	DI 12 0 1 1 1 1 1	2-8 B S	Sec.			1.275	1.07	10.3	1.00	1
00433	1-4x	30 mm	24 mm	42 mm	Ballistic CQ™	10100.	RFP	30 mm	Matte	100-32 ft.	3.5-4.0 in.	24-6 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	17.0 oz.	CR2032
-4x24mm 1	Tactical Kit			10.00													310100		100
00433-FF	1-4x	30 mm	24 mm	42 mm	Ballistic CQ™	1600	RFP	30 mm	Matte	100-32 ft.	3.5-4.0 in.	24-6 mm	1/2 MOA	130 MOA	130 MOA		11.3 in.	25.0 oz.	CR2032
actical kit incluc	des scope, FastFire	e™ 3, and AR-P.E.	P.R.™ Mount																
		e™ 3, and AR-P.E.																	

*Example: 50 MOA is roughly 25 MOA in any direction from cent



RT-6 Riflescopes[™] Series

							_												
ltem	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Illumination	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight	Battery
1-6X24mm															1.				
200472	1-6x	30 mm	24 mm	46 mm	Ballistic AR™	•	RFP	30mm	Matte	106-18.5 ft .	3.3-4.0 in.	11.5-5.2 mm	1/2 MOA	80 MOA	80 MOA		10.3 in.	17.4 oz.	CR2032
1-6X24mm	Tactical Kit																		
200475	1-6x	30 mm	24 mm	46 mm	Ballistic AR™	•	RFP	30mm	Matte	106-18.5 ft.	3.3-4.0 in.	11.5-5.2 mm	1/2 MOA	80 MOA	80 MOA		10.3 in.	25.4 oz.	CR2032
Tactical kit incl	udes scope, FastFi	re™ 3, and AR-P.E.	.P.R.™ Mount																N Sid
*Example: 50 MC	A is roughly 25 MOA	in any direction from ce	enter																1123465

TACTICAL SPECIFICATIONS



C4 Wind MOA™

liem	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight
4.5-14x42	2mm	3. N. C. S. C	1.000					1.26		1000				- 80 Martin	10 11	1.1.1.1.2.2	510 at 1 - 54
200333	4.5-14x	56 mm	42 mm	39 mm	C4 Wind MOA™ 5.56	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	42 MOA	42 MOA	Objective PA	13.0 in.	18.0 oz.
200334	4.5-14x	56 mm	42 mm	39 mm	C4 Wind MOA™ 7.62	RFP	1 in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	42 MOA	42 MOA	Objective PA	13.0 in.	18.0 oz.
Sec. 24. 3							1.							1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		1. 1. 1. 1.	128. 21


Example: 50 MOA is roughly 25 MOA in any direction from

AR Riflescopes[™] Series

	h (*)	1			-	SQL 1		1.11	C. Same			5.35	Suppose .			7	
SR Rifl	escopes [™] Se	eries			-						STATUS.	1 8.75	STATE:			1	Ballistic Ple
m	Magnification	Objective End Diameter	Clear Objective Diameter	Ocular End Diameter	Reticle	Focal Plane	Main Tube Size	Finish	Field of View (Low to High, @ 100 yds.)	Eye Relief	Exit Pupil (Low to High)	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weigh
-9x40mm				10-22-02	1	37 10 5	112 N	194 28	271162	10000			C 0112	1.0.00	1 1 2 2 3		
00137	3-9x	48 mm	40 mm	39 mm	Ballistic Plex™ .223	RFP	1 in.	Matte	33-13 ft.	3.1-3.8 in.	13-5 mm	1/4 MOA	52 MOA	52 MOA		12.2 in.	13.0
.5-14x42	mm												미문의 강성도				
00195	4.5-14x	56 mm	42 mm	39 mm	Ballistic Plex™ .223	RFP	l in.	Matte	22-7.5 ft.	3.1-3.8 in.	9-3 mm	1/4 MOA	42 MOA	42 MOA	Objective PA	13.0 in.	18.0







PAGE 77

AR Sights Series

ltem	Magnification	Clear Objective Diameter	Reticle	Reticle Color(s)	Illumination	Finish	Mount	Field of View (@ 100 yds.)	Close Focus	Eye Relief	Click Value	Height Above Rail to Optic Centerline	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus (@ 100 yds.)	Length [†]	Weight	Battery
AR-1X™		1.000	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	Alleration														-
300214	lx	20 mm	Ballistic CQ [™] -1X	Black; red; green	•	Matte	Picatinny Rail Base	75 ft.	18 in.	2.7 in.	1/2 MOA	1.6 in.	120 MOA	120 MOA		4.00 in.	13.20 oz.	AA
AR-1X™ T	actical Kit			100														
300219	lx	20 mm	Ballistic CQ™-1X	Black; red; green		Matte	Picatinny Rail Base	75 ft.	18 in.	2.7 in.	1/2 MOA	1.6 in.	120 MOA	120 MOA		8.00 in.	25.20 oz.	AA
Tactical kit in	cludes sight, AR-T	ripler™, and AR-Piv	ot Ring™, Quick Detac	h														
AR-332™																		
300208	3x	32 mm	Ballistic CQ™	Black; red; green	•	Matte	Picatinny Rail Base, AR-QD Mount	32 ft.	9 ft.	2.5 in.	1/2 MOA	1.6 in.	80 MOA	80 MOA		5.30 in.	14.20 oz.	CR2032
300217	3x	32 mm	Ballistic AR™	Black; red; green	77.0	Matte	Picatinny Rail Base, AR-QD Mount	32 ft.	9 ft.	2.5 in.	1/2 MOA	1.6 in.	80 MOA	80 MOA		5.30 in.	14.20 oz.	CR2032
AR-332™	Tactical Kit	1.1																
300222	Зx	32 mm	Ballistic CQ™	Black; red; green	•	Matte	Picatinny Rail Base, AR-QD Mount	32 ft.	9 ft.	2.5 in.	1/2 MOA	1.6 in.	80 MOA	80 MOA		5.80 in.	15.70 oz.	CR2032
Tactical kit in	cludes sight, Fastf	ire 2, and ARD																
AR-536™		285 32																
300210	5x	36 mm	Ballistic CQ™	Black; red; green		Matte	Picatinny Rail Base, AR-QD Mount	20 ft.	25 ft.	2.5-3.5 in.	1/3 MOA	1.6 in.	70 MOA	70 MOA		5.80 in.	18.75 oz.	CR2032
300218	Зx	36 mm	Ballistic AR™	Black; red; green		Matte	Picatinny Rail Base, AR-QD Mount	20 ft.	25 ft.	2.5-3.5 in.	1/3 MOA	1.6 in.	70 MOA	70 MOA		5.80 in.	18.75 oz.	CR2032
AR-536™	Tactical Kit																	
300223	5x	36 mm	Ballistic CQ™	Black; red; green	· ·	Matte	Picatinny Rail Base, AR-QD Mount	20 ft.	25 ft.	2.5-3.5 in.	1/3 MOA	1.6 in.	70 MOA	70 MOA		6.25 in.	20.25 oz.	CR2032
Tactical kit in	cludes sight, FastF	ire 2, and ARD												1.1				
AR-Tripler	тм																	
300213	3x	25 mm				Matte		44 ft.	3 ft.	2.5 in.			80 MOA	80 MOA		4.00 in.	6.40 oz.	- mar 9
AR-Tripler	™ Combo Pa	:kage								13 P. 19				N/IR			NEW TO	102113
300216	3x	25 mm				Matte	AR-Pivot Ring™, Quick Detach	44 ft.	3 ft.	2.5 in.	С. Э́.,	1.6 in.	80 MOA	80 MOA		4.00 in.	12.00 oz.	215.0
Combo pack	age includes sigh	t and AR-Pivot Ring	, Quick Detach						300	N 20					3 A 10		18	1.3
*Example: 50 N	IOA is roughly 25 MC	DA in any direction from	center							1 1 2								13.11

[†]Length without sunshade or flip-up covers

Lengin willoor son	sidde of hip op covers		Contraction of the local distribution of the	or solution in the second		10100 1022 160	CALLS ADDRESS	124 54 4	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		and the second	The second	1. 1. 1. 1. 1.	19 No. 1
													\frown	\frown
			13538								•	5	•	•
FastFire™	Series	San A.	-94/18-A		and the second	any second	A CARLEN	cin		- 10 Ug	3 MO/	A Dot 4	4 MOA Dot	8 MOA Dot
ltem	Clear Objective Diameter	Reticle	Reticle Color(s)	Illumination	Finish	Mount	Eye Relief	Click Value	Elevation Adjustment, Total Capability*	Windage Adjustment, Total Capability*	Parallax/Focus	Length	Weight	Battery
FastFire™ 2												System of		1998
300232	21x15 mm	4 MOA Dot	Red	•	Matte	Picatinny Mount	Unlimited		115 MOA	86 MOA	Parallax-free	1.8 in.	1.50 oz.	CR2032
300233	21x15 mm	4 MOA Dot	Red	•	Matte		Unlimited		115 MOA	86 MOA	Parallax-free	1.8 in.	0.90 oz.	CR2032
FastFire™ 3														
300234	21x15 mm	3 MOA Dot	Red	•	Matte	Picatinny Mount	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.50 oz.	CR1632
300235	21x15 mm	3 MOA Dot	Red	•	Matte		Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	0.90 oz.	CR1632
300236	21x15 mm	8 MOA Dot	Red	•	Matte	Picatinny Mount	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	1.50 oz.	CR1632
300237	21x15 mm	8 MOA Dot	Red	•	Matte		Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	1.9 in.	0.90 oz.	CR1632
AR-F3™														Station Pres
300215	21x15 mm	3 MOA Dot	Red	•	Matte	Picatinny Rail Base	Unlimited	1 MOA	115 MOA	86 MOA	Parallax-free	2.0 in.	4.60 oz.	CR1632
*Example: 50 MOA	A is roughly 25 MOA from center													LA BA

BURRIS

ACCESSORIES

Give yourself the performance edge with these quality Burris accessories. Say goodbye to glare, dust, and dings with a Burris Sunshade, Scope Cover, and Lens Pen. And make your practice perfect with Burris Targets.

VISIT OUR NEW ONLINE STORE TO FIND THE LATEST BURRIS BRANDED ITEMS!

WWW.BURRISOPTICS.COM/GEAR





SCOPE TUBE LEVEL

Item Number: 626006

- High visibility level indicator
- Mounts quickly and easily
- Helps keep your rifle perfectly vertical for accurate longrange shooting
- Fits 30mm and 34mm scope tubes

BURRIS SUNSHADES

• High-quality sunshades reduce or eliminate glare on the brightest days

tem Details

 626032
 Fullfield II™, Fullfield E1™, MTAC™ 6.5-20x - Matte, 3 in.

 626035
 Fullfield II™, Fullfield E1™, MTAC™ 4.5-14x - Matte, 3 in.

BURRIS TARGETS

Item Number: 626001

- 10 targets per package
- 13 in. x 13 in.
- Nine primary aiming spots in various sizes and shapes for different yardages and scope magnifications
- Non-glare red-orange graphics pop against the off-white, nonreflective background so you can easily detect bullet holes
- Designed for shooters by shooters

LENS PEN

Item Number: 626050

- Retractable soft brush gets rid of lens dust and debris
- Chamois pad at the opposite end is impregnated with self-replenishing cleaning compound to purge lenses of oils, fingerprints and moisture

BURRIS SCOPE COVER

ltem

626061

626062

626063

- Effectively protects against dust and dings between trips to the range or hunting grounds
- Super-soft fabric is waterproof and breathable to prevent corrosion and fogging

Details Small 8.5 to 10.5 in. Objective bells to 39 mm

Medium 10.5 to 13 in. Objective bells to 48 mm

Large 13 to 17 in. Objective bells to 61 mm ACCESSORIES, WARRANTY, AND CUSTOMER SERVICE



Page 79

BURRIS FOREVER WARRANTY™

Every Burris optic is covered by the Burris Forever Warranty[™]. We will repair or replace your Burris optic if it is damaged or defective. The warranty is automatically transferred to future owners.

- No repair or replacement charge
- No questions asked
- No warranty card needed
- No receipt needed



CUSTOMER SERVICE

REPAIRS

To request repairs, see the instructions and get the repair authorization form at burrisoptics.com/customer-service/repairs.

BALLISTICS SERVICES

Get custom scope work, knob conversions and special-order reticles. Call 888-440-0244 for a quote and estimated turnaround time, and to order.

PRODUCT MANUALS

Download Burris Optics product manuals at burrisoptics.com/customer-service/manuals.

FAQS

Find answers to common Burris Optics questions at burrisoptics.com/customer-service/faqs.

REBATES, PROMOTIONS AND NEW PRODUCTS

Sign up to receive emails about rebates, promotions and brand new products. Go to **burrisoptics.com/customer-service/email-subscription**.

LEGAL INFORMATION

The following are trademarks of Burris Company, Inc.: AR Riflescopes[™], AR Riflescope[™], AR-1X[™], AR-332[™], AR-536[™], AR-F3[™], AR-F3[™], AR-Pixot Ring[™], Quick Detach, AR-Tripler[™], Ballistic CQ[™], Ballistic CQ[™]-1X, Ballistic Mil-Dot, Ballistic Plex E1[™], Ballistic CQ[™], Ballistic Plex[™], Ballistic Callistic Callistic Callistic Plex[™], Ballistic Callistic Callistic Plex[™], Ballistic Callistic Callistic Callistic Plex[™], Ballistic Callistic Callistic Callistic Plex[™], Ballistic Callistic Callist

Forever Warranty[™], FourX[™], Fullfield E1[™], Fullfield II[™], Fullfield II[™], Fullfield TAC30[™], G2B Mil-Dot[™], High Country[™], Hilume[™], Horus[®] H591[™], Long-Range MOA, LRS[™], MSR Riflescopes[™], MTAC[™], Pos-Align[®] Inserts, Posi-Lock[™], PTC[™], Ruger[®]to-Weaver Base Adapter, Scope Tube FastFire[™] Mounts, SCR[™], MIA, SCR[™] MOA, Signature Rings[™], SkullTac[™], SpeedBead[™], StormCoat[™], Timberline[™], Veracity[™], Wind/Map[™], XTB[™], XTR II[™], XTR Signature Rings[™], Xtreme Tactical[™] Bases, Xtreme Tactical[™] Rings, XTS-2575[™].

The following firearm brand and model names are registered trademarks of their respective owners: Benelli Super Black Eagle, Super Black Eagle II, M1, M2, Montefeltro, Ultra Light, Super Nova, R1, ARGO, Legacy, Sport II, Super Sport, Cordoba; Beretta 92, 96, 90-TWO, Cougar, PX4 Storm; Browning Silver Auto, Maxus, Gold; Franchi I-12; Glock; Marlin 336, 444, 1895. Remington 870, 1100, 1187; Sig Sauer P226; Smith & Wesson M&P; Springfield XD; Stoeger 2000, P-350, 3500. Winchester SX3, M94. CZ is a registered trademark of CZ-USA. Franchi is a registered trademark of Franchi S.P.A. Kimber is a registered trademark of Kimber Mfg., Inc. 10/22, 77/22, 77/17, 77/44, 77/ML, Blackhawk, Mark I, Mark II, Mark III, Mini-14, M77, Redhawk, Ruger, Ruger No. 1, Super Blackhawk Hunter, and Super Redhawk are registered trademarks of Sturm, Ruger & Co., Inc. Marlin is a registered trademark of Remington Arms Company, LLC. Smith & Wesson is a registered trademark of Smith & Wesson Corp. Taurus is a registered trademark of Forjas Tauras S.A.

Tikka is a registered trademark of Sako Ltd., Corp. Torx is a registered trademark of Textron Inc. Leupold is a registered trademark of Leupold & Stevens, Inc. Predator Quest is a registered trademark of Predator Quest, LLC. Realtree Max-1[®] is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Horus[®] H591[™] is a registered trademark of Horus Vision, LLC produced upon license from Horus Vision, LLC and may be covered by pending or issued patents or may have certain limitations. Please visit Horus Vision, LLC's website for more information: www.horusvision.com.

Burris products are protected by one U.S. Patents: burrisoptics.com/patents.

All prices and specifications are subject to change without notice.

© Copyright 2017 Burris Company



2017 TACTICAL HENT OPTICS

BURRIS COMPANY, INC.

331 E. 8TH STREET GREELEY, CO 80631 **P:** 888-440-0244 **F:** 970-356-8702