
SWAROVSKI OPTIK RETICLE SELECTION



BRH (Ballistic Reticle Heavy) / BRX Reticle (Ballistic Reticle Fine)

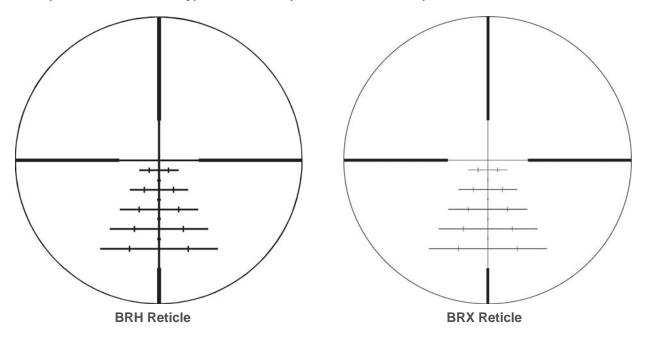

Both are currently available in the following models:

- Z3 3-10x42
- Z3 4-12x50
- Z5 3.5-18x44
- Z5 5-25x52

The only difference between these reticles is the crosshair thickness. Designed for long-range shooting, eliminating the need for turret adjustments.

BRX (Ballistic Reticle Fine): Fine look, designed more for varmint hunters, target shooters, those preferring a thin reticle.

BRH (Ballistic Reticle Heavy): Thicker, heavier design for better low light hunting visibility or for those that prefer a heavier reticle.

Features


- Windage compensation up to 20 mph
- Can be used to range to a target. Easy to use ranging chart included.
- Supported by BRH / BRX ballistic calculator at WWW.SWAROVSKIOPTIK.COM
- Comes with 50 "factory" ballistic decals for popular hunting cartridges. These decals that can be used as templates for over 500 other cartridges that have virtually the same trajectories. These "Match Ups" are easily found in the BRH/BRX Decal Selection Chart supplied with every BRH/BRX instruction manual.


Sample from BRH/BRX Decal Selection Chart


Decals available for most common cartridges

	Cartridge/Mfg.	B.C.	Decal Number		
7mm Rem Mag					
	Hornady 139 gr BTSP InterLock 3150 fps	0.453	# 7, 25-06 Rem		
	Hornady 139 gr InterBond 3150 fps	0.486	# 33, 7mm STW		
	Hornady Heavy Magnum 139 gr SST Interlock 3250 fps	0.486	# 37, 300 Wby		
	Hornady Heavy Magnum 139 gr InterBond Moly 3250 fps	0.486	# 37, 300 Wby		
	Winchester 140 gr AccuBond CT 3180 fps	0.460	# 33, 7mm STW		
**	Federal 140 gr Nosler Partition 3150 fps	0.434	# 11, 270 WSM		
***	Remington 140 gr AccuTip Boat Tail 3175 fps	0.486	# 13, 7mm Rem Mag		
	Federal 140 gr Nosler AccuBond 3110 fps	0.485	# 14, 7mm Rem Mag		
*	Remington 140 gr Core-Lokt Pointed Soft Point 3175 fps	0.390	# 25, 30-06 Sprg		


BRH/BRX Decal Samples

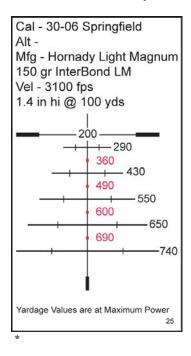

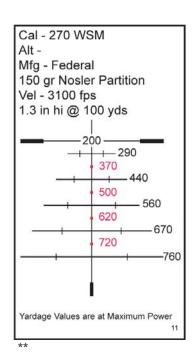

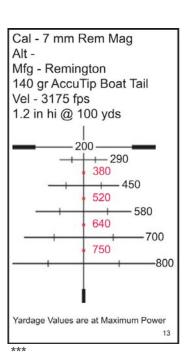


BRT(i) Reticle (Ballistic Reticle Tactical)

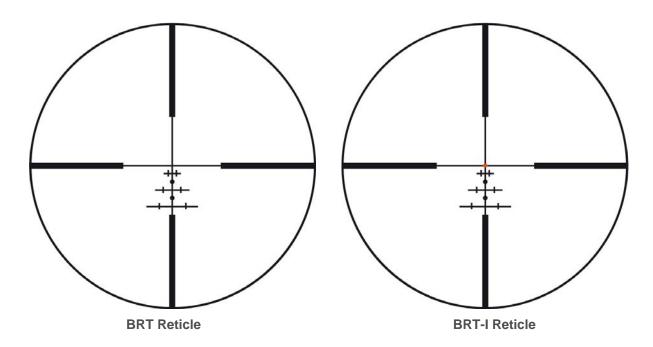



Features


- Available only in the Z6(i) 1-6x24. Not available with BT (Ballistic Turret)
- Designed primarily for AR platform rifles. True 1X magnification allows for rapid target acquisition and ability to keep both eyes open for close shooting. Illuminated Dot (in Z6i) allows for intuitive fast aiming. Long-range BRT reticle allows for precise shooting out to 500 meters
- Comes supplied with decals of popular "AR" cartridges in 16" and 20" barrel lengths plus 5 blank decals for customizing
- Windage compensation up to 20 mph
- Can be used to range to a target. Easy to use ranging chart included.
- Supported by the BRT ballistic calculator at WWW.SWAROVSKIOPTIK.COM


BRT Decal Samples















BT (Ballistic Turret)







Available on the following models Plex or 4A-I Reticle

Z6(i) 1.7-10x42 Z6(i) 2-12x50

Z6(i) 2.5-15x44

Z6(i) 2.5-15x56

Z6(i) 3-18x50

Z6(i) 5-30x50

Plex Reticle Only

Z5 3.5-18x44

Z5 5-25x52


Z3 4-12x50

(Not available on the Z6(i) 1-6x24, Z3 3-10x42 or Z3 3-9x36)


Features

- Designed for the shooter that prefers the simplicity of a Plex/4A-I reticle, but a scope that still has the ability for long range situations.
- Simple, one-time set-up
- Comes with blank decals so that the user can choose downrange distance settings of the user's choice
- Supported by BT Ballistic Calculator featured on WWW.SWAROVSKIOPTIK.COM

BT Decal




Decal supplied with BT Scope



Example of Desired Downrange Distances



BR(i) Reticle (Ballistic Reticle)

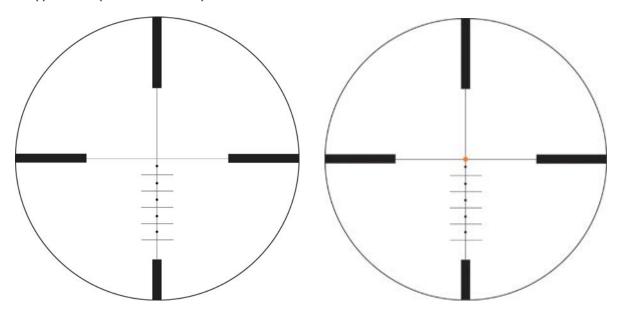

Currently available in the Z6 series only on the following models:

Z6 1.7-10x42 (not on Z6i)

Z6(i) 2-12x50

Z6(i) 2.5-15x44

Z6(i) 2.5-15x56


Z6(i) 3-18x50


Z6(i) 5-30x50

Features


- Takes the guesswork out of long range shooting
- Supplied with 40 Factory Ballistic Decals
- Supported by on-line ballistic calculator featured on WWW.SWAROVSKIOPTIK.COM

BR Decal Samples






ML (Muzzle Loading) Reticle





Features

- Supplied with Blank Decals for customizing to the shooters specific load
- Instruction manual shows downrange values for over 30 popular Black Powder projectiles and powder charges


ML Decal Samples








Plex Reticle




- Very popular standard style reticle General purpose clean looking
- Simple to use
- Available in Z6, Z5, and Z3 rifle scope series

7A Reticle




- Heavier dimensions than Plex Reticle
- Easier to see in low light conditions
- Available in the Z6 rifle scope series only

4A Reticle




- Heavy subtensions make this a good low light reticle
- Lack of upper heavy post allows better view of target
- Popular European style reticle
- Available in Z3 and Z6 rifle scope series
- Available as illuminated in the 4A-I

4 Reticle




- Similar features to 4A, except heavy post are closer together
- Good low light visibility
- Available in Z5 and Z6 rifle scope series
- Available as illuminated in 4-I (only in Z6 1-6x24)

Fine Reticle



- Good reticle for use where minimum target obstruction is important
- Long-range varmint hunting / target shooting
- Available only in the Z5 5-25x52

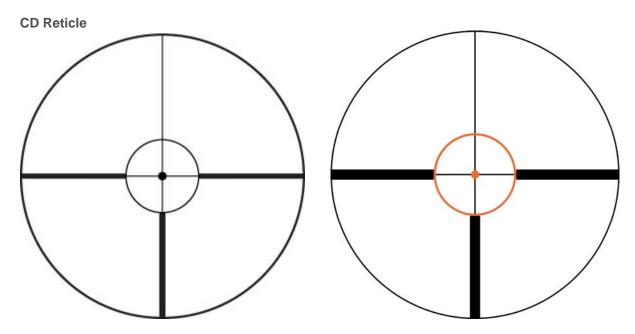

- Good reticle for dangerous game, close quarter distances
- Very intuitive aiming
- Quick to bring on target Available in the Z6(i) 1-6x24 (EE), Z6i 1.7-10x42

Reticle Selection Chart

Non-Illuminated Reticles

	BRH	BRX	BRT	BR	Plex	4A	7A	4	CD	Fine	BT-Plex	ML
Z3 3-9x36					•	•						
Z3 3-10x42	•	•			•	•						•
Z3 4-12x50	•	•			•	•					•	
Z5 3.5-18x44	•	•			•			•			•	
Z5 5-25x52	•	•			•			•		•	•	
Z6 1-6x24			•					•	•			
Z6 1-6x24 EE								•	•			
Z6 1.7-10x42				•	•		•	•			•	
Z6 2-12x50				•	•		•	•			•	
Z6 2.5-15x44				•	•	•	•				•	
Z6 2.5-15x56				•	•	•	•				•	
Z6 3-18x50				•	•	•					•	
Z6 5-30x50				•	•						•	

Illuminated Reticles

	BRT-I	BR-I	4A-I	CD-I	4-I	BT 4A-I
Z6i 1-6x24	•			•	•	
Z6i 1-6x24 EE				•	•	
Z6i 1.7-10x42			•	•		•
Z6i 2-12x50		•	•			•
Z6i 2.5-15x44		•	•			•
Z6i 2.5-15x56		•	•			•
Z6i 3-18x50		•	•			•
Z6i 5-30x50		•	•			•

• Indicates Availability in Scope