



ZEISS 2022/2023 Hunting and Precision Shooting Catalog



Seeing beyond

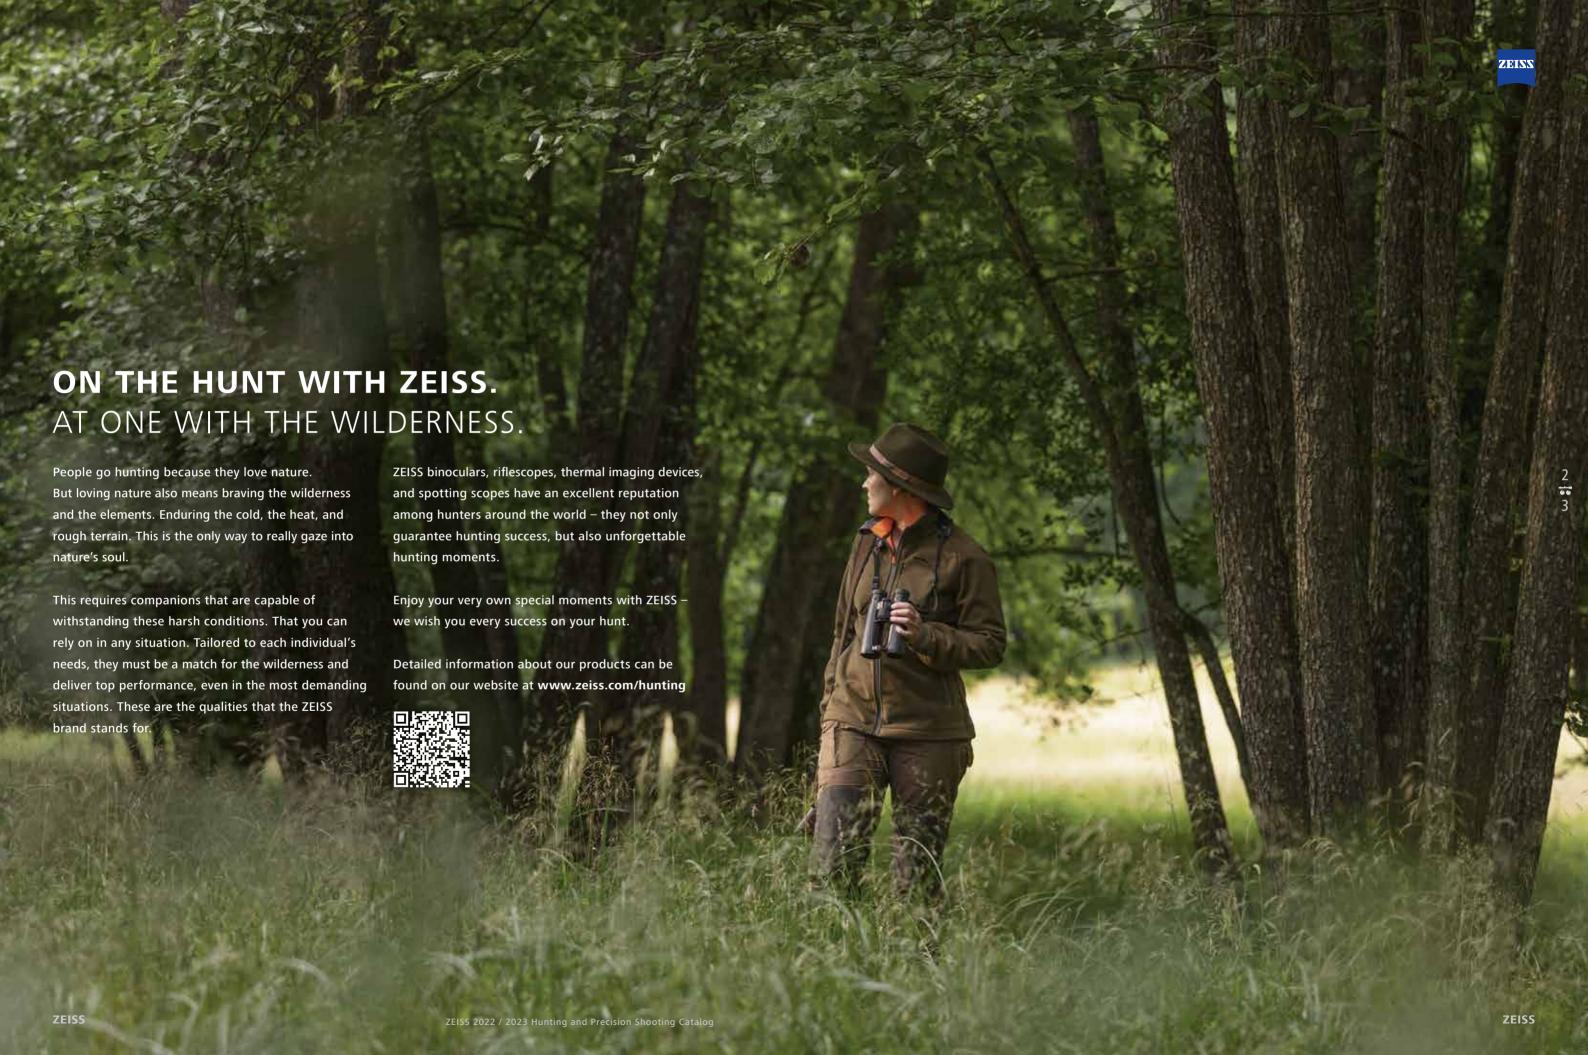


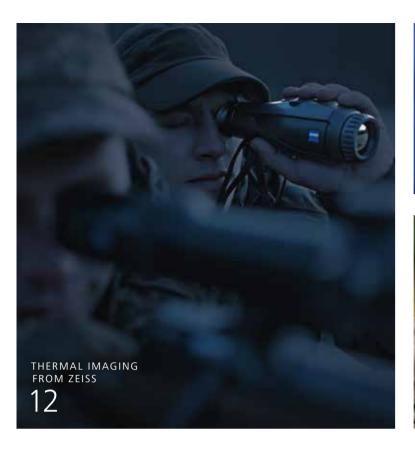









| Proven in the lab, tried and tested in the |
|--|
| great outdoors6 |
| Hunting App8 |
| Thermal Imaging at a glance30 |
| Riflescopes at a glanc58 |
| Recticles from ZEISS60 |
| Binoculars at a glance112 |
| ZEISS Hunting Community |

| THERMAL IMAGING 12 |
|--------------------|
| DTC 316 |
| DTI 324 |
| RIFLESCOPES32 |
| ZEISS V834 |
| Victory HT40 |
| Conquest V646 |
| Conquest V452 |
| LRP S564 |

| BINOCULARS72 |
|-------------------------------|
| Victory SF74 |
| Victory SFL80 |
| Victory HT86 |
| Victory Pocket92 |
| Conquest HD96 |
| Terra ED102 |
| Victory Rangefinder System108 |
| SPOTTING SCOPES114 |
| Victory Harpia116 |
| Conquest Gavia120 |
| Dialyt |

| õ |
|---|
| ŝ |
| 7 |
| |

Tailored to your needs – ZEISS always offers the ideal product for the highest personal standards and a variety of hunting challenges. Uncompromising design, ergonomics, and optics, yet simple and rugged in use – that is what ZEISS riflescopes, binoculars, spotting scopes, and thermal imaging cameras are all about.

ZEISS 2022 / 2023 Hunting and Precision Shooting Catalog

PROVEN IN THE LAB.

TRIED AND TESTED IN THE GREAT OUTDOORS.





Testing extreme situations: significant temperature fluctuations within minutes and shot simulations with 1,500 times the force of gravity.

For over 175 years, ZEISS has been developing premium optical devices that stand out for their optical clarity, technical innovations, and outstanding ergonomics.

But it is not just this pursuit of perfection that makes ZEISS optics what they are. Hunting optics are not scientific instruments, but tools that have to work at all times, even in the toughest hunting conditions.

A material defect in your jacket or hiking boots that aren't waterproof are annoying. But a malfunctioning gun or optical device means an abrupt end to a day's hunting. That is why absolute reliability – even under the most adverse conditions – is our top priority.

Defy the elements.

Thanks to the best materials and uncompromising manufacturing quality, we can guarantee a level of reliability and ruggedness that is appreciated by hunters the world over. Hunters and their gear have to brave inclement weather and difficult terrain again and again. If heavy rain sets in when hunting from a raised hide, there is usually only one thing to do: hang in there!

The ability of your optical devices to withstand the rain should be the least of your worries at this point. Similarly, it is virtually impossible to avoid extreme temperature fluctuations when stepping out of your heated car into the cold winter air.

But it isn't only environmental factors that play a role. A fall in difficult terrain with a shouldered weapon, your weapon falling over when in a raised hide, or a bumpy ride in the trunk – in these situations, the ability of your optical devices to take a beating is of paramount importance.







No holds barred: ZEISS quality not only holds its own in the lab, but also in the harsh everyday hunting environment.

Your ZEISS optical device is ready for anything.

This is why every ZEISS optical device is subjected to elaborate tests at our in-house ZEISS test lab to determine its durability and suitability for everyday use. In this process, our proven testing procedures push the devices to their limits. In this context, ZEISS utilizes a range of special testing methods. Whether simulating transport, continuous shock, firing with 1,500 times the force of gravity, the 24-hour corrosion test in aggressive salt spray, or testing the product's waterproofness by submerging it in water, all of the

tests simulate levels of stress many times higher than those encountered in normal hunting use. These rigorous testing procedures ensure that every device functions flawlessly in the harsh day-to-day hunting environment, allowing you to perform with absolute confidence at the decisive moment — for years and decades to come.

No punches pulled



Experience ZEISS optical devices in a stress test – under both extreme conditions in the lab and in harsh real-world conditions.

www.youtube.com/user/ zeisssportsoptics

EIZZ

THE APP FOR THE MODERN HUNTER.

ZEISS Hunting App – ballistics. Hunting ground management. Hunting diary.

A versatile hunting companion – the ZEISS Hunting App is available to hunters as both a mobile app and as a web app on desktops and tablets. In addition to numerous helpful features to prepare for and document a hunt, it now also offers the ability to manage hunting grounds together with others. This makes organization and communication in the hunting ground even easier. You can also share diary entries, ballistic profiles, and gear data with friends right in the app.





A customizable home screen with direct access to your favorite features.



Ballistic calculations and ballistic reticle/ASV including an ammunition database with over 7,000 entries matched to your specific riflescope.

Hunting diary

Document all of your experiences with hunting-related data such as information about the game and your shots, photos, videos, and much more.



Hunting grounds

Create and manage hunting grounds in the app or via browser. You can easily mark important points on the map. The app displays your current position to help you to find your way around the area. You can manage hunting grounds together with your fellow hunters, with whom you can communicate via the hunting ground pinboard.



Weather information

A weather forecast specifically tailored to your needs, with information about your current location and preferred hunting grounds.



My gear

A convenient overview of all your hunting gear. Important product information at your fingertips and all in one place.



Connected products

Connect and configure the ZEISS
Victory Rangefinder and ZEISS DTC 3
thermal imaging clip-ons via
Bluetooth and the ZEISS DTI 3
thermal imaging cameras via WLAN.



News

All of your shared posts are displayed together in a news feed, along with exclusive offers and ZEISS product news.



Sharing

Share your entries from the Ballistics, Hunting Diary, and My Gear sections with your friends right from the app.

The ZEISS Hunting App is available free of charge.

Download it from the Apple App Store or
the Google Play Store. The browser version is
available at hunting.zeiss.com






For more details, visit www.zeiss.com/hunting/app

ZZIS

CONNECTED PRODUCTS -

DEVICES CONNECTED TO THE ZEISS HUNTING APP.



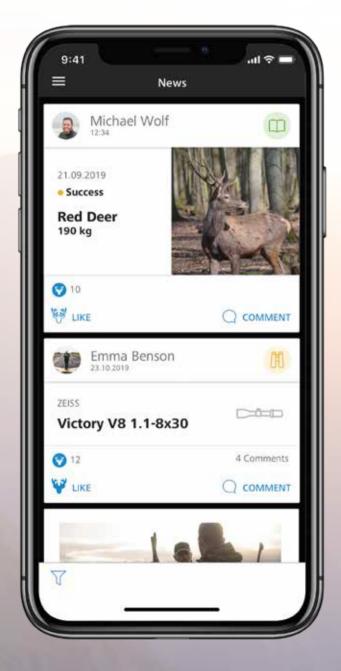

ZEISS VICTORY RF

Laser rangefinder with integrated real-time ballistic calculator

Space to save up to nine personalized ballistic profiles that can be set up in the ZEISS Hunting app. Thanks to Bluetooth connectivity, you can import personal ballistics data from the ZEISS Hunting App into the Victory RF. Each measurement also takes the physical properties and environmental factors such as temperature and air pressure into account in the calculation.



Bluetooth

ZEISS DTI 3

Thermal imaging camera

Using the ZEISS Hunting app, hunters can copy data from the thermal imaging camera directly to a smartphone via WLAN and even live-stream their hunting adventures.



ZEISS DTC 3

Thermal imaging clip-on

ZEISS DTC 3 thermal imaging clip-ons can also be programmed and customized via the ZEISS Hunting app. In addition, the app offers a digital zeroing assist feature. You can also save up to four personal zeroing profiles here.



Bluetooth

Ethically hunting wild boar at night requires the right equipment. After all, in the dark it is almost impossible to rely on your sense of sight alone. But the night is precisely the most important time for hunters when hunting sows.

That's why hunters need a companion, one that makes it possible to accurately identify the game, even in the dark. A companion with the highest optical standards that can be relied on at night. A companion in familiar ZEISS quality. This is precisely why ZEISS has developed thermal imaging cameras and now also the first thermal imaging clip-on. These were designed together with hunting experts specifically for night hunting.

Further information is available on our website at www.zeiss.com/thermal-imaging



THERMAL IMAGING FROM ZEISS

HANDLE THE NIGHT – WITH THERMAL IMAGING DEVICES.

Thermal imaging devices from ZEISS feature a wide range of advanced technologies and innovations.

The following pages explain which products offer which specific features and benefits in detail.

Here's an initial overview:

OPTIMAL **ERGONOMICS**

Excellent handling in the cold and darkness.

PERFECT **SIGHT AND OVERVIEW**

High-precision detail detection and extremely wide field of view.

PRECISE **ZOOM**

Fine, gradual adjustment of the zoom in $0.5 \times$ increments.

EXTRA LONG BATTERY LIFE

Battery capacity for long sessions with 10 hours of battery life.

HOW THERMAL IMAGING

DEVICES WORK.

Thermal imaging devices for hunting applications differ greatly from traditional optical devices for observation, such as binoculars and riflescopes. The optoelectronic devices are more comparable to digital cameras. A thermal imaging camera detects and measures the infrared energy emitted by objects. Using an image processing algorithm, the processor creates a colored representation of the object's temperature based on the signals from the individual pixels. In this context, each temperature value is assigned to a specific color. In addition, thermal imaging photos and videos can be recorded and transmitted via smartphone. Below we explain how they work and their individual components.

Functionality


While the light sensitivity of conventional digital cameras lies in the visible range of the human eye, thermal imaging cameras operate in the long-wave infrared range. This allows them to detect the thermal radiation emitted by a body independent of the available visible light, which is why thermal imaging devices can be used both in daylight and in total darkness.

Lens


The lenses are made of germanium, an element which transmits light in the required wavelength range. Germanium is extremely hard and is therefore always used when particularly robust and resistant optics are required.

High-quality eyepiece

Similar to the lens, the thermal imaging device's eyepiece also features high-quality optics. This allows the relaxed eye focused to infinity to view the image shown on the viewfinder display.

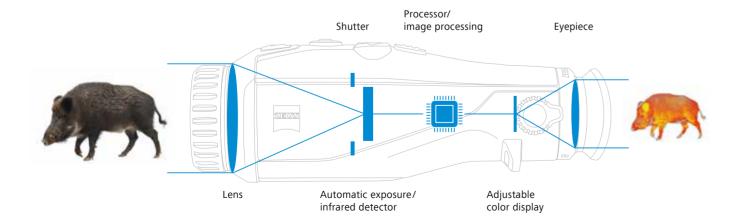



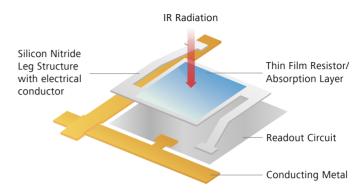

Schematic illustration of a microbolomete

Sensor

The sensor of a thermal imaging camera is known as a microbolometer. This mainly consists of amorphous silicon (ASI) or vanadium oxide (VOx). The electrical resistance of both materials is highly dependent on the temperature.

Adjustable color display

Depending on the area of application and how clearly the hunter wants to be able to recognize individual details in the subject, as well as their personal taste, different display modes (e.g., White Hot, Black Hot, Red Hot, Rainbow) in shades of gray or color can be selected for the image displayed on the thermal imaging camera's color screen. In addition, the overall brightness of the display can be varied to adjust it in order to suit eyes adapted to either light or dark.

Image processing

The electronic signal coming from the sensor is first digitized and then optimized via a complex image processing algorithm and adapted to the respective hunting situation. The perfect compatibility of the hardware components (lens, sensor, display, eyepiece) with the internal signal processing algorithm ultimately determines the visible image quality and how well relevant details can be recognized during an observation.

Shutter

Just like a digital camera, this can be used to control the amount of radiation passing through the lens. This shutter interrupts the infrared radiation that strikes the detector at regular intervals so that the detector can recalibrate itself from time to time. This produces the quiet clicking sound typical of thermal imaging devices.

Auto exposure system/ infrared detector

A thermal imaging camera is equipped with an "auto exposure" system, so to speak – depending on the ambient conditions, i.e., the changing temperature conditions, the temperature differences across the subject being viewed are divided into brightness or color differences in the best possible way. This produces a bright and highcontrast image for the viewer under all conditions. The resulting image does not reproduce the original colors of the object, but only shows temperature differences. The greater the temperature differences between the observed object and the environment, the more clearly its details and edges can be seen. In this process, the camera's image processing algorithm automatically adjusts the brightness and contrast.

ACCURATE. DURING NIGHT HUNTING.

INTUITIVE AND CUSTOMIZABLE.

ZEISS DTC 3

The ZEISS DTC 3 Thermal Imaging Clip-Ons stand out thanks to their best-in-class optics, outstanding ease of use, and intelligent features – for maximum hunting success at night.

Not only the darkness, but the fog and cold are special challenges hunters regularly face when hunting at night. With the ZEISS DTC (Digital Thermal Clip-On) 3/25 & 3/38, hunters are prepared for any situation, no matter how demanding, and can count on the best optics, a detailed image, intuitive ergonomics, and the greatest possible flexibility – whether in the open field or in the forest.



The angle sensor automatically detects the exact position of the ZEISS DTC 3 and activates standby mode at a lateral angle of 45° and at a downward or upward angle of 70°. When the hunter brings the weapon back to the firing position, the device automatically exits standby mode.

*The picture shows an example of use that, in connection with firearms, is subject to prohibitions and exceptional caveats under gun and hunting laws. Use in connection with firearms is only allowed if you have a gun/hunting permit. The depicted firearm is not included. You must hold a permit to purchase this item.

RELIABILITY AND PRECISIONIN THE DARK.

Customizable

The ZEISS DTC 3 can be connected to the ZEISS Hunting App via Bluetooth and then adapted to your own needs and requirements. In addition, you can save up to four profiles for different riflescopes.



Easy to use

Thanks to the central positioning of the focusing turret and the intelligent layout of the buttons, the ErgoControl operating concept offers outstanding ease of use – both for left-handed or right-handed users and when wearing gloves.



Always ready

With 10 hours of battery life in continuous use, the ZEISS DTC 3 can be used to observe for particularly long periods. The standby mode activated by the angle sensor additionally extends battery life. The device can even be charged directly in the field via a portable, external power bank.



Fast and precise zeroing

The zeroing assist that can be operated via the ZEISS Hunting App calculates the compensation values after entering the point of impact deviation, realigns the display accordingly and thus automatically centers the reticle. This eliminates the need to calculate clicks and makes the process much faster and hassle-free.

Accurate

Perfectly compatible components and an advanced image processing algorithm enhance night vision for an ethical hunt.






MAXIMUM FLEXIBILITY DURING NIGHT HUNTING

WITH THE ZEISS HUNTING APP.

The ZEISS Hunting App offers numerous features, such as the ability to capture, manage, document, and synchronize current happenings and hunting experiences directly from the field. The decisive advantage is that personal settings can also be configured via the app.

Configurable. For personalized hunting experiences.

The ZEISS DTC 3 can be connected to the ZEISS Hunting App via Bluetooth and adapted to your own requirements. One particularly convenient feature is that once the combination of ZEISS DTC 3 and riflescope has been zeroed, the hunter can save the setting as a profile in the app and easily switch the clip-on from one riflescope to the other. The ability to save up to four shooting profiles adds an impressive level of flexibility.

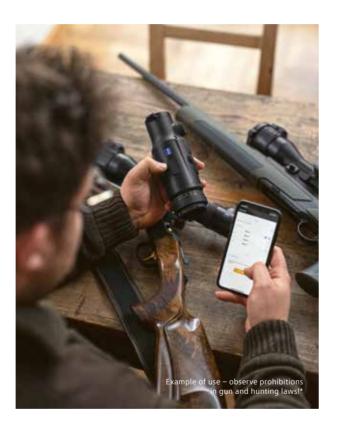

ZEISS HUNTING APP

Save up to four zeroing profiles. Capture and

share current happenings and experiences right on the spot. It's all possible with the ZEISS Hunting App! Also available as a

browser version.

Download the app for iOS or Android for free today!





*The picture shows an example of use that, in connection with firearms, is subject to prohibitions and exceptional caveats under gun and hunting laws. Use in connection with firearms is only allowed if you have a gun/hunting permit. The depicted firearm is not included.

You must hold a permit to purchase this item.

Can be operated via app

The ZEISS DTC 3 can be connected to the ZEISS Hunting App via Bluetooth and then adapted to your own requirements. For example, hunters can select which icons are displayed on the

screen and customize the information presented to suit their needs.

9:41

/ Back

Smart Stand By

Icon Mode

Show all Icons

Only Battery Icon

Auto-Calibration

Zeroing Profiles

Profile 1

Profile 2

Profile 3

Custom Name

والمد

Example of use - observe prohibitions

No Icons

Automatic

Manual

#1

#2

#3

The ZEISS DTC 3's control buttons can also be mirrored onto a

smartphone – turning it into a

Remote Control

Remote Control





al 후 🔳

0

Settings



Contrast Boost





00



ZEISS

ALWAYS READY

THANKS TO A SOPHISTICATED POWER MANAGEMENT.



Every hunter knows that a night hunt can sometimes last a long time. This not only requires patience, but also reliable battery performance. The ZEISS DTC 3 models offer 10 hours of continuous battery life, allowing for virtually unlimited use. In addition, the ZEISS DTC 3 can also be recharged via a portable power bank, if necessary.

Automatic standby mode

The angle sensor automatically detects the exact position of the clip-on and activates standby mode at a lateral angle of 45° and at a downward or upward angle of 70°. When the hunter brings the weapon back to the firing position, the ZEISS DTC 3 automatically exits standby mode. Standby mode can, however, also be deactivated by briefly pressing the power button.

OPTICAL EXPERTISE

Field of view comparison.

The ZEISS DTC 3/38 is optimized for higher magnification levels, as the full field of view can already be used when the riflescope is at $3 \times$ optical magnification. Our especially popular $3-12\times56$ riflescope is one of the models that you can combine with the ZEISS DTC 3/38 to benefit from a full field of view at $3 \times$ magnification. Numerous competitors only offer this advantage at lower magnifications.





View through a competing clip-on

View through the **ZEISS DTC 3**

CONVENIENT ZEROING

THANKS TO THE DIGITAL ZEROING ASSIST.


Every millimeter is crucial during the hunt, which is why an exact adjustment is so important during the zeroing process. The precise zeroing assist for the ZEISS DTC 3/25 and 3/38 is very easy to operate via the ZEISS Hunting App and thus makes the zeroing process not only faster, but also simpler and more convenient.

The hunter only has to enter the distance and the location of the hit into the app. The assist then independently calculates the corrective values and realigns the display accordingly. This eliminates the need to calculate clicks and makes the process much faster and hassle-free.





Zeroing via the ZEISS Hunting App

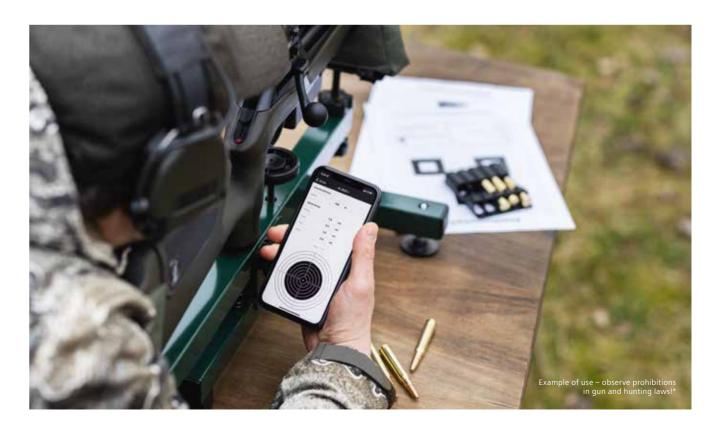

^{*}The picture shows an example of use that, in connection with firearms, is subject to prohibitions and exceptional caveats under gun and hunting laws.

Use in connection with firearms is only allowed if you have a gun/hunting permit. The depicted firearm is not included.

You must hold a permit to purchase this item.

THE ZEISS DTC 3/25 & 3/38 MODELS. COMPARISON OF BENEFITS.




ZEISS DTC 3/25

Particularly in the forest, the ZEISS DTC 3/25 – with its large field of view of 18.4 meters at a distance of 100 meters – offers a crucial overview and the ability to easily recognize details. Due to these outstanding optics, when they spot game hunters are perfectly equipped to react quickly, even at short distances and in total darkness.



ZEISS DTC 3/38

Range and accuracy at long distances play a crucial role in night hunting in open terrain. The ZEISS DTC 3/38 covers a larger area, has a field of view of 12.3 meters at 100 meters, and an accurate click value of 1.6 cm at 100 meters – for extremely precise zeroing and thus highly accurate and ethical shots.

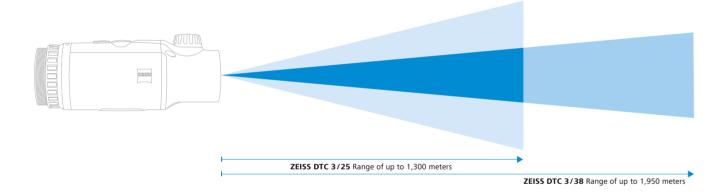



With a field of view of 18.4 meters at 100 meters, the ZEISS DTC 3/25 provides the best overview for night hunting in forested areas.



Thanks to a range of up to 1,950 meters, the ZEISS DTC 3/38 is perfect for identifying game at longer distances.

TECHNICAL **SPECIFICATIONS**.

| | Thermal Imaging Clip-On | | | | |
|---|-------------------------|-----------------------------|--|--|--|
| Model | ZEISS DTC 3/25 | ZEISS DTC 3/38 | | | |
| Optics | | | | | |
| Focal length | 25 mm / F1.0 | 38 mm / F1.0 | | | |
| Lens type | Geri | manium | | | |
| Range | ~ 1,300 m | ~ 1,950 m | | | |
| Field of view in m at 100 m | 18.4 m | 12.3 m | | | |
| Field of view in degrees (horizontal×vertical) | 10.5°×7.9° | 7°×5° | | | |
| Optical magnification | | 1× | | | |
| Maximum image adjustment X to 100 m | ±307 cm | ±205 cm | | | |
| Maximum image adjustment Y to 100 m | ±230 cm | ±154 cm | | | |
| Adjustment per click at 100 m | 2.4 cm | 1.6 cm | | | |
| Sensor | | | | | |
| Sensor resolution | 384 | × 288 px | | | |
| Sensor pixel pitch | 1 | 2 μm | | | |
| Frame rate | 5 | 50 Hz | | | |
| Display | | | | | |
| Display resolution | 1,024 | 1×768 px | | | |
| Display type | AN | MOLED | | | |
| Electronics | | | | | |
| Interfaces | | charging : data transfer | | | |
| Battery | Lith | Lithium-ion | | | |
| Battery life | | 10 h | | | |
| External power supply (not included in the package) | 5V/2 | 2 A (USB) | | | |
| Connection to other devices | ZEISS Huntin | g App, Bluetooth | | | |
| General | | | | | |
| Ingress protection rating | IP65/IP67 (protect | ion against heavy rain) | | | |
| Operating temperature range | -10 °C | to +50 °C | | | |
| Length×width×height | 150 mm × 60 mm × 65 mm | 164 mm × 60 mm × 65 mm | | | |
| Weight | 560 g | 650 g | | | |
| Order no. | 527030 | 527031 | | | |

Subject to changes in design and scope of delivery as a result of ongoing technical development.

ACCESSORIES

ZEISS DTC adapter

ZEISS offers the DTC adapter as an accessory to conveniently mount the clip-on to the riflescope. Once the combination of ZEISS DTC 3 and riflescope has been zeroed in, the ZEISS DTC 3 can be easily switched from one riflescope to the other with the aid of a two-part adapter – without changing the point of impact and having to be zeroed in again.



^{*}The picture shows an example of use that, in connection with firearms, is subject to prohibitions and exceptional caveats under gun and hunting laws. Use in connection with firearms is only allowed if you have a gun/hunting permit. The depicted firearm is not included. You must hold a permit to purchase this item.

24 25



HANDLE THE NIGHT.

INTUITIVE AND ERGONOMIC.

ZEISS DTI 3

The ZEISS DTI 3 models – technologically innovative optical devices for the night in familiar ZEISS quality and a one-of-a-kind, ergonomic design.

Hunting at night is a special experience for many hunters but one that places high demands on the equipment used. With its DTI 3 thermal imaging cameras, ZEISS always offers the right optical devices for nighttime hunting. Designed by hunting experts specifically for hunting, they produce detailed images to accurately identify targets, even in the dark.

ErgoControl Concept











Thanks to the intelligently positioned buttons, all of the functions can be controlled intuitively. The perfectly shaped controls can be quickly identified – even in the dark or when wearing gloves.

DETAILED IMAGES - EVEN IN TOTAL DARKNESS.

Precise zoom

The fine, gradual zoom adjustment in 0.5 × increments offers the perfect combination of magnification and



the ZEISS DTI 3 holds enough charge for two to four hunts. The standby feature conserves battery power by automatically shutting off the thermal imaging camera after 60 minutes of inactivity.



Outstanding optics in familiar ZEISS quality

The high-resolution 1,280 × 960 pixel HD-LCOS display delivers detailed images – even in total darkness.



HANDLE THE NIGHT – THANKS TO INTUITIVE ERGNOMICS.

The ZEISS DTI 3 models owe their outstanding optical performance to the fact that the lens, sensor, electronics, screen, and eyepiece are all perfectly compatible.

Above all, however, the DTI 3 family of thermal imaging cameras stands out thanks to its unique ergonomics — the ErgoControl operating concept, with its intelligently positioned buttons, makes it easy to intuitively activate all of the device's functions.

The perfect ergonomic design offers excellent handling in cold and dark conditions and ensures that both right-handed and left-handed users can operate the device comfortably.

Perfect ergonomics

Thanks to the ErgoControl operating concept with its intelligently positioned buttons, all of the functions can be controlled intuitively.



ErgoControl concept for intuitive operation

Contrast enhancement in foggy conditions

The Contrast Boost feature maximizes contrast to see as much detail as possible, even in foggy or humid conditions.





Contrast Boost Off



Contrast Boost On

Improved focusing

In picture-in-picture mode, a focus frame highlights the enlarged image section. For improved focusing and a successful, ethical hunt.






Picture-in-picture mode



STAY CONNECTED - WITH THE ZEISS HUNTING APP

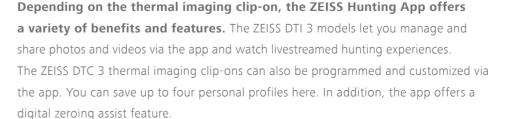

To learn more, visit **zeiss.com/hunting/app**The browser version is available at

hunting.zeiss.com



VIEW THE NIGHT IN DETAIL. ZEISS DTI 3/35 & DTI 3/25.



ZEISS DTI 3/25

Whether in wooded areas or at the bait site – this high-quality thermal imaging system offers a wide field of view of 26 meters at a range of 100 meters. Thanks to its outstanding optics, the ZEISS DTI 3/25 thus provides a perfect overview that reliably detects heat sources, especially at short distances.



The ZEISS DTI 3/25 offers an extremely wide field of view of 26 meters at 100 meters, making it ideal for hunting in wooded areas or at the bait site.



ZEISS DTI 3/35

Whether for observing and tracking or to more quickly and accurately identify game, this high-quality thermal imaging system ensures that hunters can precisely recognize details even at distances of more than 1,200 meters. As a result, the ZEISS DTI 3/35 gives hunters a considerable advantage when stalking at night or when hunting over long distances from a raised hide in a field.



Thanks to a range of up to 1,200 meters, the ZEISS DTI 3/35 is ideal for hunting from a raised hide in a field over long distances.



HOW TO USE ALL THE FEATURES OF THE ZEISS HUNTING APP



Share your hunting successes, document your hunting experiences, manage your hunting equipment, create ballistic profiles, and much more. The ZEISS Hunting App can be easily connected to all ZEISS thermal imaging clip-ons via WLAN (or Bluetooth, depending on the model).

Video tutorials showing how to use all the features of the ZEISS Hunting App can be found on YouTube:



TECHNICAL **SPECIFICATIONS**.

| | Thermal Imaging Camera | | | | | |
|--|--------------------------|-----------------------------------|--|--|--|--|
| Model | ZEISS DTI 3/35 | ZEISS DTI 3/25 | | | | |
| Optics | | | | | | |
| Focal length | 35 mm/F1.0 | 25 mm/F1.0 | | | | |
| Lens type | Gerr | nanium | | | | |
| Range | ~ 1,235 m | ~ 880 m | | | | |
| Eyepiece field of view in ° (subjective field of view) | Diagonal: 30.25° | Diagonal: 30.25° | | | | |
| Lens field of view in m at 100 m | Horizontal: 19 m | Horizontal: 26 m | | | | |
| Lens side field of view in ° (horizontal×vertical) | 10.7°×8° | 15°×11° | | | | |
| Optical magnification | 2.5× | 1.8× | | | | |
| Maximum digital zoom | | 4× | | | | |
| Zoom increments | In 0.5 × incremen | ts from 1.0×-4.0× | | | | |
| Sensor | | | | | | |
| Sensor resolution | 3843 | × 288 px | | | | |
| Sensor pixel pitch | 1 | 7 μm | | | | |
| Frame rate | 5 | 0 Hz | | | | |
| Display | | | | | | |
| Display resolution | 1,280×960 px | | | | | |
| Display type | LCOS | | | | | |
| Electronics | | | | | | |
| nterfaces | USB: charging WLAN: d | g + data transfer ata transfer | | | | |
| Battery | Lithi | um-ion | | | | |
| Battery life | | 10 h | | | | |
| External power supply | 5 V / 3 A , 9 V / 2 A | A, 12 V / 1.5 A (USB) | | | | |
| Internal memory | 1 | 5 GB | | | | |
| Video/photo/livestreaming feature | | yes | | | | |
| WLAN frequency | 2. | 4 Ghz | | | | |
| WLAN standard | IEEE 80 |)2.11 b/g/n | | | | |
| Connection to other devices | ZEISS Hunt | ting App/USB | | | | |
| General | | | | | | |
| Ingress protection rating | IP 66 (protection | against heavy rain) | | | | |
| Operating temperature range | -10 °C to +40 °C | (+14°F/+104°F) | | | | |
| Length × width × height | 193 mm × 60 mm × 65 mm | 187 mm × 60 mm × 65 mm | | | | |
| Weight | 450 g | 410 g | | | | |
| Order no. | 527010 | 527011 | | | | |

Subject to changes in design and scope of delivery as a result of ongoing technical development.

ZEISS 2022 / 2023 Hunting and Precision Shooting Catalog

FOCUSING ON THE ESSENTIALS.





Sensor







Display



Optical quality



Connectivity

Benefits





Range forest

Stalking/ forest

Main use





ZEISS Thermal Imaging Cameras

| ZEISS DTI 3/25 384×288 px 17 microns | 1.8× | 1,280 × 960 px HD LCOS | Fine, gradual zoom adjustment $1,0\times-4,0\times$ magnification in $0.5\times$ increments Perfect combination of magnification and detail recognition | Manage and share photos/videos Watch livestreamed hunting experiences | 26 m | 880 m | DTI 3/25 |
|---|------|---------------------------------|--|--|------|---------|----------|
| ZEISS DTI 3/35 384 × 288 px 17 microns | 2.5× | 1,280 × 960 px HD LCOS | Fine, gradual zoom adjustment 1,0 × - 4,0 × magnification in 0.5 × increments Perfect combination of magnification and detail recognition | Manage and share photos/videos Watch livestreamed hunting experiences | 19 m | 1,235 m | DTI 3/35 |

ZEISS Thermal Imaging Clip-Ons

| ZEISS DTC 3/25 384 × 288 px 12 microns | 1.0× | 1,024 × 768 px HD AMOLED | No digital zoom, riflescope magnification can be used | Digital zeroing assist Programmable and customizable via app (4 profiles) can be operated via app | 18.4 m | 1,300 m | DTC 3/25 |
|---|------|-----------------------------------|--|--|--------|---------|----------|
| ZEISS DTC 3/38 384 × 288 px 12 microns | 1.0× | 1,024 × 768 px HD AMOLED | No digital zoom, riflescope magnification can be used | Digital zeroing assist Programmable and customizable via app (4 profiles) can be operated via app | 12.3 m | 1,950 m | DTC 3/38 |

RIFLESCOPES FROM ZEISS

A PERFECT SIGHT. WITH THE RIGHT RIFLESCOPE.

As different as each individual's hunting experiences are, so are the demands that hunters place on their riflescopes. That's why the developers at ZEISS know that the perfect riflescope is the one that best suits the hunter's individual requirements.

Riflescopes have to accommodate different types of hunting and individual requirements in terms of weight, magnification, light transmission, field of view, usability, and image quality.

ZEISS has found the right answer to this challenge: various models that differ in performance and product characteristics in such a way that the company covers every hunting situation with this range. Despite all the differences, however, they have one essential thing in common: leading ZEISS quality.

No matter what challenges you face on the hunt, ZEISS has the right optical devices. Thanks to a selection of reliable top-quality products that can respond to individual needs and demands, you always have the optimal companion at your side: your ZEISS riflescope.

Further information is available on our website at www.zeiss.com/hunting/riflescopes



Riflescopes from ZEISS feature a wide range of advanced technologies and innovations. The following pages explain which products offer which specific features and benefits in detail. Here's an initial overview:

MAXIMUM PRECISION

Ultra-fine illuminated dot for minimal target subtension.

EXTREMELY **VERSATILE**

Different magnification ranges from $1.1 \times$ to an impressive $60 \times$ magnification.

A BRIGHT AND HIGH-CONTRAST VIEW

Thanks to an intelligent combination of the highest quality glass types, coatings, and state-of-the-art optical design.

EXCELLENT ERGONOMICS

Functional control elements and intelligent illuminated dot.

WEATHER RESISTANCE

Always a clear view thanks to a surface featuring our LotuTec® coating that repels dust, dirt, and water.







OUTSTANDING OPTICS FOR THE

HIGHEST DEMANDS.

ZEISS V8

The new generation of ZEISS V8 riflescopes helps hunters enjoy more successful moments on the hunt than any other riflescope from ZEISS thanks to the combination of sophisticated features and how they interact with each other perfectly. A riflescope has never been this flexible and versatile.

Outstanding optical quality, an extra-large eye box for fast target acquisition, and the ultrafine illuminated dot make them unsurpassed companions in any hunting situation. ASV Advanced LongRange rounds out the list of ZEISS V8 riflescopes' numerous features, achieving the longest possible shooting distances thanks to its wide adjustment range. This is how ZEISS V8 riflescopes always guarantee absolute precision and perfection – quality made in Germany for maximum hunting success.



The UFL concept combines selected premium lenses made from high-quality fluoride glass into a system that delivers extremely lifelike images and vibrant details.

Innovative technologies

Ergonomically designed multi-function button to control the illuminated dot combined with intelligent motion sensor technology to automatically activate the dot when the weapon is brought to bear.



Rapid target acquisition

An extra-large eye box helps hunters quickly and easily acquire targets, resulting in higher success rates in dynamic hunting situations.

Maximum performance meets elegant design

The center tube diameter of 30 or 34 mm offers a compact and mechanically sturdy design solution and more flexibility in reticle selection.

Unmatched long-range shooting performance

With an adjustment range of up to 140 cm and a click value of 1 cm/100 m per click, the ASV-Advanced LongRange (ASV-ALR) bullet drop compensation allows hunters to make corrections for precise targeting at long ranges.

ZEISS ZEISS 2022 / 2023 Hunting and Precision Shooting Catalog

THE MOST VERSATILE RIFLESCOPE. ZEISS V8.





Perfect sight on target.

- Outstanding optical quality.
- Maximum field of view and extra-large eye box for rapid target acquisition.
- Ultrafine illuminated dot easy and precise to operate.
- For shots at the maximum distance thanks to ASV-LongRange and ASV-Advanced LongRange.
- Stable and shot-proof ideally suited for use with clip-on attachments.



ZEISS V8 1.1-8 x 24

The V8 $1.1-8\times24$ gives the shooter more room to position their eye and makes target acquisition much faster – a decisive advantage on driven hunts.





ZEISS V8 1.8-14×50

Thanks to its large field of view of 23 meters at 100 meters at the lowest magnification, its outstanding optical quality with relaxed viewing capabilities, and its low weight, the V8 $1.8-14\times50$ is the perfect choice for any hunting situation.





ZEISS V8 2.8-20×56

The $20 \times$ magnification and optional bullet drop compensation make the V8 $2.8-20 \times 56$ excellent for long-range shooting.





ZEISS V8 4.8-35×60

With $35 \times$ magnification combined with optional bullet drop compensation, the V8 $4.8-35\times60$ represents the ultimate in long-range shooting performance.



OPTICAL EXPERTISE

Comfortable viewing


The eye box is the area where the hunter completely sees the entire image. In ZEISS riflescopes, it is particularly comfortable due to its size. This provides the hunter more room to position their eye and makes target acquisition much faster – a decisive advantage on driven hunts.





Viewing ZEISS riflescope

COMPARISON OF ZEISS V8 MODELS.

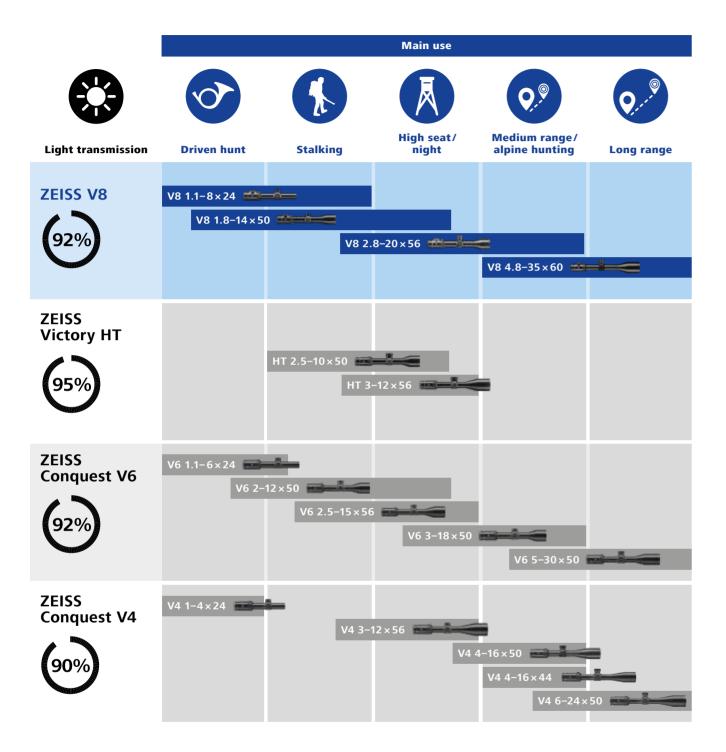


| ZEISS V8 riflescopes | s | V8 | | | | | | |
|--|-----------------------------|--------------|---------------|--------------|--------------|--|--|--|
| Model | | 1.1-8×24 | 1.8-14×50 | 2.8-20×56 | 4.8-35×60 | | | |
| Magnification | | 1.1×-8× | 1.8×-13.5× | 2.8×-20× | 4.8 ×-35× | | | |
| Effective lens diameter | | 10.6 – 24 mm | 18.6-50 mm | 27.5 – 56 mm | 48.1 – 60 mm | | | |
| Exit pupil diameter | | 9.9 – 3.1 mm | 10.3 – 3.7 mm | 9.9 – 2.8 mm | 9.9 – 1.7 mm | | | |
| Twilight factor | | 3.4-13.9 | 5.1-26 | 7.9-33 | 13.6-45.8 | | | |
| Field of view (100 m) | | 39.6-5.4 m | 23-3.1 m | 15.5 – 2.1 m | 8.6-1.2 m | | | |
| Objective viewing angle | ! | 22.2°-3° | 13.1°-1.8° | 8.8°-1.2° | 4.9°-0.7° | | | |
| Diopter adjustment rang | ge | -3.5/+2 D | | | | | | |
| Eye relief | | | 92 | mm | | | | |
| Parallax setting | | 100 m | | 50 m – ∞ | | | | |
| Vertical adjustment ran | ge at 100 m | 500 cm | 310 cm | 210 cm | 140 cm | | | |
| Windage adjustment ra | nge at 100 m | 320 cm | 200 cm | 135 cm | 85 cm | | | |
| Adjustment per click at | 100 m | | 1 | cm | | | | |
| Centre tube diameter | | 30 mm 34 mm | | | | | | |
| Eyepiece tube diameter | | 46 mm | | | | | | |
| Lens tube diameter | | 30 mm | 56 mm | 62 mm | 67 mm | | | |
| Coating | | LotuTec® | | | | | | |
| Nitrogen-filled | | Yes | | | | | | |
| Watertightness | | 400 mbar | | | | | | |
| Operating temperature | | -25°C/+50°C | | | | | | |
| Length | | 283 mm | 343 mm | 350 mm | 399 mm | | | |
| Selectable illuminated r | eticle | 54, 60 | 54, 60 | 43, 60 | 43, 60 | | | |
| Weight | without inner rail | 550 g | 720 g | 795 g | 995 g | | | |
| with illuminated reticle | with inner rail | 590 g | 750 g | 830 g | 1,015 g | | | |
| Order no. | without inner rail | 52 21 01- | 52 21 11- | 52 21 31- | 52 21 41- | | | |
| (XXXXXX-XXXX) | with inner rail | 52 21 00- | 52 21 10- | 52 21 30 | 52 21 40- | | | |
| Available | 43 | _ | _ | -9943- | -9943- | | | |
| illuminated reticle (xxxxxx-XXXX-xxx) | 54 | -9954- | -9954- | _ | _ | | | |
| | 60 | -9960- | -9960- | -9960- | -9960- | | | |
| Bullet Drop | without ASV | -000 | -000 | -000 | | | | |
| Compensation (ASV) | ASV (elevation) | _ | -040 | -040 | -04 | | | |
| (xxxxxx-xxxx- XXX) | ASV (elevation and windage) | _ | -050 | -050 | -05 | | | |
| Available ASV | | - | ASV-LR | ASV-LR | ASV-ALR | | | |
| | | | | | | | | |

Example of a complete order number for ZEISS V8 1.8–14×50 with inner rail, reticle 60 and ASV-LR (elevation): 522110-9960-040 Subject to changes in design and scope of delivery as a result of ongoing technical development.

An overview of all available reticles can be found on our website www.zeiss.com/hunting/reticles








FOR HUNTING IN LOW LIGHT.

VICTORY HT

The ZEISS Victory HT is the perfect companion for hunting in low light - thanks to a revolutionary optical concept and SCHOTT HT lenses.

ZEISS Victory HT demonstrates its strengths particularly in twilight and in high seat situations – here the riflescopes impress with a light transmission of 95% and more. This is achieved, among other factors, through the perfect interaction of SCHOTT HT lenses and the performanceenhanced ZEISS T* multicoating. Experience hunting in a new dimension – with the brightest lenses in the history of ZEISS.

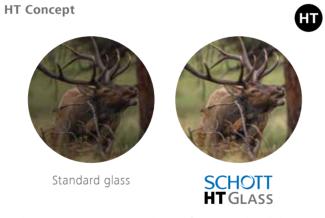

High-transmission SCHOTT lenses for optimal visibility in twilight and at night.




The combination of SCHOTT HT glass, ZEISS

T* multicoating, and the Abbe-König prism system results in light transmission of 95%







The Victory HT is ideally suited for use

VERSATILE AND BRIGHT. VICTORY HT.







See more than others.

- SCHOTT HT lenses for a bright and high-contrast view.
- ASV+ (can be added later) including nine ballistic rings to match your ammunition.
- Ultra-fine illuminated dot for minimal target subtension.
- Continuously adjustable illuminated dot with automatic shut-off.
- Stable and shot-proof ideally suited for the use of clip-on attachments.

OPTICAL EXPERTISE

Stable and shot-proof, even with clip-on attachments. In laboratory tests, ZEISS demonstrated that the ZEISS Victory V8, ZEISS Victory HT, ZEISS
Conquest V6, and ZEISS Conquest V4 exhibit the expected and necessary degree of stability required for use with clip-on devices. With a clip-on attachment, any ZEISS riflescope can be converted into a night vision or thermal imaging device.



HT 2.5-10×50

The versatile riflescope for all hunting applications – whether shooting on the move or from a raised hide, this riflescope is up to any hunting challenge thanks to the optional ASV+. The Victory HT's optical design really comes into its own in the twilight.





HT 3-12×56

The specialist for night hunting. Thanks to the use of SCHOTT HT glass, the brightest riflescope from ZEISS is perfect for use at night. Combined with the optional ASV+, the Victory HT ensures hunters are successful, even at long distances.







OPTICAL EXPERTISE

Ultrafine illuminated dot for minimal subtension and a reliable, ethical shot.

The ZEISS HT, V8, and V6 riflescopes feature an ultrafine illuminated dot. This keeps subtension low for a more accurate shot.

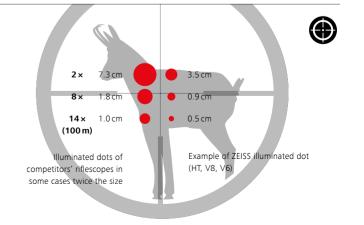

COMPARISON OF **VICTORY HT MODELS**.

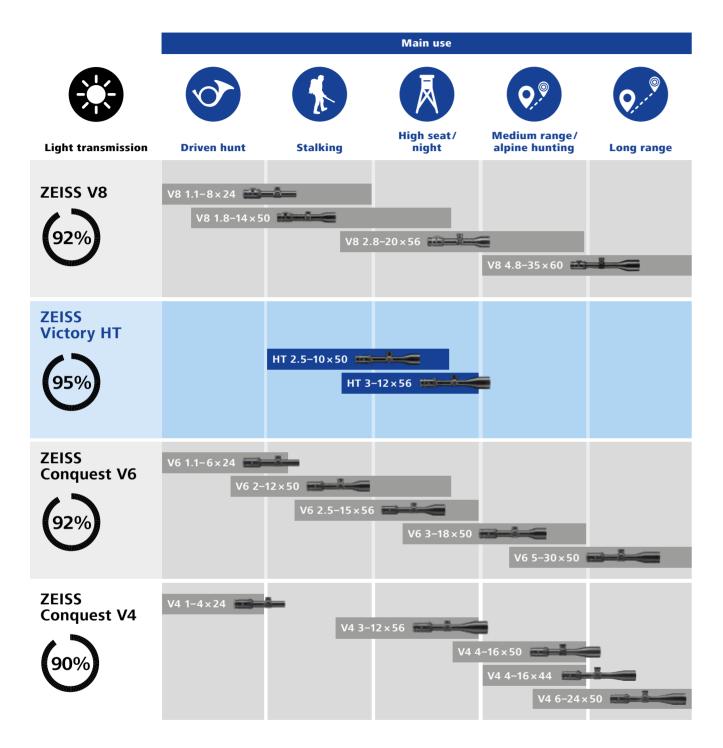

TECHNICAL **SPECIFICATIONS**.

| Victory riflescopes | | нт | | | | |
|--------------------------|-----------------------------|---------------|---------------|--|--|--|
| Model | | 2.5-10×50 | 3-12×56 | | | |
| Magnification | | 2.5×-10× | 3×-12× | | | |
| Effective lens diameter | | 37.7 – 50 mm | 44-56 mm | | | |
| Exit pupil diameter | | 15 – 5 mm | 14.9 – 4.7 mm | | | |
| Twilight factor | | 7.1 – 22.4 | 8.5-25.9 | | | |
| Field of view (100 m) | | 14.8-4.1 m | 12.5 – 3.5 m | | | |
| Objective viewing angle | ? | 8.5°-2.3° | 7.2°-2° | | | |
| Diopter adjustment rang | ge | -4/- | +2 D | | | |
| Eye relief | | 90 | mm | | | |
| Parallax setting | | 100 | 0 m | | | |
| Vertical adjustment ran | ge at 100 m | 140 cm | 120 cm | | | |
| Windage adjustment ra | nge at 100 m | 140 cm | 120 cm | | | |
| Adjustment per click at | 100 m | 1 cm | | | | |
| Centre tube diameter | | 30 mm | | | | |
| Eyepiece tube diameter | | 42 mm | | | | |
| Lens tube diameter | | 56 mm | 62 mm | | | |
| Coating | | LotuTec® | | | | |
| Nitrogen filling | | Yes | | | | |
| Watertightness | | 400 | mbar | | | |
| Operating temperature | | -25 °C/+50 °C | | | | |
| Length | | 321 mm | 347 mm | | | |
| Selectable illuminated r | eticle | 60 | 60 | | | |
| Weight | without inner rail | 525 g | 573 g | | | |
| with illuminated reticle | with inner rail | 550 g | 598 g | | | |
| Order no. | without inner rail | 52 24 25- | 52 24 35- | | | |
| (XXXXXX-XXXX-XXXX) | with inner rail | 52 24 24- | 52 24 34- | | | |
| Available CMMs | 43 | _ | _ | | | |
| illuminated reticle | 54 | _ | _ | | | |
| (XXXXXX-XXXX-XXX) | 60 | -9960- | -9960- | | | |
| Bullet Drop | without ASV | -000 | -000 | | | |
| Compensation (ASV) | ASV (elevation) | -010 | -010 | | | |
| (XXXXXX-XXXX-XXXX) | ASV (elevation and windage) | -020 | -020 | | | |
| Available ASV | | ASV+ | ASV+ | | | |

Subject to changes in design and scope of delivery as a result of ongoing technical development.

An overview of all available reticles can be found on our website www.zeiss.com/hunting/reticles



FLEXIBILITY FOR EVERY HUNTING SITUATION. CONQUEST V6

With Conquest V6, ZEISS has set a new standard in the upper mid-range. Whether for sitting or stalking game, driven hunts or long-range shooting – the riflescope with $6 \times$ zoom will impress you in any hunting situation. It combines legendary ZEISS quality with leading-edge technology and a robust, functional design – and it is excellent value for the money.

Light transmission of 92 %, modern multilayer coatings, and wide fields of view ensure that the ZEISS Conquest V6 provides outstanding optical quality and clarity every time. The premium lenses are protected by a black, matt anodized aluminum housing. The LotuTec® coating and optionally available ballistic turrets round out the package.



The combination of ZEISS T* multicoating and fluoride glass results in natural images.

Fast and precise

Optional ballistic turrets make it possible to stay aimed at the target for maximum hunting ranges. The large exit pupil supports rapid target acquisition.



Sharp and bright

Thanks to light transmission values of 92 %, the Conquest V6 is ideally suited for hunting from a raised hide and, thanks to the optional ballistic turrets, for shooting at long distances. The illuminated reticle features minimal subtension for highly accurate shots.

Intelligent and convenient

Reliable and rugged

in Germany.

The extremely rugged design and reliable mechanical components guarantee safe operation under all conditions. Quality made

Automatic activation and deactivation of the illuminated dot by the intelligent motion sensor technology extends the battery life and thus the operating time of the illuminated dot.

ZEISS

THE HIGH-PERFORMANCE RIFLESCOPE WITH 6 × ZOOM. CONQUEST V6.







A perfect view of the target.

- Outstanding optical quality.
- Maximum field of view and extra-large eye box for rapid target acquisition.
- Ultrafine illuminated dot easy and precise to operate.
- High ranges due to optionally available ballistic turrets.



V6 2.5-15×56

Thanks to high light transmission, the Conquest V6 is ideally suited for hunting from a raised hide and, thanks to the optional ballistic turrets, for shooting at long distances. The illuminated reticle features minimal subtension for highly accurate shots.





V6 1.1-6 x 24

On driven hunts, a large field of view ensures that hunters enjoy maximum visibility. Magnification up to $6.5\times$ gives hunters the necessary flexibility and intuitive operation ensures speed on the hunt. At higher magnification, game can still be properly identified and shot at medium range. This represents a clear advantage over simple red dot sights.





V6 2-12 x 50

This compact and versatile riflescope is a reliable companion in the hunting grounds. The Conquest $V6.2-12\times50$ is powerful into the twilight hours with its extremely fine illuminated dot and high magnification range.





V6 3-18×50

Versatile at medium to long range, this riflescope features a lightweight, slim design. It is also extremely reliable and easy to use. Optionally available with a ballistics turret. Compatible with reticle 6 and the ZBR-2/ZMOA-2 ballistic reticle.






V6 5-30×50

The Conquest V6 $5-30\times50$ offers high magnification for long-range shooting on the one hand and a large zoom range for maximum flexibility on the other. The lightweight, slim design is another advantage. Compatible with the ZBR-1/ZMOA-1 ballistic reticle as well as reticle 43.



COMPARISON OF **CONQUEST V6 MODELS**.

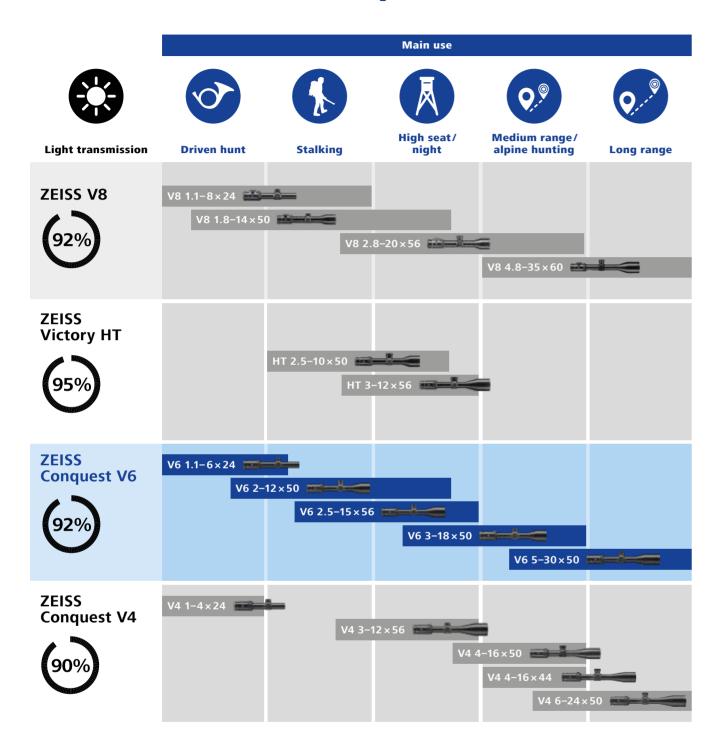

TECHNICAL **SPECIFICATIONS**.

| Conquest riflescopes | | | | V 6 | | | | |
|-----------------------------------|--|---------------|--------------|--------------|---------------|---------------|--|--|
| Model | | 1.1-6×24 | 2-12×50 | 2.5-15×56 | 3-18×50 | 5-30×50 | | |
| | | 1.1×-6.5× | 2×-12× | 2.5×-15× | 3×-18× | 5×-30× | | |
| Effective lens diameter | r | 10.5 – 24 mm | 19.4-50 mm | 24.3 – 56 mm | 28.6-50 mm | 47.3 – 50 mm | | |
| Exit pupil diameter | | 9.5 – 3.7 mm | 9.7 – 4.2 mm | 9.7 – 3.7 mm | 9.5 – 2.8 mm | 9.5 – 1.7 mm | | |
| Twilight factor | | 3.1-12.5 | 5.7-24.5 | 7.1 – 29.0 | 8.5-30.0 | 14.1-38.7 | | |
| Field of view (100 m) | | 38.1 – 6.6 m | 20.5-3.4 m | 16.4-2.7 m | 12.4 – 2.1 m | 7.4 – 1.2 m | | |
| Objective viewing ang | le | 21.6°-3.8° | 11.7°-2.0° | 9.4°-1.6° | 7.1° – 1.2° | 4.2°-0.7° | | |
| Diopter adjustment ra | nge | | | +2/-3 D | | | | |
| Eye relief | | | | 90 mm | | | | |
| Parallax setting | | 100 m | 100 m | 100 m | ∞ | ∞ | | |
| Adjustment range at 1 | 00 m | 300 cm | 250 cm | 200 cm | 300×170 m | 180×100 m | | |
| Adjustment per click a | t 100 m | | 1 cm | | 1/4 MoA (0 | 7 cm / 100 m) | | |
| Centre tube diameter | | | | 30 mm | • | | | |
| Eyepiece tube diamete | r | | | 45.5 mm | | | | |
| Lens tube diameter | | 30 mm | 56 mm | 62 mm | 56 mm | 56 mm | | |
| Coating | | LotuTec® | | | | | | |
| Nitrogen-filled | | Yes | | | | | | |
| Watertightness | | 400 mbar | | | | | | |
| Operating temperature | 2 | -25 °C/+50 °C | | | | | | |
| Length | | 290 mm | 335 mm | 352 mm | 338 mm | 380 mm | | |
| Weight | without inner rail | 505 g | 620 g | 690 g | 630 g | 740 g | | |
| Weight | with inner rail | 545 g | 655 g | 725 g | Not available | Not available | | |
| Order no. | without inner rail | 52 22 05- | 52 22 25- | 52 22 35- | 52 22 41- | 52 22 51- | | |
| (XXXXXX-XXXX-XXX) | with inner rail | 52 22 04- | 52 22 24- | 52 22 34- | _ | _ | | |
| Available | 60 | -9960- | -9960- | -9960- | _ | _ | | |
| Reticles | 20 | _ | _ | _ | -9906- | -9906- | | |
| (XXXXXX-XXXX-XXX) | 43 | _ | _ | _ | _ | -9943- | | |
| | ZMOA-2 | _ | _ | _ | -9994- | _ | | |
| | ZMOA-1 | _ | _ | _ | _ | -9993- | | |
| | ZBR-2 | _ | _ | _ | -9992- | _ | | |
| | ZBR-1 | _ | _ | _ | _ | -9993- | | |
| | without ASV | -000 | -000 | -000 | -000 | - | | |
| Bullet Drop Compensation (ASV) | Ballistic Turret | _ | -060 | -060 | _ | _ | | |
| (XXXXXX-XXXX-XXXX) | Ballistic Turret & External Windage | _ | _ | _ | -070 | -070 | | |

Example of a complete order number for Conquest V6 $2.5-15\times56$ with inner rail, reticle 60, and ASV (elevation): 522234-9960-060 Subject to changes in design and scope of delivery as a result of ongoing technical development.

An overview of all available reticles can be found on our website www.zeiss.com/hunting/reticles

RUGGED, COMPACT, AND PRECISE. **CONQUEST V4**

The Conquest V4 line of high-performance riflescopes combines the tried-and-true ZEISS optics concept with a rugged and functional design. The compact design and the balance between a large field of view and magnification are ideal for all types of hunting.

The V4 models are equipped with a $4 \times$ zoom and precise, absolutely reliable mechanical components. Special models have a ballistic turret with large reticle adjustment range (elevation and windage). This gives the shooter the necessary flexibility for different forms of hunting. Ballistic reticles are also optionally available to rapidly correct elevation and windage without any mechanical adjustment.


LotuTec®



Even in wet weather, there are impressive things to see during the hunt. ZEISS developed LotuTec® precisely for this purpose. This is a coating on the lenses that provides unobstructed visibility in all weather conditions.

HIGH-QUALITY OPTICS FOR RUGGED HUNTING USE.

Functional mechanical parts







Ballistic turret With the ballistic turret's wide reticle

adjustment range, the hunter has the flexibility needed for a variety of different hunting methods.



The ballistic reticles enable quick correction of elevation and windage.

Stable and shot-proof

The Conquest V4 is ideally suited for use with clip-on attachments.






V4 1-4×24

Has proven to be the perfect riflescope for short-range hunting and situations which require the hunter to rapidly acquire the target. At higher magnification, game can still be properly identified and shot at medium range. This represents a clear advantage over simple red dot sights.



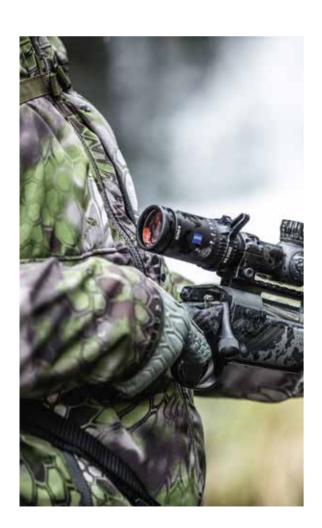



V4 3-12×56

This scope is suitable both for hunting from a blind as well as hunting long range. Thanks to the large-diameter lens and illuminated reticle, high accuracy is guaranteed – even in low light conditions.





V4 4-16×44

With its compact design, this riflescope is ideal for all forms of hunting thanks to the perfect balance between a large field of view and magnification.





V4 4-16×50

Thanks to its zoom range, this riflescope is the perfect choice for daily use over medium and long distances in difficult lighting conditions. The $16 \times zoom$ setting makes it easy to see every detail of the animal in order to accurately identify it.





V4 6-24×50

The $24 \times$ magnification and parallax compensation make this scope a specialist for precision shots.



ACCESSORIES



Neoprene Cover

When hunting, conditions can get a little tough. To better protect your riflescope from the elements, ZEISS offers the appropriate neoprene cover for ZEISS V8, V6, V4, and HT series riflescopes.



Throw Lever for ZEISS V8, Conquest V6, and V4
To quickly change magnification when it matters.


OPTICAL EXPERTISE



Stable and shot-proof, even with clip-on

attachments. In laboratory tests, ZEISS demonstrated that the ZEISS Victory V8, ZEISS Victory HT, ZEISS Conquest V6, and ZEISS Conquest V4 exhibit the expected and necessary degree of stability required for use with clip-on devices. With a clip-on attachment, any ZEISS riflescope can be converted into a night vision or thermal imaging device.

COMPARISON OF **CONQUEST V4 MODELS**.

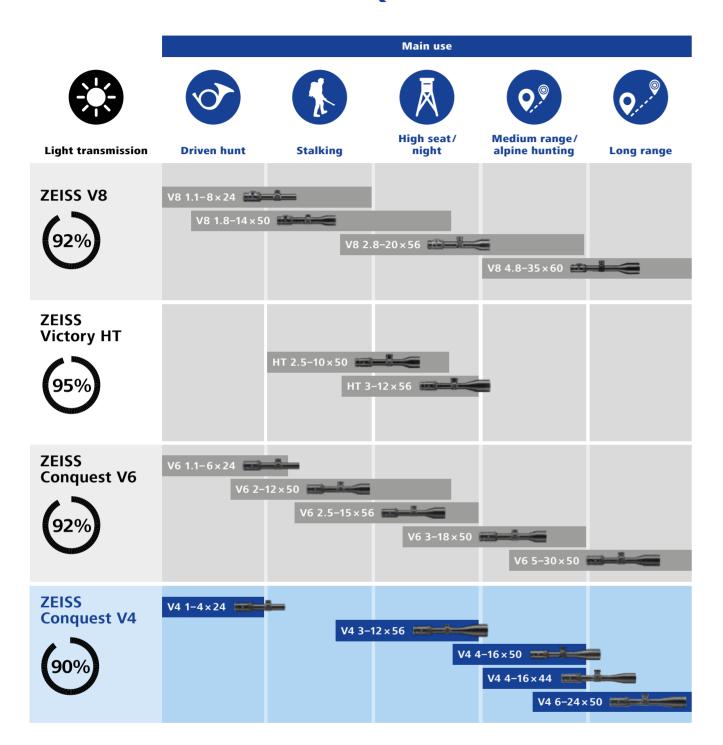

TECHNICAL SPECIFICATIONS.

| Conquest riflescopes | | | | V4 | | | |
|-----------------------------------|--|---------------|--------------|--------------|-------------------|--------------|--|
| Model | | 1-4×24 | 3-12×56 | 4-16×44 | 4-16×50 | 6-24×50 | |
| Magnification | | 1×-4× | 3×-12× | 4×-16× | 4×-16× | 6×-24× | |
| Effective lens diameter | r | 12.1 – 24 mm | 27.7 – 56 mm | 33.2 – 44 mm | 34.5 – 50 mm | 44.9 – 50 mm | |
| Exit pupil diameter | | 11.9 – 6 mm | 9.2 – 4.7 mm | 8.5-2.8 mm | 8.5 – 3.1 mm | 7.5 – 2.1 mm | |
| Twilight factor | | 3.5-9.8 | 9.1 – 25.9 | 11.5 – 26.5 | 11.7 – 28.3 | 16.4-34.6 | |
| Field of view (100 m) | | 38-9.5 m | 12.7 – 3.2 m | 9.5 – 2.4 m | 8.7 – 2.2 m | 6.3 – 1.6 m | |
| Objective viewing ang | le | 21.5°-5.4° | 7.2°-1.8° | 5.4°-1.4° | 5.4°-1.4° | 3.6°-0.9° | |
| Diopter adjustment ra | nge | | | +2/-3 D | | | |
| Eye relief | | | | 90 mm | | | |
| Parallax setting | | 91. | 4 m | | 9.1 m−∞ (10 yds−∞ |) | |
| Adjustment range at 1 | 00 m | 300 cm | 200 cm | | 230×175 cm | | |
| Adjustment per click a | t 100 m | 1.4 cm | | 1/4 MoA (0. | 7 cm / 100 m) | | |
| Centre tube diameter | | | | 30 mm | | | |
| Eyepiece tube diamete | r | | | 44 mm | | | |
| Lens tube diameter | | 30 mm | 62 mm | 50 mm | 56 mm | 56 mm | |
| Coating | | LotuTec® | | | | | |
| Nitrogen filling | | Yes | | | | | |
| Watertightness | | 400 mbar | | | | | |
| Operating temperature | e | -20 °C/+50 °C | | | -25°C/+50°C | -20°C/+55°C | |
| Length | | 256 mm | 368 mm | 356 mm | 368 mm | 368 mm | |
| Weight | without inner rail | 470 g | 610 g | 640 g | 652 g | 690 g | |
| Order no. | without illuminated reticle | _ | 522921- | 522931- | _ | 522951- | |
| (XXXXXX-XXXX-XXX) | with ring assembly | 522905- | 522925- | 522935- | 522945- | 522955- | |
| Available | 60 | -9960- | -9960- | -9960- | _ | -9960- | |
| reticles | 20 | _ | -9920- | -9920- | _ | _ | |
| (XXXXXX-XXXX-XXX) | ZMOA-2 | _ | _ | -9994- | _ | _ | |
| | ZMOA-1 | _ | _ | _ | _ | -9993- | |
| | ZMOAi-1 | _ | _ | _ | -9993- | -9993- | |
| | ZBR-2 | _ | _ | -9992- | _ | _ | |
| | ZBR-1 | _ | _ | _ | _ | -9991- | |
| | ZBi | _ | _ | -9968- | -9968- | -9968- | |
| | ZMOAi-20 | _ | _ | _ | _ | -9989- | |
| | ZMOAi-T20 | _ | _ | _ | _ | -9965- | |
| | ZMOAi-T30 | _ | _ | -9964- | -9964- | _ | |
| | without ASV | -000 | -000 | -000 | _ | _ | |
| Bullet Drop Compensation (ASV) | Ballistic Turret | _ | _ | -080 | -080 | -080 | |
| (xxxxx-xxxx-XXX) | Ballistic Turret & External Locking Windage | _ | _ | -090 | -090 | -090 | |

Example of a complete order number for Conquest V4 3–12×56 with inner rail, reticle 60: 522925-9960 Subject to changes in design and scope of delivery as a result of ongoing technical development.

An overview of all available reticles can be found on our website www.zeiss.com/hunting/reticles

FOCUSING ON THE ESSENTIALS.





Light





illuminated dot



Reticles



Mounting

Ring and inner rail





Stalking

HT 2.5-10×50

V6 2.5-15×56

V6 2-12×50

Driven hunt

V6 1.1-6×24

V4 1-4×24

V8 1.1-8×24

V8 1.8-14×50



V8 4.8-35×60

V6 5-30×50

V4 6-24×50

V4 4-16×50

V4 4-16 × 44



night

V8 2.8-20×56

HT 3-12×56

V4 3-12×56

V6 3-18×50 🚃

ZEISS V8

transmission





Optical quality



Ability to directly check shooting distances

ASV

Can be upgraded with ASV

9 ballistic rings

available standard

1

Ability to directly check

Optimized multifunctional button, can be used with both hands

Continuously variable illuminated dot brightness control

Ultrafine illuminated dot for minimal target subtension

Automatic shutoff with position sensor

Reticle 60

Reticle 43 Stable and steady Reticle 54 during shots when used with thermal imaging attachments (up to 2,000 g weight)

Continuously variable

shooting distances target subtension

with ASV

Multifunctional button

illuminated dot brightness control

Can be upgraded

Ultrafine illuminated dot for minimal

Reticle 60

during shots when used with thermal imaging attachments

Ring and inner rail

Stable and steady

(up to 2,000 g weight)

Ring and inner rail

(up to 2,000 g weight)

Automatic shutoff

ZEISS Conquest V6

ZEISS Victory HT









Multiple revolutions of the turret for high-precision shots at maximum distances

Can be upgraded with ASV

Multifunctional button

10-step illuminated

dot brightness control

Continuously variable illuminated dot

Automatic deactivation position sensor

Multifunctional button

brightness control

Ultrafine illuminated dot for minimal target subtension

Reticle 6 (Z-Plex) Reticle 43

(non-illuminated) Reticle 60

7ΜΟΔ-1 ZMOA-2 ZMOA-4 ZBR-1

Stable and steady during shots when used with thermal imaging

attachments

ZBR-2

Reticle 20 (Z-Plex)

Reticle 60 7ΜΟΔί-1 ZMOA-1 ZMOA-2

ZBR-1 ZBR-2 ZBi ZMOAi-20

ZMOAi-T20

ZMOAi-T30 ZMOA-T30

Stable and steady during shots when used with thermal imaging (up to 2,000 g weight)

of the turret for high-precision shots at maximum distances

Multiple revolutions

Can not be upgraded

with ASV

Fluoride glass and SCHOTT glass for natural images and optimal target resolution.



UFL Concept

System of selected premium lenses made from high-quality flouride glass for extremely lifelike images and vibrant details.

including diagrams can be found on the

ZEISS Conquest V4











High-transmission SCHOTT lenses for optimal sighting and target resolution in low-light conditions.



For fast and easy lens cleaning.





Multicoating for sharp, high-contrast images.

An overview on the subject of reticles

ZEISS ZEISS 2022 / 2023 Hunting and Precision Shooting Catalog















ÆISS

FOR DECISIONS THAT REQUIRE MAXIMUM PRECISION.

Reticle for ZEISS riflescopes

ZEISS works constantly on the development of reticles, consistently sets new standards, and impresses with incomparably high levels of precision.

Standard non-illuminated reticle

Non-illuminated reticles are versatile and precise. They are ideal for hunting situations from excellent light conditions to light twilight. In addition, non-illuminated reticles can be used to measure distances – the finely spaced intervals of the reticle bars can be used to determine practical information about the distance to the game being hunted.

Illuminated reticle

Depending on how bright the illuminated dot or crosshair is, ZEISS riflescopes can be divided into two fundamentally different types of illuminated reticles:

Versions with a very bright illuminated dot are illuminated reticles suitable for daytime and twilight use. These are found in the Victory HT models, the Conquest V6, and the V4, among others, and they are particularly good for quickly acquiring the target when hunting moving game. The second group of illuminated reticles from ZEISS is designed for twilight. The Victory HT models and the ZEISS V8 feature finely-dimmable illuminated dots. These can be perfectly adapted to the lighting conditions, which change considerably with the onset of twilight. If the illuminated dot or illuminated crosshairs were too bright, they would illuminate the target too much in the faint twilight. As such, these illuminated reticles offer the ability to perfectly adjust the brightness, either manually or even automatically, assisted by the riflescope.

ACCESSORIES



Sunshades

Protect against blinding light on extremely sunny days.



Bullet Drop Compensator (ASV)

For ZEISS V8 and Conquest V6 ballistic turrets.

Available with new riflescopes or can be added later.

RETICLES FROM ZEISS (ILLUMINATED)



Reticle 43For ZEISS V8



Reticle 54
For ZEISS V8



Reticle 60

For ZEISS V8, HT, Conquest V6, V4



Reticle ZMOAi-T30 (64)

For Conquest V4



Reticle ZMOAi-T20 (65)

For Conquest V4



Reticle ZBi (68)

For Conquest V4



Reticle ZMOAi-20 (89)

For Conquest V4



Reticle ZMOAi-1 (93)

For Conquest V4



Reticle ZMOA-4 (95)

For Conquest V6



Reticle ZF-MOAi (17)

For LRP S5



Reticle ZF-MRi (16)

For LRP S5

RETICLES FROM ZEISS (NON-ILLUMINATED)



Reticle 6

For Conquest V6



Reticle 20 (Z-Plex)

For Conquest V4



Reticle 43

For Conquest V6



Reticle ZMOA-T30 (64)

For Conquest V4



Reticle ZBR-1 (91)

For Conquest V6, V4



Reticle ZBR-2 (92)

For Conquest V6, V4



Reticle ZMOA-1 (93)

For Conquest V6, V4



Reticle ZMOA-2 (94)

For Conquest V6, V4



NEW OPTICAL DEVICES FROM ZEISS FOR TARGET SHOOTERS.

The reticle in the riflescope can be positioned in the first or in the second image plane. But which option is best suited to which application? The difference between the first focal plane and the second focal plane can be seen when changing the magnification or in the amount of subtension.



The reticle in the first focal plane


A reticle in the first focal plane (in front of the inverting system) changes in the same way as the actual image. The reticle and the image combine to form a single unit, the size of both increasing or decreasing in the same way. As a result, the subtension remains constant at all magnifications, making it easy to estimate the range.

An additional property becomes evident in poor lighting: the bars and lines become wider at higher magnification, making them easier to see. Due to the simultaneous magnification of the reticle and image, the shooter always has all relevant reference numbers in view in order to shoot accurately – the ideal conditions for target shooters and competitions.

The reticle in the second focal plane


In riflescopes with the reticle in the second focal plane, the reticle is behind the inverting system, i.e., in the image plane on the eyepiece side. When the magnification changes (zoom), it does not affect the reticle, which remains constantly fine with minimal subtension — a major benefit when taking long-range shots at high magnification. However, the subtension of the reticles in the second focal plane now depends on the magnification setting. The lower the magnification (the smaller the image), the higher the subtension.

Placing the reticle in the second focal plane is more technically challenging and critical than in the first plane. The moveable parts of the inverting system must be manufactured with extremely tight tolerances to ensure that the image does not unintentionally move up or down when it is enlarged. Because the reticle is fixed in the second focal plane, it would lead to considerable deviations in the point of impact in such cases. Thanks to state-of-the-art manufacturing processes with minimal tolerances, ZEISS can also deliver maximum reliability in this regard across all riflescope classes.

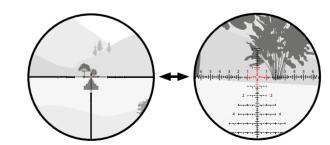

Reticle in the first focal plane (on the objective side):

A change in magnification changes the view of the target and reticle at the same time, i.e., the proportions and subtension remain constant.

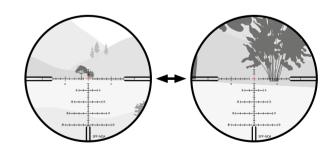

Reticle in the second focal plane (on the eyepiece side):

Changing the magnification only changes the view of the target. The reticle remains unchanged. The subtension changes with the magnification.



HIGH-PERFORMANCE OPTICS FOR **PRECISION SHOOTING.**

ZEISS LRP S5

ZEISS has introduced the LRP S5, a completely new long-range precision (LRP) riflescope that was developed specifically for precision shooting and also impresses hunters with its maximum accuracy at long distances.

The ZEISS LRP S5 318-50 and 525-56 models represent the pinnacle of precision riflescopes available today – and made in Germany, of course. Both models feature a quick-focus eyepiece, a ballistic turret with locking function, and an external windage adjustment that can also be locked in place. The MRAD (milliradian) and MOA (minute of angle) reticles feature extremely fine lines with an open center area and an illuminated dot suitable for daylight use.


High-performance optics



Premium optical design with SCHOTT glass, fluoride glass elements, and T* coatings result in ideal target recognition, target resolution, and maximum light transmission of 90%. The LotuTec® coating ensures shooters have a clear view even in wet weather.

Daylight visible illuminated reticle

Digitally controlled diffractive reticle illumination technology delivers an exceptionally bright illuminated dot regardless of the incident light – allowing you to reliably verify the exact position of the shot on the target. The intensity is continuously adjustable.



Best-in-class total elevation travel
Thanks to the massive total elevation travel of
40.7 MRAD or 140 MOA, the ZEISS LRP S5 can be

used to reliably hit targets at a distance of 1,400

meters or more.



designed ballistic turrets offer maximum reliability, even in stressful competitive

situations.

Reticle in first focal plane

Highly intuitive design with etched and detailed graduated chrome structures. Numerical indicators and reference marks enable precise, fast aiming at the target.

Side parallax adjustment

With a setting of 25 m to infinity – larger diameter for ideal control.

MASTERFUL **PRECISION**. **ZEISS LRP S5**.







Maximum precision for competitions and hunting.

- Premium optical design.
- Best-in-class total elevation travel 40.7 MRAD/140 MOA.
- Exceptionally tactile ballistic towers for high repeatability.
- Quality "Made in Germany" with the highest quality materials.



S5 318-50

With its extremely large field of view, the ZEISS LRP S5 318-50 is ideal for target shooting and hunting at longer distances. The high-precision scope is the preferred choice for rifle platforms that require more compact optics with excellent performance characteristics.





S5 525-56

The riflescope is perfect for long-range shooting competitions and is an excellent choice for a variety of rifle platforms. With a higher magnification setting, the ZEISS LRP S5 525-56 is also ideal for target shooting, ammunition testing, ammunition development, and hunting at long ranges.



Turrets



Elevation Turret

The turret incorporates a mechanically lifting design that allows for multi-turn functionality, with more than four complete rotations of total elevation adjustment value. Depending on the configuration of the scope, the adjustment values on the turret are indicated in milliradians (MRAD) or minutes of angle (MOA).





MRAD

MOA

External Locking Windage Turret (ELWT)


The turret incorporates a multi-turn functionality, with approximately two complete rotations of total windage adjustment value. The locking function protects the turret against accidental adjustment.

68 69

ZEISS FFP RETICLES

MILLIRADIAN: ZF-MRI.


The ZF-MRi reticle was designed specifically for competitions. The milliradian (MRAD) reticle incorporates a "tree-style" primary structure with useful hash marks, dots, and reference numbers – without the clutter. The points of aim and holds are represented in 0.02, 0.05, and 1.0 MRAD increments; and even numbers are displayed for fast and intuitive visual reference.

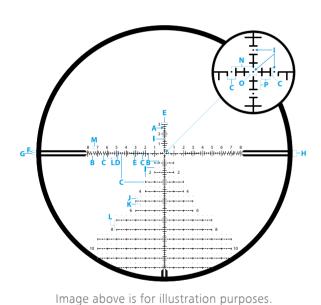


| LRP S5 | 318-50 | 525-56 | |
|------------------|--------|--------|--|
| Unit of measure | MF | MRAD | |
| Line thickness A | 0.04 | 0.03 | |
| Distance B | 0 | 0.1 | |
| Distance C | 0 | 0.2 | |
| Distance D | 0 | 0.4 | |
| Distance E | 0 | 0.6 | |
| Distance F | 0 | 0.2 | |
| Distance G | 0 | 0.2 | |
| Distance H | 0 | 0.6 | |
| Dot size I | 0.05 | 0.04 | |


| Distance J | 0.2 |
|------------------------|-----|
| Distance K | 0.5 |
| Distance L | 1.0 |
| Standard number size M | 0.3 |
| Distance N | 0.5 |
| Distance O | 0.2 |
| Distance P | 0.2 |
| Distance Q | 0.9 |
| Distance R | 1.2 |
| Distance S | 1.8 |

ZEISS LRP S5 318-50 and 525-56 ZF-MRi reticle comparison










ZEISS FFP RETICLES

MINUTE-OF-ANGLE: ZF-MOAI.

ZEISS LRP S5 318-50 and **525-56 ZF-MOAi** reticle comparison




 $@3,6 \times$









The ZF-MOAi reticle was designed with precision shooting and longrange hunting in mind. This is a great reticle for the most challenging shots in the field and on the range. The clean and clutter-free reticle utilizes hash marks that represent 1 MOA (minute of angle); even numbers are displayed for fast, intuitive visual reference. The windage dots below centerline are placed at 2 MOA increments so that you can easily confirm the wind's influence on the bullet's impact down-range. The floating center point of aim provides a precise hold on the most difficult targets.

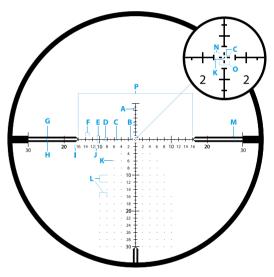


Image above is for illustration purposes.

| LRP S5 | 318-50 | 525-56 |
|------------------|--------|--------|
| Unit of measure | M | оА |
| Line thickness A | 0.125 | 0.1 |
| Distance B | 0.5 | |
| Distance C | 0. | 25 |
| Distance D | 1. | .0 |
| Distance E | 2.0 | |
| Distance F | 1.0 | |
| Distance G | 0.5 | |
| Distance H | 0.5 | |
| | | |

| Standard number size I | 0.75 |
|------------------------------------|-------|
| 10, 20, 30 number size J | 1.0 |
| Dot size K | 0.125 |
| Dot spacing L | 2.0 |
| Distance M | 1.5 |
| Spacing around center crosshairs N | 0.5 |
| Distance O | 1.0 |
| Distance P | 32 |
| Distance Q | 2.0 |
| Distance R | 3.0 |
| Distance S | 4.0 |

70 71


TECHNICAL **SPECIFICATIONS**.


| Riflescopes | LRP S5 | | |
|------------------------------------|--|---------------------|--|
| Model | 318-50 | 525-56 | |
| Light transmission | 90% | | |
| Magnification | 3.6×-18× | 5×-25× | |
| Reticle focal plane | First focal plane (FFP) | | |
| Effective lens diameter | 50 mm 56 mm | | |
| Exit pupil diameter | 9.3 – 2.8 mm | 9.2 – 2.4 mm | |
| Twilight factor | 13.4-30 | 16.7 – 37.4 | |
| Field of view (100 m) | 10.0 – 2.0 m / 100 m | 7.5 – 1.5 m / 100 m | |
| Objective viewing angle | 5.7°-1.1° | 4.3°-0.8° | |
| Diopter adjustment range | +2/-3 D | | |
| Eye relief | 90 mm | | |
| Parallax setting | 25-∞m | | |
| Vertical adjustment range at 100 m | 40.7 MRAD/140 MOA | | |
| Windage adjustment range at 100 m | 17.45 MRAD/60 MOA | | |
| Adjustment per click at 100 m | 0.1 MRAD/0.25 MOA | | |
| Centre tube diameter | 34 mm | | |
| Eyepiece tube diameter | 46 mm | | |
| Lens tube diameter | 56 mm | 62 mm | |
| Lens thread | M54×0.75 mm | M60×0.75 mm | |
| Coating | LotuTec® and T* | | |
| Nitrogen filling | Yes | | |
| Watertightness | 400 mbar | | |
| Operating temperature | -25 °C/+55 °C | | |
| Length | 331mm | 396 mm | |
| Weight | 930 g | 1,030 g | |
| Reticles | ZF-MRi (milliradian) / ZF-MOAi (minute of angle) | | |

TECHNICAL **SPECIFICATIONS**.

| Riflescopes | | LRP S5 | |
|-------------|------|-------------------|-------------------|
| Model | | 318-50 | 525-56 |
| 0-1 | MRAD | 52 22 75-9916-090 | 52 22 95-9916-090 |
| Order no. | MoA | 52 22 65-9917-090 | 52 22 85-9917-090 |

Subject to changes in design and scope of delivery as a result of ongoing technical development.

















Ballistic stop





Operating the illuminated dot



Tilt sensor – illuminated dot switched off when setting or laying down the weapon Automatic shutoff after 4 hours




First focal plane

Smart reticles

ZF-MOAi ZF-MRi

Reticles







Main use



Target shooting Long-range shooting Long-range hunting Mounting LRP S5 318-50 📻 34 mm rings LRP S5 525-56

AN UNPARALLELED VIEW. WITH OUR BINOCULARS.

Binoculars from ZEISS have a reputation that precedes them. Their optical performance, ease of use, ruggedness, optimized weight and ongoing technical innovations that have continually pushed the boundaries of what is possible have continued to shape this reputation over the years.

So it is no wonder generations of nature lovers swear by "their" ZEISS binoculars. They have become a reliable companion on countless tours and unique experiences, and are often passed down from generation to generation – along with the stories they have told. Many "historic" ZEISS binoculars are still in daily use today. But time doesn't stand still.

Today, ZEISS offers devices of outstanding quality for a plethora of requirements, from special binoculars for hunting at night to compact binoculars for daily use.

Learn more about the unique benefits of our various binoculars, their areas of specialty, and their performance on the following pages.

Further information is available on our website at www.zeiss.com/hunting/binoculars



Binoculars from ZEISS feature a wide range of advanced technologies and innovations. The following pages explain which products offer which specific features and benefits in detail. Here's an initial overview:

TRANSMISSION VALUES

Always the right binoculars – even in poor lighting conditions thanks to our HT Concept with up to 95 % light transmission.

WEATHER RESISTANCE

Nature observation in any weather thanks to the LotuTec® coating.

RUGGED **DESIGN**

Reliable on-the-go use with durable materials like a magnesium housing and features like th TripleLink bridge.

OUTSTANDING **ERGONOMICS**

Fatigue-free observation thanks to our SmartFocus Concept, ErgoBalance Concept, and ComfortFocus Concept.

UNFORGETTABLE **EXPERIENCES**

Exceptional visual quality and optical clarity thanks to innovative technologies such as our UFL Concept, ZEISS FieldFlattener technology, and T* multicoating.

A PERFECT **OVERVIEW**

Impressively wide fields of view.







SMART FOCUS

WITH SUPERIOR FIELD OF VIEW.

VICTORY SF

Victory SF binoculars from ZEISS allow you to experience the most exciting hunting moments.

ZEISS Victory SF binoculars are the most versatile premium binoculars in the 175-year history of ZEISS. Their optical perfection, impressive field of view, revolutionary ergonomics, and lightweight design make Victory SF binoculars extremely versatile for use in any conditions. In other words, they are an expression of everything that ZEISS stands for: unparalleled leading-edge optics.

SmartFocus Concept







Competitor example


ZEISS Victory SF

Only 1,6/1,8 revolutions


The SmartFocus Concept ensures that the focusing wheel is perfectly positioned. This ensures that you can focus quickly and precisely, even when observing for hours on end.

Fast focusing

SmartFocus Concept for intuitive, precise, rapid focusing thanks to an ergonomic finger position.



The impressively wide fields of view of both SF models give you a good overview in unclear terrain and help you find exactly the target you are looking for.

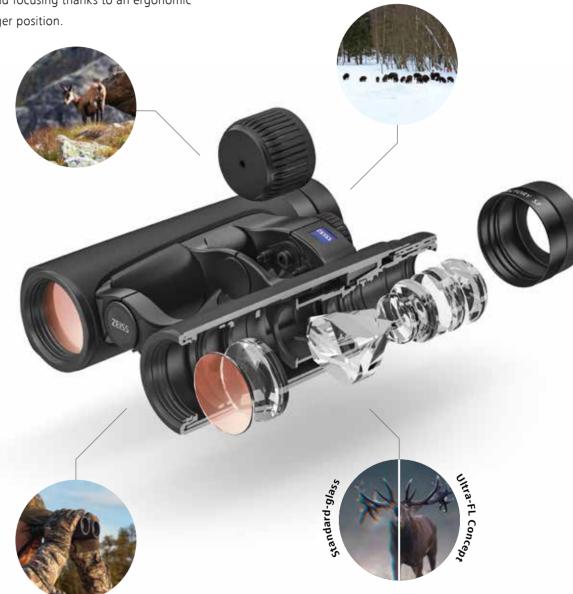

Perfect ergonomics

The SF models' center of gravity has been shifted closer to the eyepiece thanks to the ErgoBalance Concept, allowing for long and fatigue-free observation.

Exceptional viewing experience

The UFL Concept combines selected premium lenses with high-quality flouride glass into a system that delivers extremely lifelike images and vibrant details.

ZEISS ZEISS ZEISS 2022 / 2023 Hunting and Precision Shooting Catalog

ZEIS

76 77

HUNTING OBSERVATION – MADE EASY. VICTORY SF 32.



See more than others.

- An extremely wide field of view enlarges the observable area by up to 20% and thus up to 155 meters at a distance of 1,000 meters.
- 90 % light transmission.
- Vibrant details and lifelike images thanks to the UFL Concept.
- Compact design and ErgoBalance Concept for long and comfortable nature observation.
- Weighing just 600 grams, much lighter than other binoculars.



SF 8/10×32

The SF 32 models feature vibrant, true-to-life color rendering, an extended field of view, and an ergonomic design for longer, fatigue-free viewing.



IDEAL VISIBILITY INTO THE TWILIGHT HOURS. VICTORY SF 42.









SF 8/10×42

In addition to outstanding optical performance, the SF 42 model offers perfect ergonomics – the focusing wheel, which is perfectly positioned thanks to the SmartFocus Concept, enables fast and precise focusing.



The best for every situation.

- 92 % light transmission.
- Vibrant details thanks to the UFL Concept.
- Exceptionally wide field of view of up to
 148 meters at a distance of 1,000 meters.
- ZEISS FieldFlattener technology: extreme edge sharpness, even at wide fields of view.
- Perfect ergonomics and ruggedness thanks to TripleLink bridge and lightweight design with state-of-the-art magnesium materials.
- Minimum object distance of 1.5 meters for exploring the smallest details.

VICTORY SF AND SFL.

DISCOVER MORE AND EXPERIENCE LONGER.

Superior field of view

Extremely wide field of view compared to many competitors for an even better overview in the field.




Increases the observable range by up to 20 % compared to other binoculars



ErgoBalance Concept

Ideally balanced for long, steady viewing with less strain on the upper and lower arm muscles.



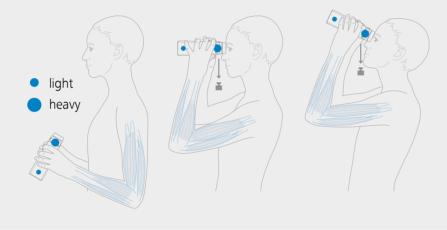



ZEISS FieldFlattener Technology

Extreme edge sharpness even at wide fields of view.





Ultra-FL Concept

Vibrant details and lifelike images thanks to a system of selected premium lenses and high-quality flouride glass.






Standard glass

SCHOTT HT GLASS

HT Concept

High-transmission SCHOTT glass for optimal visibility in low light.





Ultra-HD Concept

Maximum detail visibility and color fidelity thanks to optimizations in coating and optical design.





LotuTec® Dirt-repellent and extremely easy-to-clean lenses.





T* Multi-layer coating Multi-layer coating for sharp and high-contrast viewing.

















ZEISS Victory SF

ZEISS SFL























SMART FOCUSING AND LIGHTWEIGHT. ZEISS SFL

The new ZEISS SFL binoculars make it possible to experience exciting hunting moments with a new level of ease. Optimized for a light weight and compact size in every aspect and available in two different models, they perfectly complement the other binoculars in the ZEISS SF family.

The new UHD Concept for natural colors, the unique ergonomics, and the SmartFocus Concept ensure the binoculars deliver outstanding visual quality and an immersive viewing experience. The lightweight magnesium housing ensures that the binoculars are durable and long-lasting – for generations to come.

Extremely lightweight



The reduced lens diameter and more compact arrangement of even thinner lens elements make the SFL models **up to 30 % lighter** than comparable binoculars.

SmartFocus Concept

The perfectly positioned focusing wheel allows you to focus quickly and precisely – without having to spread your fingers apart.



Perfect ergonomics

The large exit pupil allows users to quickly and easily position their eye for a comfortable and immersive viewing experience. Improved eyecups for an even better ergonomic feel.

Superior optical performance

Ultralight, compact design

the Victory SF 42.

The lightweight magnesium body and reduced lens diameter combined with the closer spacing

make the SFL 19 % lighter and 17 % shorter than

The new UHD Concept delivers maximum detail visibility and color fidelity thanks to optimized coating and optical design.

ZEISS ZEISS 2022 / 2023 Hunting and Precision Shooting Catalog

HUNTING

HAS NEVER BEEN EASIER.

ZEISS SFL 40.







SFL 8/10×40

The perfect ergonomics of the SFL 40 models, the ultralight design, the UHD Concept, and the SmartFocus Concept make handling easy and precise while still providing the highest level of detail recognition, even when observing for hours on end.



Carefree observation.

- A viewing experience rich in detail with natural colors thanks to the UHD Concept.
- 90 % light transmission.
- The large exit pupil allows users to quickly and easily position their eye for a comfortable and immersive viewing experience.
- Ultralight, compact design featuring the SmartFocus Concept.
- A clear view at all times thanks to our LotuTec® coating.



your equipment.

SUCCESSFUL BUCK HUNTING.

THE BEST FOR EVERY SITUATION.

In addition to hunting skills and good preparation, choosing the right equipment plays an

essential role in successful hunting. The size and weight of the equipment play a critical role

Compact binoculars like the Victory SF and SFL models offer a clear advantage in this regard,

because thanks to their perfect ergonomics, you can focus entirely on the hunt – and not on

VICTORY SF AND SFL

in your ability to successfully stalk game.

COMPARISON OF VICTORY SF AND SFL.

Main use V Light Optical High seat/ Outdoor/ Birding/ nature observation transmission quality recreation Stalking **ZEISS Victory SF** SF 8 × 42 SF 10×42 SF 8 × 32 SF 10×32 SF 32 **ZEISS SFL** SFL 8×40 90% SFL 10×40 **ZEISS Victory HT ZEISS Victory Pocket** Pocket 8×25 Pocket 10×25 **ZEISS Conquest HD** HD 8×42 HD 10×42 HD 8×32 HD 10×32 **ZEISS Terra ED / Pocket** ED 8×42 ED 10×42 ED 8×32 ED 10×32 Pocket 8×25 *Hydrophobic and antireflective coating.

TECHNICAL **SPECIFICATIONS**.

| Victory binoculars | | S | F | | SF | 1 |
|---|----------------|----------|----------|----------|----------------|----------|
| Model | 8×32 | 10×32 | 8×42 | 10×42 | 8×40 | 10×40 |
| Light transmission | 90 |) % | 92 | % | 90 9 | % |
| Magnification | 8× | 10× | 8× | 10× | 8× | 10× |
| Lens diameter | 32 | mm | 42 | mm | 40 m | ım |
| Exit pupil diameter | 4 mm | 3.2 mm | 5.3 mm | 4.2 mm | 5 mm | 4 mm |
| Twilight factor | 16 | 17.9 | 18.3 | 20.5 | 17.9 | 20 |
| Field of view (1,000 m) | 155 m | 130 m | 148 m | 120 m | 140 m | 115 m |
| Angular field of view, real | 67° | 69° | 64 | 4° | 60° | 62° |
| MOD | 1.9 | 95 m | 1.5 | 5 m | 1.51 | m |
| Diopter adjustment range | | +/- | -4 D | | +/-4 D | |
| Exit pupil distance | 19 | mm | 18 mm | | 18 mm | |
| Interpupillary distance | 54- | 76 mm | 55-7 | '6 mm | 52 – 74 mm | |
| Lens type | U | UFL | | FL | UHI | D |
| Prism system | Schmidt-Pechan | | Schmidt | -Pechan | Schmidt-Pechan | |
| Coating | | LotuTec® | | | LotuT | ec® |
| Nitrogen filling | | Υ | es | | Yes | 5 |
| Watertightness | | 400 | mbar | | 400 m | bar |
| Operating temperature | | −30 °C | /+63 °C | | -20°C/- | +55 °C |
| Length | 152 mm | 150 mm | 173 | mm | 144 mm | |
| Width at an interpupillary distance of 65 mm | 112 | !mm | 125 | mm | 114 n | nm |
| Weight | 600 g | 590 g | 79 | 0 g | 640 | g |
| Order no. | 52 32 24 | 52 32 25 | 52 42 23 | 52 42 24 | 52 40 23 | 52 40 24 |

Subject to changes in design and scope of delivery as a result of ongoing technical development. More information can be found online at www.zeiss.com/consumer-products


ACCESSORIES



Air Cell Comfort Straps

The carrying strap makes carrying binoculars with a lens diameter of 30 mm or more much more comfortable. The enclosed air cushions increase carrying comfort. Quick-release fasteners allow you to quickly attach and detach the carrying strap. The length of the strap is fully adjustable.



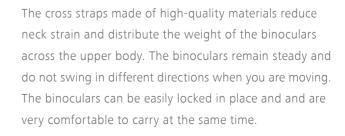

84






MAXIMUM TRANSMISSION AND MAGNIFICATION.

VICTORY HT

VICTORY HT premium binoculars allow you to experience hunting in a whole new dimension.

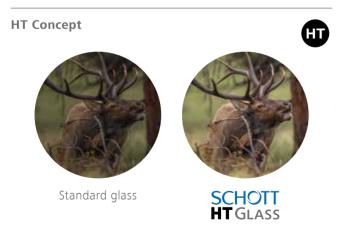

High-transmission SCHOTT lenses for optimal visibility in twilight and at night.

Thanks to a revolutionary optical concept, they stand out with light transmission values of 95 % and more. This is an unparalleled value that is achieved through the perfect combination of SCHOTT HT lenses, ZEISS T* multicoating, and the Abbe-König prism system and guarantees maximum brightness. This allows you to observe decisively longer on the hunt and also safely identify your target even in the deepest twilight.

The ComfortFocus Concept stands out thanks to its extremely precise focusing with a large focusing wheel embedded in the Double-Link bridge. This makes it extremely rugged, extremely easy to operate, and extremely durable. Experience cutting-edge optics – with the brightest binoculars from ZEISS.

Design based on tradition

The elegant design marks the continuation of the ZEISS Dialyt design – timeless and

to focus extremely precisely – even when wearing gloves. functional.

Extremely durable

The use of extremely solid, super-light magnesium guarantees maximum service life.

Light in the darkness

Form follows intuition

Maximum precision when focusing thanks to the

ComfortFocus Concept. The conspicuously large focusing

wheel and the deliberately long gear ratio make it possible

The combination of SCHOTT HT glass, ZEISS T* multicoating, and the Abbe-König prism system results in light transmission of 95 % and more.





SCHOTT HT GLASS

86 87

FOR TWILIGHT AND AT NIGHT. VICTORY HT.



Designed for twilight.

- High-transmission SCHOTT glass achieves a light transmission rate of 95 % and offers optimum visibility in low light conditions.
- FL glass produces natural colors, thereby enhancing imaging performance.
- Thanks to the large focusing wheel, the ComfortFocus Concept maximizes focusing precision, even when wearing gloves.
- Low weight and a modern design for unparalleled ergonomics.



ZEISS IN THE FIELD







HT 8/10×54

The HT 54 models are among the best performing binoculars from ZEISS for observation during twilight and at night. Thanks to a light transmission value of 95 %, maximum performance in low light is guaranteed. In addition, the 8×54 stands out due to its outstanding ergonomics and large exit pupil.



Care tips from ZEISS

The LotuTec® coating is both durable and abrasion-resistant, and its special surface creates a beading effect that makes cleaning the lens easier. We recommend using a ZEISS lens cleaning cloth to clean the lens surface.

Do not wipe off coarse particles on the lenses, such as sand. Instead, wash them off or remove them with a lens brush.

COMPARISON OF VICTORY HT MODELS.

Main use V Optical High seat/ Light Outdoor/ Birding/ transmission quality recreation Stalking nature observation **ZEISS Victory SF** SF 8×42 SF 10×42 SF 8 × 32 SF 10×32 **ZEISS SFL** SFL 8×40 90% SFL 10×40 **ZEISS Victory HT** HT 8×54 HT 10×54 **ZEISS Victory Pocket** Pocket 8×25 Pocket 10×25 **ZEISS Conquest HD** HD 8×42 HD 10×42 HD 8×32 HD 10×32 **ZEISS Terra ED / Pocket** ED 8×42 ED 10×42 ED 8×32 ED 10×32 Pocket 8×25 *Hydrophobic and antireflective coating.

TECHNICAL **SPECIFICATIONS**.

| Victory binoculars | Н | IT | |
|--|------------|-----------|--|
| Model | 8×54 | 10×54 | |
| Light transmission | 95 | 5 % | |
| Magnification | 8× | 10× | |
| Lens diameter | 54 | mm | |
| Exit pupil diameter | 6.7 mm | 5.4 mm | |
| Twilight factor | 20.7 | 23.2 | |
| Field of view (1,000 m) | 130 m | 110 m | |
| Angular field of view, real | 60° | 63° | |
| MOD | 3.! | 5 m | |
| Diopter adjustment range | +/ | -3 D | |
| Exit pupil distance | 16 | mm | |
| Interpupillary distance | 58-76 mm | | |
| Lens type | FL/HT type | | |
| Prism system | Abbe-König | | |
| LotuTec®/Nitrogen filling | Yes | / Yes | |
| Waterproof | 500 | 500 mbar | |
| Operating temperature | -30/- | -30/+63°C | |
| Length | 193 | 193 mm | |
| Width at an interpupillary distance of 65 mm | 142 | mm | |
| Weight | 1,035 g | 1,050 g | |
| Order no. | 52 56 28 | 52 56 29 | |

Subject to changes in design and scope of delivery as a result of ongoing technical development. More information can be found online at www.zeiss.com/consumer-products

ACCESSORIES



Air Cell Comfort Straps

The carrying strap makes carrying binoculars with a lens diameter of 30 mm or more much more comfortable.

The enclosed air cushions increase carrying comfort.

Quick-release fasteners allow you to quickly attach and detach the carrying strap. The length of the strap is fully adjustable.



Comfort Cross Straps

The cross straps made of high-quality materials reduce neck strain and distribute the weight of the binoculars across the upper body. The binoculars remain steady and do not swing in different directions when you are moving. The binoculars can be easily locked in place and and are very comfortable to carry at the same time.



92 93

PERFECT FOR WHEN ON THE GO.



A POCKET-SIZED PREMIUM OPTICAL DEVICE. VICTORY POCKET

Whether on a tour of the hunting grounds or on a spontaneous hunting trip, there's always something to discover and observe. That's why it's also a good idea to always have a pair of binoculars in your pocket. The ZEISS Victory Pocket binoculars are the perfect companions in these situations.

The Victory Pocket is a featherweight, versatile pair of pocket-sized, high-performance binoculars from ZEISS for almost any observation situation. Thanks to the binoculars' compact and lightweight format, they even fit into smaller pockets and are hardly noticeable thanks to their

With high magnification at an amazingly low weight and FL lenses with ZEISS T* multicoating, the Victory Pocket models deliver impressively clear views. Asymmetrical folding makes them particularly compact and the LotuTec® coating ensures that water beads off and dirt can be removed easily.

ZEISS 2022 / 2023 Hunting and Precision Shooting Catalog





Pocket 8/10 × 25

Tried-and-tested high-performance binoculars for virtually any observing situation. Due to the binoculars' compact size and light weight, they can even be carried comfortably in smaller jacket pockets.





Rugged design

Thanks to its modern and rugged design, the Victory Pocket can be taken anywhere and handles many situations.

Vibrant

Large field of view, FL glass, and T* multicoating for vibrant and high-contrast images.





COMPARISON OF **VICTORY POCKET MODELS**.

Main use V Optical Light Outdoor/ Birding/ High seat/ transmission quality Stalking recreation nature observation **ZEISS Victory SF** SF 8×42 SF 10×42 SF 8 × 32 SF 10×32 **ZEISS SFL** SFL 8×40 SFL 10×40 **ZEISS Victory HT ZEISS Victory Pocket** Pocket 8×25 Pocket 10×25 **ZEISS Conquest HD** HD 8×42 HD 10×42 HD 8×32 HD 10×32 **ZEISS Terra ED / Pocket** ED 8×42 ED 10×42 ED 8×32 ED 10×32 Pocket 8×25 *Hydrophobic and antireflective coating.

TECHNICAL **SPECIFICATIONS**.

| Victory binoculars | Po | cket | |
|--|----------------|------------|--|
| Model | 8×25 | 10×25 | |
| Light transmission | 91 | 1 % | |
| Magnification | 8× | 10× | |
| Lens diameter | 25 mm | 25 mm | |
| Exit pupil diameter | 3.1 mm | 2.5 mm | |
| Twilight factor | 14.1 | 15.8 | |
| Field of view (1,000 m) | 130 m | 105 m | |
| Angular field of view | 6 | 0° | |
| Close focusing distance | 1. | 9 m | |
| Diopter adjustment range | ± | 3 D | |
| Exit pupil distance | 16.5 | 5 mm | |
| Interpupillary distance | 34- | 74 mm | |
| Lens type | FL | | |
| Prism system | Schmidt-Pechan | | |
| LotuTec®/Nitrogen filling | Yes | / Yes | |
| Waterproof | 100 | mbar | |
| Operating temperature | -25/- | -25/+63 °C | |
| Length | 112 | 112 mm | |
| Width at an interpupillary distance of 65 mm | 100 |) mm | |
| Weight | 29 | 10 g | |
| Order no. | 52 20 38 | 52 20 39 | |

Subject to changes in design and scope of delivery as a result of ongoing technical development. More information can be found online at www.zeiss.com/consumer-products

ZEISS IN THE FIELD





Care tips from ZEISS

The LotuTec® coating is both durable and abrasion-resistant, and its special surface creates a beading effect that makes cleaning the lens easier. We recommend using a ZEISS lens cleaning cloth to clean the lens surface.

Do not wipe off coarse particles on the lenses, such as sand. Instead, wash them off or remove them with a lens brush.

ACCESSORIES

AntiFOG Kit

ZEISS AntiFOG spray is applied gently and quickly to the lens of your binoculars, riflescopes, or spotting scopes. The result; the lens remains fog free for up to 72 hours – without interfering with its optical quality. In order to ensure that ZEISS AntiFOG achieves the best results, the lens should first be cleaned with the included ZEISS lens cleaning wipe. This makes it easy to maintain a crystal clear view, even in extremely humid conditions.





AN ALL-AROUND TALENT IN HIGH DEFINITION. CONQUEST HD

The balanced Conquest HD binoculars offer excellent performance for an impressive hunting experience.

Thanks to its compact dimensions, light weight, and modern, rugged design, the Conquest HD makes comfortable observation possible in almost any conditions. Uncompromising design, ergonomics, and optical quality at an incredibly attractive price.

LotuTec[®]



Even in wet weather, there are impressive things to see during the hunt. ZEISS developed LotuTec® precisely for this purpose. This is a coating on the lenses that provides unobstructed visibility in all weather conditions.

Rugged design

Compact dimensions, low weight, and rugged body design ensure the binoculars are ready for use in all conditions.



High-contrast and vibrant

T* multicoating for vibrant and high-contrast images.



Nature in HD

High-resolution images and fine sharpness – experience optical devices that set standards thanks to the use of high-definition glass.

Optimized control elementsThe slightly slanted eyecups fit perfectly

and thus enhance ergonomics and

viewing comfort.



97

IMPRESSIVE DOWN TO

THE SMALLEST DETAIL. **CONQUEST HD.**





Conquer the outdoors in high definition.

- High-resolution images and fine sharpness thanks to high-definition glass.
- Compact dimensions, low weight, and modern design for unparalleled ergonomics.
- High light transmission values for impressive observations in twilight.
- Simple, intuitive operation.





HD 8/10×32

The compact design and low weight make the Conquest HD 8/10×32 a comfortably portable yet powerful companion with an extra-wide field of view thanks to the HD lens system.





HD 8/10×42

Made in Germany with extremely high standards of quality. Ideal for users looking for sharp, natural color rendering and outstanding quality at close range.





ZEISS IN THE FIELD





HD 8/10/15×56


This version is a specialist for difficult lighting conditions and stands out with sharp, high-contrast views. A tripod adapter is included with the 15×56 .



Care tips from ZEISS

The LotuTec® coating is both durable and abrasionresistant, and its special surface creates a beading effect that makes cleaning the lens easier. We recommend using a ZEISS lens cleaning cloth to clean the lens surface. Do not wipe off coarse particles on the lenses, such as sand. Instead, wash them off or remove them with a lens brush.

COMPARISON OF **CONQUEST HD MODELS**.

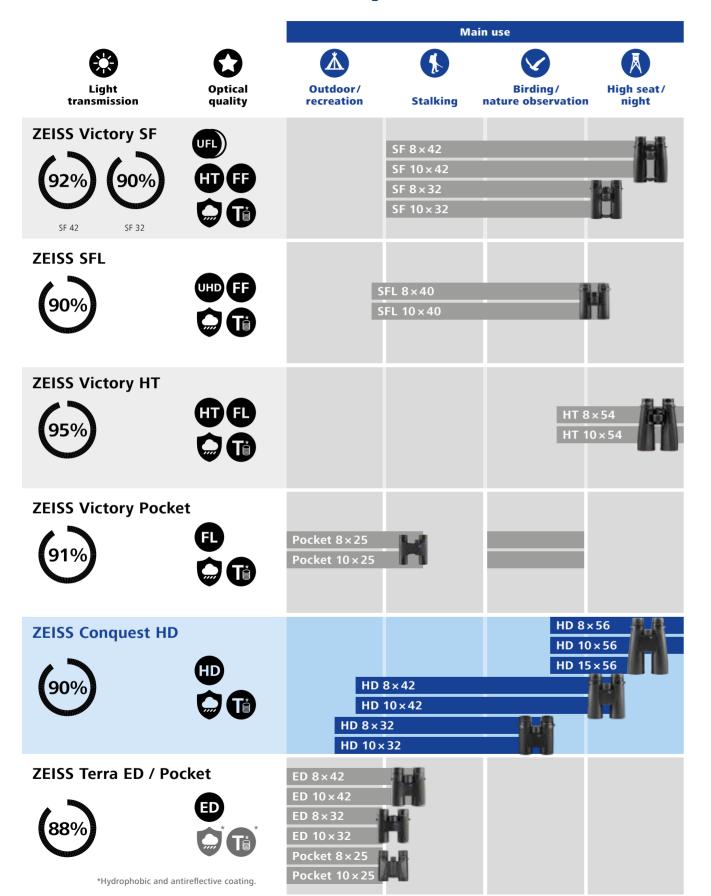

TECHNICAL **SPECIFICATIONS**.

| Conquest binoculars | | | | HD | | | |
|-----------------------------|--------|----------|---------|----------|-------|-------------|--------|
| Model | 8×32 | 10×32 | 8×42 | 10×42 | 8×56 | 10×56 | 15×56 |
| Light transmission | 9 | 0 % | 90 |) % | | 90 % | |
| Magnification | 8× | 10× | 8× | 10× | 8× | 10× | 15× |
| Effective lens diameter | 32 mm | 32 mm | 42 mm | 42 mm | 56 mm | 56 mm | 56 mm |
| Exit pupil diameter | 4 mm | 3.2 mm | 5.25 mm | 4.2 mm | 7 mm | 5.6 mm | 3.7 mm |
| Twilight factor | 16 | 17.9 | 18.3 | 20.5 | 21.2 | 23.7 | 29.0 |
| Field of view (1,000 m) | 140 m | 118 m | 128 m | 115 m | 125 m | 115 m | 80 m |
| Angular field of view, real | 64° | 68° | 59° | 66° | 57° | 66° | 69° |
| MOD | 1. | 5 m | 2 | m | | 3.5 m | |
| Diopter adjustment range | +/ | -4 D | +/- | -4 D | | +/-4 D | |
| Exit pupil distance | 16 | mm | 18 | mm | | 18 mm | |
| Interpupillary distance | 54- | 74 mm | 54-7 | 74 mm | | 54 – 74 mm | |
| Lens type | ı | HD. | Н | ID | | HD | |
| Prism system | Schmid | t-Pechan | Schmidt | t-Pechan | | Abbe-König | |
| Coating | LotuT | ec®/T* | LotuTe | ec®/T* | | LotuTec®/T* | |
| Nitrogen filling | ١ | 'es | Y | es | | Yes | |
| Watertightness | 400 | mbar | 400 | mbar | | 400 mbar | |
| Operating temperature | -20/- | +63 °C | -20/+ | +63 °C | | -20/+63°C | |
| Length | 132 | 2 mm | 150 | mm | | 210 mm | |

120 mm

795 q

52 42 12

795 g

52 42 11

Subject to changes in design and scope of delivery as a result of ongoing technical development. More information can be found online at www.zeiss.com/consumer-products

630 q

52 32 11

118 mm

630 q

52 32 12

ACCESSORIES

Width at an interpupillary

distance of 65 mm

Weight

Order no.



Air Cell Comfort Straps

The carrying strap makes carrying binoculars with a lens diameter of 30 mm or more much more comfortable.

The enclosed air cushions increase carrying comfort.

Quick-release fasteners allow you to quickly attach and detach the carrying strap. The length of the strap is fully adjustable.



1,265 g

52 56 31

145 mm

1,275 g

52 56 32

1,295 q

52 56 33

Comfort Cross Straps

The cross straps made of high-quality materials reduce neck strain and distribute the weight of the binoculars across the upper body. The binoculars remain steady and do not swing in different directions when you are moving. The binoculars can be easily locked in place and and are very comfortable to carry at the same time.

00

101

ZEISS



FOR DEMANDING ENTHUSIASTS.

TERRA ED

With its fiberglass-reinforced and waterproof housing, the ZEISS Terra ED will even satisfy hunters with the highest standards.

Its low weight makes the Terra ED a perfect companion that fits comfortably in any pocket. It features a compact, lightweight, and rugged design. Time-tested ZEISS quality delivers an outstanding observation experience, even under adverse conditions.

ZEISS IN THE FIELD



Thanks to the use of high-quality materials, ZEISS optical devices are always ready for use – even under extreme conditions. Binoculars and spotting scopes from ZEISS are 100% waterproof and nitrogen-filled, which prevents fogging from the inside, even during extreme temperature changes. The rubber armoring makes them rugged as well as shockproof and provides initial protection for the high-performance lenses inside the devices. This is how optical devices are created that can always be relied on.

Compact and lightweight

Terra ED binoculars stand out for their modern design and are both lightweight and comfortably compact thanks to their slim design.





A clear view in any weather

The ZEISS hydrophobic antireflective coating in combination with ED glass guarantees true-color images in any weather conditions.





ZEISS ZEISS 2022 / 2023 Hunting and Precision Shooting Catalog

COMPACT ZEISS QUALITY. TERRA ED.





Perfect for when on the go.

- Smooth and easy-to-grip focusing wheel for particularly simple and fast focusing.
- Fiberglass-reinforced and waterproof housing for rugged environments.
- ED glass and the hydrophobic multicoating deliver true-color images.



ED Pocket 8/10×25

The Terra ED Pocket is extremely compact and lightweight, delivers outstanding visual quality in its class, and stands out due to its user-friendly operation.







ED 8/10×32

Impressive optical performance, precise focusing, and a compact design are the hallmarks of the 32 mm version of the Terra ED.







ED 8/10×42


The Terra ED 42 features a bright viewing experience that is rich in detail as well as outstanding ease of use.





ZEISS

COMPARISON OF TERRA ED MODELS.

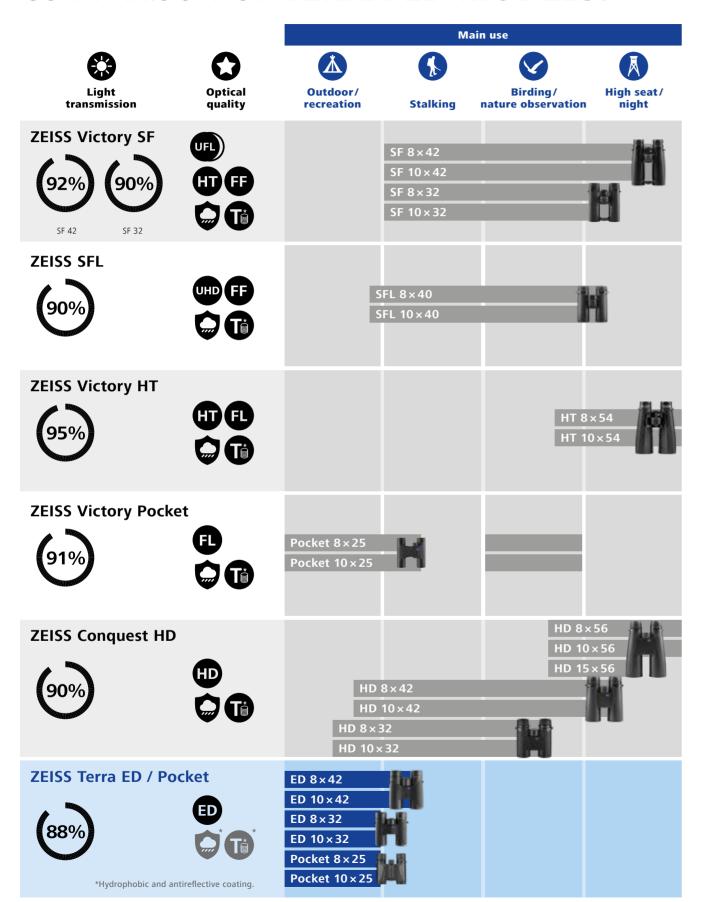

| Terra binoculars | | | | D | | |
|--|----------------|----------------|------------------|----------------|------------------|----------------|
| Model | 8×25 | 10×25 | 8×32 | 10×32 | 8×42 | 10×42 |
| Light transmission | 88 | 3 % | 88 | 3% | 88 | 3% |
| Magnification | 8× | 10× | 8× | 10× | 8× | 10× |
| Lens diameter | 25 | mm | 32 | mm | 42 | mm |
| Exit pupil diameter | 3.1 mm | 2.5 mm | 4 mm | 3.2 mm | 5.3 mm | 4.2 mm |
| Twilight factor | 14.1 | 15.8 | 16 | 17.9 | 18.3 | 20.5 |
| Field of view (1,000 m) | 119 m | 97 m | 135 m | 112 m | 125 m | 110 m |
| Angular field of view | 52° | 54° | 61° | 61° | 56° | 60° |
| Close focusing distance | 1.9 | 9 m | 1.6 | 5 m | 1.6 | 5 m |
| Diopter adjustment range | ± | 3 D | ±; | 3 D | ± | 3 D |
| Exit pupil distance | 16 | mm | 16.5 | 5 mm | 18 mm | 14 mm |
| Interpupillary distance | 35-7 | 72 mm | 56-7 | 74 mm | 58-7 | 5.5 mm |
| Lens type | E | D | E | D | E | D |
| Prism system | Schmidt | t-Pechan | Schmidt | -Pechan | Schmidt | -Pechan |
| Coating | Hydrophob | ic ZEISS MC | Hydrophob | ic ZEISS MC | Hydrophob | ic ZEISS MC |
| Nitrogen filling | Y | es | Y | es | Y | es |
| Watertightness | 100 | mbar | 100 | mbar | 100 | mbar |
| Operating temperature | -20/+ | +63 °C | -15/+ | -60 °C | -15/+ | -60 °C |
| Length | 111 | mm | 125 mm | | 142 mm | |
| Width at an interpupillary distance of 65 mm | 115 | mm | 117 | mm | 120 | mm |
| Weight | 31 | 0 g | 51 | 0 g | 72 | 5 g |
| Order no. black/green | | | 523203-9908 | 52 32 04-99 08 | 52 42 03-99 08 | 52 42 04-99 08 |
| black/black | 52 25 02-99 01 | 52 25 03-99 0 | 52 32 03-99 01 | 523204-9901 | 52 42 03-99 01 | 52 42 04-99 01 |
| black/gray | 52 25 02-99 07 | 52 25 03-99 07 | 52 32 03 - 99 07 | 52 32 04-99 07 | 52 42 03 - 99 07 | 52 42 04-99 07 |

Subject to changes in design and scope of delivery as a result of ongoing technical development. More information can be found online at www.zeiss.com/consumer-products

ACCESSORIES



Air Cell Comfort Straps

The carrying strap makes carrying binoculars with a lens diameter of 30 mm or more much more comfortable. The enclosed air cushions increase carrying comfort. Quick-release fasteners allow you to quickly attach and detach the carrying strap. The length of the strap is fully adjustable.



Comfort Cross Straps

The cross straps made of high-quality materials reduce neck strain and distribute the weight of the binoculars across the upper body. The binoculars remain steady and do not swing in different directions when you are moving. The binoculars can be easily locked in place and and are very comfortable to carry at the same time.



TRANSFORMING INTUITION INTO CERTAINTY.

VICTORY RANGEFINDER

Experienced hunters can always rely on their senses. But it takes the right gear to transform intuition into certainty.

The Victory Rangefinder system is a laser rangefinder with integrated real-time ballistic calculator. Taking all relevant factors and individual adaptability into account using the ZEISS Hunting App ensures accurate shots at all distances.

The Victory RF family includes four models: the Victory RF 8×42 and 10×42 for daytime hunting and the Victory RF 8×54 and 10×54 for hunting into the twilight hours.

Bluetooth



At ZEISS, we are never satisfied with the status quo. The RF's software is constantly being enhanced to improve performance even further. With Bluetooth and our ZEISS Hunting App, you can update your Victory RF model to the latest state of development at any time.

CERTAINTY THROUGH LASER MEASUREMENT.

Binocular real-time ballistics system

Equipped with various measurement functions, the Rangefinder takes a variety of relevant data into account and uses it to determine the exact value required to set the ASV for the most accurate results under all environmental conditions.









individual ballistic profiles created in the ZEISS Hunting App ensures the binoculars are perfectly adapted to the shooter's needs.



Everything in view

The Rangefinder measures the exact distance to the target with a maximum measuring distance of up to 2,300 meters. The combination of FL glass and ZEISS T* multicoating produces naturally vibrant images.










110 111



| Victory Rangefinder System | | RF S | ystem | |
|--|-------------|-------------------|---------------------|----------|
| Model | 8×42 | 10×42 | 8×54 | 10×54 |
| Magnification | 8× | 10× | 8× | 10× |
| Effective lens diameter | 42 | mm | 54 | mm |
| Exit pupil diameter | 5.3 mm | 4.2 mm | 6.8 mm | 5.4 mm |
| Twilight factor | 18.3 | 20.5 | 20.8 | 23.2 |
| Field of view | 135 m | 115 m | 120 m | 110 m |
| Angular field of view, real | 61° | 63° | 54° | 61° |
| MOD | 2.! | 5 m | 3. | 5 m |
| Diopter adjustment range | | +/-4D | | |
| Exit pupil distance | 16 | mm | 14 | mm |
| Interpupillary distance | 53.5- | 76 mm | 58.5- | 76 mm |
| Lens type | | I | -L | |
| Prism system | | Abbe | -König | |
| Coating | | LotuT | ec®/T* | |
| Nitrogen filling | | Υ | es | |
| Watertightness | 100 mbar | | | |
| Operating temperature | -25°C/+63°C | | | |
| Length | 166 | mm | 195 | mm |
| Width at an interpupillary distance of 65 mm | 130 | mm | 141 mm | |
| Weight | 930 g | 960 g | 1,095 g | 1,130 g |
| Measuring range | | 10-2 | ,300 m | |
| Measurement accuracy | | ±1 up to 600 m/ | ± 0.5% over 600 m | |
| Measuring time | | < 0. | 3 sec. | |
| Laser wavelength | | 905 | 5 nm | |
| Laser beam divergence | | 1.6× | 0.5 nm | |
| Battery | | 1 × lithium round | l cell 3V type CR 2 | |
| Battery life at +20 °C | | >2,5 | 500× | |
| Order no. | 52 45 48 | 52 45 49 | 52 56 48 | 52 56 49 |

Subject to changes in design and scope of delivery as a result of ongoing technical development. More information can be found online at www.zeiss.com/consumer-products

ZEISS HUNTING APP



The ability to synchronize the binoculars with the ZEISS Hunting App via Bluetooth perfects the Rangefinder system. The app allows you to transfer your individual ballistics data to the Rangefinder, share it with your friends, and manage your hunting grounds together with fellow hunters.

News

Dashboard

(b) Ballistics

Hunting diary

® Weather information

My gear A Hunting grounds

Connected products

Sharing



Bluetooth

RF 8/10×42

The Rangefinder model with a compact design. The binocular real-time ballistics system can be synchronized with the ZEISS Hunting App via Bluetooth.



RF 8/10×54

All of the features of the Rangefinder system combined with powerful optics. This model is ideal for all those with high optical standards.

Bluetooth



ZEISS IN THE FIELD








Care tips from ZEISS

The LotuTec® coating is both durable and abrasionresistant, and its special surface creates a beading effect that makes cleaning the lens easier. We recommend using a ZEISS lens cleaning cloth to clean the lens surface. Do not wipe off coarse particles on the lenses, such as sand. Instead, wash them off or remove them with a lens brush.

00

113

FOCUSING ON THE ESSENTIALS.

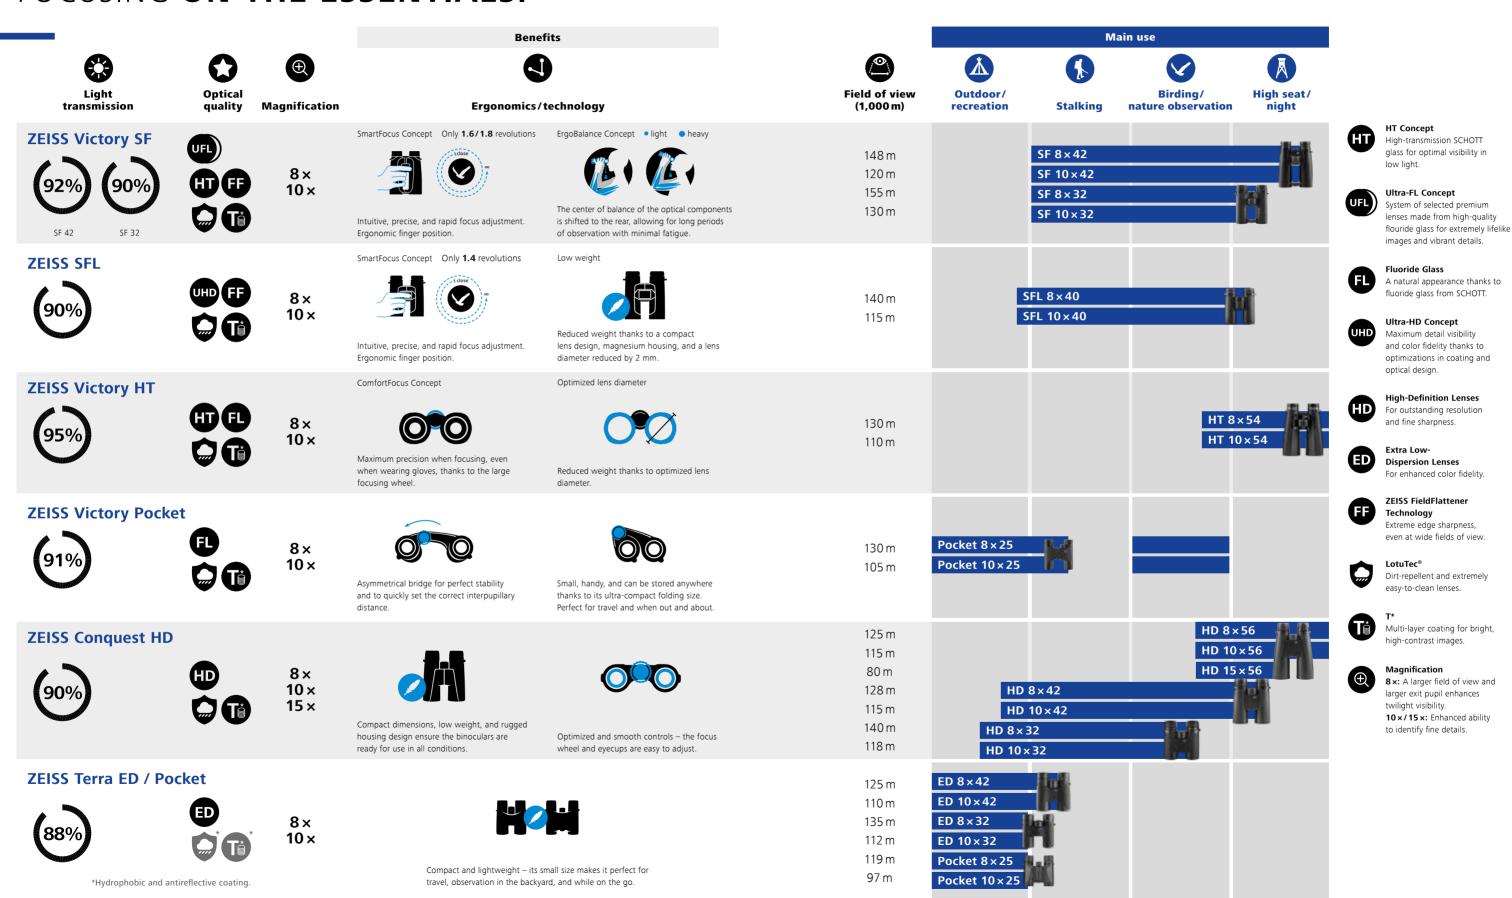

RELIABLY FASCINATING. OUR SPOTTING SCOPES.

Nature is always fascinating, even outside hunting season. Anyone who enjoys being outdoors and observing animals in their natural environment and wants to know their hunting grounds like the back of their hand needs the right, reliable gear for this purpose.

Spotting scopes from ZEISS meet these needs in a variety of ways – with true-to-detail and multifaceted reproduction, wide fields of view, and breathtaking levels of magnification. These are the qualities that make ZEISS spotting scopes popular worldwide and create very special moments in the great outdoors.

Further information is available on our website at www.zeiss.com/hunting/spotting-scopes



UNFORGETTABLE **EXPERIENCES**

Bright and clear viewing thanks to T* multicoating, the UFL Concept, SCHOTT fluoride glass, and the HD lens system.

EVERYTHING QUICKLY **IN VIEW**

Spotting scopes from ZEISS feature a wide range of

pages explain which products offer which specific

features and benefits in detail. Here's an initial

overview:

advanced technologies and innovations. The following

Comfortable and fast focusing thanks to DualSpeed Focus and the ComfortVision Concept.

EXTREMELY WIDE FIELD OF VIEW

See and discover more with high-resolution lens systems.

WEATHER RESISTANCE

Nature observation in any weather thanks to the LotuTec® coating.



EVEN CLOSER

TO THE HUNTING GROUND.



FROM **MAXIMUM FIELD OF VIEW**TO MAXIMUM **MAGNIFICATION**.

VICTORY HARPIA

The great outdoors are already truly fascinating when observed with the naked eye. But viewing nature through a Victory Harpia transforms it into an entirely new experience.

This spotting scope offers a new, exceptional lens system with $3 \times$ wide-angle zoom and up to $70 \times$ magnification with a choice of 85 or 95 mm lens diameter. Extremely wide fields of view are impressive in every situation. DualSpeed Focus enables fast and accurate focusing, even at high magnification.

Whether far away or up close, the unmatched dynamic performance of the Victory Harpia ensures that you remain in command of any unexpected observation situation.

ComfortVision Concept

Exceptionally wide viewing angle from $23 \times$ to $70 \times$ magnification for a noticeably enhanced overview in the field.



23×/30×

Field of view comparison of a spotting scope at $30 \times$ minimum magnification (small circle) with the field of view of the Harpia at $23 \times$ minimum magnification (large circle).



ZEISS





Harpia 95

The exceptional lens system features a $3 \times$ wide-angle zoom, up to $70 \times$ magnification, and a 95 millimeter lens diameter. Particularly noteworthy are the extremely wide fields of view, fast focusing, and precise focusing even at high magnifications.





Harpia 85

This spotting scope offers the same advantages as the Harpia 95 – with an 85 mm diameter lens. Thanks to FL glass and other special types of glass, the Harpia 85 provides an absolutely sharp and true-color view, even at maximum magnification.





ACCESSORIES



Professional Tripod

The ZEISS Professional tripod meets the highest standards in terms of compatibility and load-bearing capacity and offers particularly smooth panning. It is particularly suitable for our Victory products and for digiscoping.



Long Balance Plate

Our Long Balance Plate is the ideal solution to perfectly balance your spotting scope, especially when digiscoping (only for available for the Professional tripod).

TECHNICAL SPECIFICATIONS.

| Victory spotting scopes | Harpia | | | |
|-------------------------|----------------|----------------|--|--|
| Model | 85 | 95 | | |
| Light transmission | 88 % | 88 % | | |
| Focal length | 162 – 486 mm | 174 – 523 mm | | |
| Filter thread on lens | M86×1 | M95×1 | | |
| Lens diameter | 85 mm | 95 mm | | |
| Minimum object distance | 3.5 m | 4.5 m | | |
| Length × width × height | 121×103×384 mm | 124×109×408 mm | | |
| Weight without eyepiece | 1,934 g | 2,078 g | | |
| Waterproof | 400 mbar | | | |
| Nitrogen filling | Yes | | | |
| Order no. | 52 80 47 | 52 80 57 | | |

| | Eyep | oiece | | |
|-------------------------|----------------|----------------|--|--|
| Magnification | 22-65× | 23-70× | | |
| Focal length | 7.48 | 3 mm | | |
| Field of view (1,000 m) | 63.2-21 m | 58.8 – 19.5 m | | |
| Zoom factor | 3 | × | | |
| Exit pupil diameter | 2.50 – 1.31 mm | 2.50 – 1.34 mm | | |
| Diameter | 53 mm | | | |
| Length | 71 | 71 mm | | |
| Weight | 22 | 220 g | | |
| Order no. | 52.8 | 30 70 | | |

Includes eyepiece and lens cap. All feature ZEISS T* multicoating.

Subject to changes in design and scope of delivery as a result of ongoing technical development. More information can be found online at www.zeiss.com/consumer-products

| Harpia adapters | Order no. |
|-------------------|---------------|
| M49 photo adapter | 52 83 57-9901 |
| M52 photo adapter | 52 83 57-9902 |
| M58 photo adapter | 52 83 57-9903 |

ZEISS IN THE FIELD



119

Care tips from ZEISS

The LotuTec® coating is both durable and abrasion-resistant, and its special surface creates a beading effect that makes cleaning the lens easier. We recommend using a ZEISS lens cleaning cloth to clean the lens surface.

Do not wipe off coarse particles on the lenses, such as sand. Instead, wash them off or remove them with a lens brush.



Carrying Case for Victory Harpia

The pouch provides reliable protection against moisture and the elements, is comfortable to carry, and makes it possible to quickly use the spotting scope. The caps for the eyepiece and lens can be secured to the bag so you don't lose them.



ZEISS Photo Adapter

Whether for photography or videography, the photo adapter (M49, M52, M58) allows you to connect a digital camera directly to the Victory Harpia, turning the spotting scope into a powerful telephoto lens.

ZEISS 2022 / 2023 Hunting and Precision Shooting Catalog



ON THE ROAD WITH EXPLORERS.

CONQUEST GAVIA

Thanks to its impressive precision, low weight, and rugged construction, the ZEISS Conquest Gavia is an indispensable companion during expeditions off the beaten path.

The spotting scope with 85 mm objective lens diameter is particularly compact and lightweight. This makes it an ideal tool for both close-up and long-distance observation, especially in hard-to-reach areas. The spotting scope's minimum object distance is truly unique in this class, making it easy to view even the smallest objects.

The high-resolution lens system and fast, precise focus turn brief moments of observation into unforgettable views. Whether individual animals or an entire pack, with the Conquest Gavia 85's 60 x magnification, hunters and nature watchers are sure to enjoy the details of nature in any situation.



Even in wet weather, there are impressive things to see during the hunt. ZEISS developed LotuTec® precisely for this purpose. This is a coating on the lenses that provides unobstructed visibility in all weather conditions.

A COMPACT, LIGHTWEIGHT MODEL.

Perfect ergonomics

The spotting scope features a large focusing ring for precise operation and simple focusing.







Minimal MOD

object distance of only 3.3 meters is truly unique in this class, making it easy to view even the smallest objects.

Vibrant and rich in detail

High-precision roof prisms and high-definition glass produce highresolution images and fine sharpness. The T* multicoating delivers vibrant, high-contrast images.







Gavia 85

The spotting scope with 85 mm lens diameter is particularly compact and lightweight. This makes it an ideal tool for both close-up and long-distance observation, especially in hard-to-reach areas. The spotting scope's minimum object distance is truly unique in this class, making it easy to view even the smallest objects.



ZEISS IN THE FIELD

Care tips from ZEISS

The LotuTec® coating is both durable and abrasion-resistant, and its special surface creates a beading effect that makes cleaning the lens easier. We recommend using a ZEISS lens cleaning cloth to clean the lens surface.

Do not wipe off coarse particles on the lenses, such as sand. Instead, wash them off or remove them with a lens brush.



TECHNICAL **SPECIFICATIONS**.

| Gavia 85 |
|-------------------|
| 88% |
| 30-60× |
| 85 mm |
| 2.8 – 1.4 mm |
| 494 mm |
| 33 – 23 m |
| 3.3 m |
| HD |
| Yes / Yes |
| 400 mbar |
| M86×1 |
| 396 mm |
| Approx. 1,700 g |
| 52 80 48-0000-000 |
| |

Includes eyepiece and lens cap.

| iavia adapters | Order no. |
|-------------------|---------------|
| stro Adapter | 52 83 45 |
| 149 photo adapter | 52 83 48-9901 |
| 152 photo adapter | 52 83 48-9902 |
| 158 photo adapter | 52 83 48-9903 |

Subject to changes in design and scope of delivery as a result of ongoing technical development. More information can be found online at www.zeiss.com/consumer-products

ACCESSORIES



Carrying Case for Conquest Gavia

Specially designed for the Conquest Gavia, the pouch protects the spotting scope from external influences such as moisture and dirt. In addition, optimized carrying comfort, being able to quickly use the spotting scope, and the ability to secure the eyepiece and lens cap make the bag an indispensable piece of equipment.



Universal Tripod Plate

The universal tripod plate makes the Conquest Gavia compatible with a wide variety of tripods. Our Long Balance Plate is the ideal solution to perfectly balance your spotting scope, especially when digiscoping (only for available for the Professional tripod).

ZEISS 2022 / 2023 Hunting and Precision Shooting Catalog



PRECISION IN HARSH ENVIRONMENTS.

High-performance

identify targets at long distances thanks to its 45 × optical magnification.



124 125

Tripod Mount

The Dialyt $18-45 \times 65$ can be positioned using a backpack or tree and also

features a field-proven tripod mount.

For long observations or in the absence

of natural supports, we recommend

setting up the spotting scope with a ZEISS carbon tripod. A lightweight

monopod is another alternative.

The spotting scope impresses with detailed views and allows hunters to accurately

and heavy gear simply don't mix. As a result, when developing the Dialyt, we focused on compact dimensions, low weight, as well as reliability and durability.

Hunting in the mountains or in wide, flat country

DIALYT

THE IDEAL HUNTING COMPANION.

Intuitive operation and the rugged rubber armoring in the classic Dialyt design round out the spotting scope's numerous impressive features. All in all, this is the perfect spotting scope for reliable target identification at long distances.



Dialyt

The lightweight, compact "hunting spotting scope" is specially designed for fast and precise target identification at long distances. Reliable functionality, the waterproof, anti-fog design, and ease of use make it the ideal hunting companion.

| 18-45 × 65 18-45 × | |
|------------------------------|--|
| 18-45× | |
| | |
| 65 mm | |
| 3.6 mm/1.4 mm | |
| 40 m – 23 m | |
| 10 m | |
| Achromatic | |
| Yes | |
| 400 mbar | |
| 395×78×76 mm | |
| Approx. 1,195 g | |
| 52 80 07 | |
| | |

Includes eyepiece and lens cap. All feature ZEISS T* multicoating.

Subject to changes in design and scope of delivery as a result of ongoing technical development. More information can be found online at www.zeiss.com/consumer-products

Flexible

Lightweight

Bright, detailed views into the twilight hours for an excellent overview in all weather conditions or at any distance.

OUTSTANDING VISIBILITY, EVEN UNDER A NEW MOON VICTORY NV.

Rugged design

The rubber-armored housing is waterproof and nitrogen-filled, effectively protecting the optics and mechanical components from environmental influences.

A perfect combination

The 62 mm lens gathers available light and focuses it onto the high-sensitivity photocathode.



Superior image amplifier tube

The amplifier tube with approximately 20,000 times light amplification contains a microchannel plate (MCP) to generate detailed, high-contrast images at night.



5.6×62 NV

The latest image intensifier tubes use the minimal amount of light available to make the observed game appear 20,000 times brighter. In the absence of light, the built-in IR LED can be activated at the touch of a button. The LED emits infrared light that makes observations with the NV device possible up to a distance of approx. 50 meters. Connecting an additional flashlight with IR filter can extend the illumination range up to several hundred meters.

OTHER OPTICAL DEVICES FROM ZEISS. AN OVERVIEW.



ZEISS Mono

The 3×12 is a powerful miniature telescope with $3 \times$ magnification. It transforms Victory* and Conquest binoculars with a 30 mm lens or larger into a powerful spotting scope in the blink of an eye. Simply attach it to the eyepiece with an adapter ring. Can be used separately as a magnifying glass at close range.

* Cannot be used with Victory SF models.



AntiFOG Kit

ZEISS AntiFOG spray is applied gently and quickly to the lens of your binoculars, riflescopes, or spotting scopes. The result; the lens remains fog free for up to 72 hours – without interfering with its optical quality. In order to ensure that ZEISS AntiFOG achieves the best results, the lens should first be cleaned with the included ZEISS lens cleaning wipe. This makes it easy to maintain a crystal clear view, even in extremely humid conditions.



ZEISS Mono

For detailed observation at sporting events, the theater, or outdoors over long distances – the Mono models with ZEISS T* multicoating stand out for their bright, clear view and, depending on the model, can also be used as magnifying glasses.




20×60 S

Exceptional binoculars designed for the longest distances and even used on the International Space Station (ISS). The bright Porro prism system produces extremely sharp images with outstanding detail resolution, even at 20×10^{10} magnification. The technologically unrivaled mechanical image stabilization that allows you to simply "turn off" the unavoidable shaking that occurs during hand-held observation is what makes the $20 \times 60 \text{ T}^*$ S perfect.

12

EXPERIENCE ZEISS ONLINE.



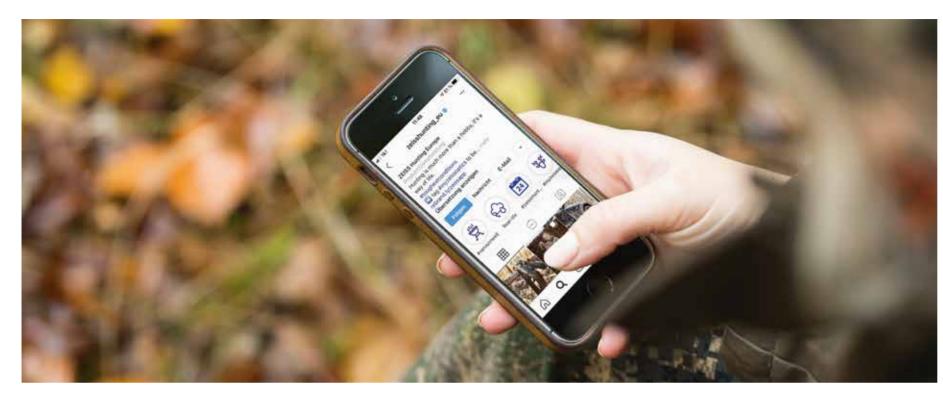



128 55 129

Become a part of the ZEISS
Hunting community! Our social
media profiles feature exciting
hunting-related content – from
inspiring European hunting
grounds to showcasing our
products in the wild and regional
game recipes.

Check out our Instagram account and Facebook page for regular visual updates from the field. Here you can view our products in action and receive exclusive information on new features. To have your own snapshot featured on the ZEISS Instagram page, simply add the hashtag #myzeissoptics below your photos.

The ZEISS Hunting blog offers many insights into the experiences of hunters from all over the world.

Get important tips and tricks on different types of hunting and learn background information on technological developments in the field of hunting optics.

Read exciting stories, some of them with impressive images, insightful field reports, and product endurance tests. In addition, you will find, for example, inspiration for delicious game recipes – always from hunters for hunters. Using the practical filter option, you can select the articles that interest you the most.

If you want to take a closer look at our products, subscribe to our ZEISS Hunting YouTube channel. Here you will find individual video playlists organized around specific topics, for example about the ZEISS Hunting App, stalking, or night hunting. External product tests and detailed reviews of our optical devices are also available here.

FOLLOW US ON THE WEB:

f facebook.com/ZEISSHunting

zeiss.com/hunting/blog

youtube.com/user/zeisssportsoptics

ZEISShunting_EU

ZEISS 2022 / 2023 Hunting and Precision Shooting Catalog

130 55 131

DESIGNED FOR PRECISION.

ZEISS ACCESSORIES.

| Bullet Drop Compensator (ASV) | Order no. |
|--|-----------|
| LongRange (ASV LR) for ZEISS V8 1.8–14×50, 2.8–20×56 | t duid |
| for elevation (new orders) | -040 |
| for windage (new orders) | -050 |
| Advanced LongRange (ASV-ALR) for ZEISS V8 4.8 – 35 × 60 | 50 70 5 |
| for elevation (new orders) | -040 |
| for windage (new orders) | -050 |
| ASV+ for Victory HT | |
| for elevation (new orders) | -010 |
| for elevation and windage (new orders) | -020 |
| BT V6 for Conquest V6 Ballistic turret (BT) | -060 |
| External windage (EW) | -070 |
| Throw Lever | Order no. |
| for ZEISS V8 and Conquest V6 | 2224-899 |
| for Conquest V4 | 2248-168 |
| Flip Cover | Order no. |
| for ZEISS V8, Victory HT | |
| Ø 30 mm | 2152-898 |
| Ø 50 mm | 2105-737 |
| Ø 56 mm | 2105-798 |
| Ø 60 mm | 2173-926 |

| Neoprene Cover | Order no. |
|--|-----------------|
| | 2 SSV |
| Size chart for suitable models at www.zeiss.com/hunting/accessoires | |
| Size S for V8 1.1 – 8 × 24, V6 1.1 – 6 × 24, | |
| V4 1-4×24 models | 2231-631 |
| Size M for HT 2.5 – 10 × 50, V6 2 – 12 × 50, | |
| V6 3-18×50, V4 4-16×44 models | 2231-632 |
| Size L for V8 1.8–14×50, V8 2.8–20×56, HT 3–12×56, | |
| $V6\ 2.5 - 15 \times 56$, $V6\ 5 - 30 \times 50$, $V4\ 3 - 12 \times 56$, $V4\ 6 - 24 \times 50$ models | 2231-633 |
| Size XL for V8 4.8–35×60 model | 2231-634 |
| Sunshades | Order no. |
| for ZEISS V8, Victory HT, Conquest V6 and Conquest V4 | |
| Ø 44 mm | 529860-0001-000 |
| Ø 50 mm | 529860-0002-000 |
| Ø 56 mm | 529860-0003-000 |
| DTC 3 adapter | Order no. |
| DTC-R M52 (one size) | 52 83 30 |
| | 5 |
| DTC-A 48 | 9 |
| for riflescopes with a lens diameter of 42 mm | 52 83 32 |
| DTC-A 56 | |
| for riflescopes with a lens diameter of 50 mm | 52 83 33 |
| DTC-A 62 | |
| for riflescopes with a lens diameter of 56 mm | 52 83 34 |
| | |

ZEISS

INCREASES PERFORMANCE.

ZEISS ACCESSORIES.

| Tripod Adapter | Order no. |
|--|---------------|
| Binofix universal tripod mount for all binocular models | 52 83 87 |
| Tot all billocalar filoacis | 32 03 07 |
| | |
| 1/4" tripod adapter for Conquest HD (included with the HD 15×56) | 52 83 88 |
| | |
| Magnification Attachment | Order no. |
| | |
| Mono 3 × 12 incl. carrying strap and leather pouch; | |
| triples normal binocular magnification | 52 20 12 |
| <u> </u> | |
| Adapter for Magnification Attachment | Order no. |
| | |
| | |
| for Victory FL/RF/HT (not SF) and Conquest HD 32 and 42 | 52 83 77 |
| for Conquest HD 56 & Victory RF | 52 83 79 |
| | |
| Accessories for Victory NV 5.6×62 | Order no. |
| | |
| | |
| SLR camera adapter | 52 30 06-9007 |
| 1" flashlight mount | 52 30 06-9006 |
| Mini Maglite adapter | 52 30 06-9008 |
| | |



| Cordura Pouches | Order no. |
|---|---------------------|
| for DTI 3/35 and DTI 3/25 | 2374-931 |
| for Victory SF 32/SFL 40 (pictured) | 2238-133 |
| for Victory HT 54 | 2074-447 |
| | |
| for Conquest HD 32/Terra ED 32 (pictured) | 52 90 35 |
| for Conquest HD 42/Terra ED 42 (pictured) | 1976-008 |
| for Conquest HD 56 | 1379-711 |
| | |
| Pouches | Order no. |
| | |
| Victory SF 42/RF 42 (pictured) | 2060-069 |
| Victory RF 54 | 2214-573 |
| Victory Pocket | 2165-340 |
| Terra ED Pocket | 2197-806 |
| | |
| Terra ED 32 (pictured) | 2196-165 |
| Terra ED 42 (pictured) | 2196-167 |
| Leather pouch for 20×60 S | 52 90 83 |
| | |
| Carrying strap | Order no. |
| | |
| Air Cell Comfort straps | Carl Zeiss 52 91 13 |
| | |

Comfort Cross straps for binoculars

ZEISS

TECHNICAL **SPECIFICATIONS**.

| Victory | Monos | | | Monos | | | |
|--------------------------|------------------|---------------|----------|----------|----------|-------------------|--|
| Model | 3×12 | 4×12 | 6×18 | 8×20 | 10×25 | MiniQuick® 5 × 10 | |
| Magnification | 3× | 4× | 6× | 8× | 10× | 5× | |
| Lens diameter | 12 | mm | 18 mm | 20 mm | 25 mm | 10 mm | |
| Exit pupil diameter | 4 mm | 3 | mm | 2.5 | mm | 2 mm | |
| Twilight factor | 6 | 6.9 | 10.4 | 12.6 | 15.8 | 7 | |
| Field of view (1,000 m) | 220 m | 180 m | 120 m | 110 m | 88 m | 100 m | |
| Angular field of view | 38° | 41° 51° | | 41° | | 29° | |
| Close focusing distance | 0.2 m | 0.25 m | 0.3 m | 3 m | 4.5 m | 4 m | |
| Diopter adjustment range | ±4D | | | | | | |
| Exit pupil distance | 12 mm | 12 mm 15 mm 1 | | | 16.5 mm | | |
| Lens type | Achromatic | | | | | | |
| Prism system | Schmidt-Pechan – | | | _ | | | |
| Waterproof | Splash-proof | | | | | | |
| Operating temperature | -20/+40 °C | | | | | | |
| Height × width | 58 mm | 70 mm | 94 mm | 101 mm | 119 mm | 113 mm | |
| Weight | 54 g | 45 g | 58 g | 67 g | 77 g | 23 g | |
| Order no. | 52 20 12 | 52 20 50 | 52 20 51 | 52 20 52 | 52 20 53 | 52 20 10 | |

All feature ZEISS T* multicoating.

Subject to changes in design and scope of delivery as a result of ongoing technical development.

| | Binoculars with image stabilization | |
|-----------------------------|-------------------------------------|--|
| Model | 20×60 S | |
| Magnification | 20× | |
| Lens diameter | 60 mm | |
| Exit pupil diameter | 3 mm | |
| Twilight factor | 34.6 | |
| Field of view (1,000 m) | 52 m | |
| Angular field of view, real | 60° wide angle | |
| MOD | 14 m | |
| Diopter adjustment range | ±7D | |
| Exit pupil distance | 13 mm | |
| Interpupillary distance | 57 – 73 mm | |
| Lens type | Achromatic | |
| Prism system | Porro | |
| Waterproof | Splash-proof | |
| Operating temperature | -20/+40°C | |
| Height × width | 275×161 mm | |
| Weight | 1,660 g | |
| Order no. | 52 60 00 | |

Includes neoprene carrying strap, eyepiece cap, and aluminum case.
Subject to changes in design and scope of delivery as a result of ongoing technical development.

| | Night Vision | |
|--------------------------|-----------------|--|
| Model | 5.6×62 NV | |
| Magnification | 5.6× | |
| Lens diameter | 62 mm | |
| Field of view (1,000 m) | 142 m | |
| MOD | 5 m | |
| Diopter adjustment range | +/-4 D | |
| Exit pupil distance | 20 mm | |
| Coating | LotuTec® | |
| Nitrogen filling | Yes | |
| Length × width × height | 233×100×80 mm | |
| Weight | Approx. 1,000 g | |
| Reticle: line spacing | 0.5 m / 100 m | |
| Measuring range/range | 500 m | |
| Order no. | 52 30 07-9901 | |

Package includes eyepiece and lens caps, carrying strap, cordura pouch, and two AA batteries.

Subject to changes in design and scope of delivery as a result of ongoing technical development.

TECHNICAL SPECIFICATIONS.

| | Tripod | Long Balance Plate | |
|--------------------|------------------|-----------------------|--|
| Model | Professional | | |
| Material | Carbon | | |
| Length when closed | Approx. 700 mm | for the | |
| Length when open | Approx. 1,820 mm | professional model | |
| Weight | Approx. 2,460 g | | |
| Order no. | 21 69-972 | 21 69-974 | |

| Model | Carrying Case for |
|-------------------|-------------------|
| Conquest Gavia 85 | 2169-979 |
| Victory Harpia 85 | 2169-977 |
| Victory Harpia 95 | 2169-976 |

| Model | Astro Adapter for |
|-----------------------------|-------------------|
| 1¼" astronomical telescopes | 52 83 85 |
| 2" astronomical telescopes | 52 83 86 |
| Astro adapter for DiaScope | 52 83 82 |



- facebook.com/ZEISSHunting
- zeiss.com/hunting/blog
- youtube.com/user/zeisssportsoptics
- ZEISShunting_EU

Customer Care

Carl Zeiss Sports Optics GmbH – Customer Care
Gloelstraße 3 – 5, 35576 Wetzlar, Germany
Phone +49-800-934-7733 | Fax +49-644-148-369
consumerproducts@zeiss.com

Carl Zeiss AG

Consumer Products Business Group Carl-Zeiss-Straße 22 73447 Oberkochen Germany

www.zeiss.com/hunting



